


भारतीय रेल Indian Railways

डीजल रेलइंजिन आधुनिकीकरण कारखाना, पटियाला Piesel Loco Modernation Morks, Patiala

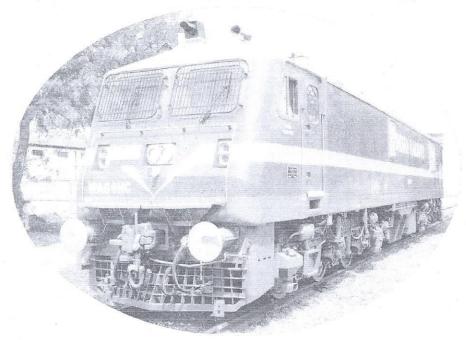

LOCO TESTING & DISPATCH REPORT OF IGBT BASED WAG9HC ELECTRIC LOCOMOTIVE

LOCO NO.:

41536

TYPE:

WAG9HC

RAILWAY SHED:

SWR/KJM

PROPULSION SYSTEM:

BT

DATE OF DISPATCH:

23.09.2021

लोको निर्माण रिकार्ड



डीजल रेलइंजिन आधुनिकीकरण कारखाना, पटियाला श्रिश्टर श्रिटर Modernisation Clocks. Patiala

LOCO NO.: 41536

RAILWAY/SHED: SWR/KJM DOD: SEPTEMBER 2021

INDEX

SN	PARA	ACTIVITIES	PAGE NO.
		Testing & Commissioning (TRS)	
1.	1.0	Continuity Test of the cables	
	1.1	Continuity Test of Traction Circuit Cables	
	1.2	Continuity Test of Auxiliary Circuit Cables	1-4
	1.3	Continuity Test of Battery Circuit Cables	
	1.4	Continuity Test of Screened Control Circuit Cables	
2.	2.0	Low Tension test	
	2.1	Measurement of resistor in OHMS (Ω)	5-6
	2.2	Check Points	3-0
	2.3	Low Tension Test Battery Circuits (without control electronics)	
3	3.0	Downloading of Software	
	3.1	Check Points	
	3.2	Download Software	7-10
	3.3	Analogue Signal Checking	
	3.4	Functional test in simulation mode	
4	4.0	Sensor test & convertor test	
	4.1	Test wiring Transformer Circuits – Polarity Test	
	4.2	Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)	
	4.3	Primary Voltage Transformer	
	4.4	Minimum voltage relay (Pos. 86)	11.10
	4.5	Maximum current relay (Pos. 78)	11-16
	4.6	Test current sensors	
	4.7	Test DC Link Voltage Sensors (Pos 15.6/*)	
	4.8	Verification of Converter Protection Circuits (Hardware limits)	
	4.9	Sequence of BUR contactors	
5.	5.0	Commissioning with High Voltage	
8	5.1	Check List	^
0.0	5.2	Safety test main circuit breaker	
	5.3	Auxiliary Converter Commissioning	
	5.3.1	Running test of 3 ph. auxiliary equipments	
	5.3.2	Performance of Auxiliary Converters	
- 1	5.3.3	Performance of BURs when one BUR goes out	16-25
	5.4	Auxiliary circuit 415/110	
	5.5	Hotel Load Circuit	2
	5.6	Traction Converter Commissioning	
	5.7	Test protective shutdown SR	1
	5.8	Test Harmonic Filter	
	5.9	Test important components of the locomotive	
6.	6.0	Running Trial of the locomotive	25-26
7.	7.0	Final Check List to be verified at the time of Loco dispatch	27
8.	8.0	Status of RDSO modifications	28
9.	1-10	Pneumatic Test Parameters	29 - 32
10.		Loco Check Sheet(LRS)	33
11.	- 1	Component History (LRS,TRS,ABS)	34-36
12.	-	Component History & Testing Parameter (Bogie Shop)	37 - 38
13	_	Warranty Conditions as per Tenders	39 -41

(Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41836
1.0 Continuity Test of the cables

Type of Locomotive: WAP-7/WAG-9HC

Page: 1 of 27

1.1 Continuity Test of Traction Circuit Cables

As per cable list given in Para 1.3 of document no. 3 EHX 410 124, check the continuity with continuity tester and megger each cable to be connected between following equipment with 500V megger.

From	То	Continuity (OK/Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Filter Cubicle	Transformer	0k	100 ΜΩ	1500
Filter Cubicle	Terminal Box of Harmonic Filter Resistor (Roof)	6k	100 ΜΩ	1500
Filter Cubicle	Earthing Choke	ok	100 ΜΩ	1500
Earthing Choke	Earth Return Brushes	0K	100 ΜΩ	1000
Transformer	Power Converter 1	ok	100 ΜΩ	1000
Transformer	Power Converter 2	ok	100 ΜΩ	1000
Power Converter 1	TM1, TM2, TM3	ok	100 ΜΩ	1000
Power Converter 2	TM4, TM5, TM6	ok	100 ΜΩ	1000
Earth	Power Converter 1	ok	100 ΜΩ	1500
Earth	Power Converter 2	ok	100 ΜΩ	1200

1.2 Continuity Test of Auxiliary Circuit Cables

As per cable list given in Para 1.4 of document no. 3 EHX 410 124, check the continuity with continuity meter and megger each cable to be connected between following equipment with the help of 500V megger.

Effective Date: March 2021

(Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 4,536

Type of Locomotive: WAP-7/WAG-9HC

Page: 2 of 27

From	То	Continuity(OK/ Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Transformer	BUR1	ok	100 ΜΩ	2000
Transformer	BUR2	OK	100 ΜΩ	2000
Transformer	BUR3	OK	100 MΩ	2000
Earth	BUR1	ok .	100 ΜΩ	2000
Earth	BUR2	ok	100 MΩ	2000
Earth	BUR3	ok	100 ΜΩ	2000
BUR1	HB1	OK	100 M Ω	2000
BUR2	HB2	OK	100 ΜΩ	2000
HB1	HB2	0/2	100 ΜΩ	2000
HB1	TM Blower 1	ok	100 ΜΩ	200
HB1	TM Scavenge Blower 1	ok	100 ΜΩ	150
HB1	Oil Cooling Unit 1	ok	100 ΜΩ	100
HB1	Compressor 1	ok	100 ΜΩ	200
HB1	TFP Oil Pump 1	OK	100 MΩ	200
HB1	Converter Coolant Pump 1	ok	100 ΜΩ	200
HB1	MR Blower 1	ok	100 ΜΩ	150
HB1	MR Scavenge Blower 1	ok	100 ΜΩ	250
HB1	Cab1	OK	100 MΩ	150
Cab1	Cab Heater 1	ok	100 ΜΩ	150
HB2	TM Blower 2	ok	100 ΜΩ	100
HB2	TM Scavenge Blower 2	ok	100 ΜΩ	150
HB2	Oil Cooling Unit 2	ok	100 ΜΩ	200
HB2	Compressor 2	ok	100 ΜΩ	200
HB2	TFP Oil Pump 2	ok	100 ΜΩ	150
HB2	Converter Coolant Pump 2	ok	100 ΜΩ	200
HB2	MR Blower 2	ok	100 ΜΩ	150
HB2	MR Scavenge Blower 2	0K	100 ΜΩ	150
HB2	Cab2	olc	100 ΜΩ	150
Cab2	Cab Heater 2	ok	100 ΜΩ	150

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

1.3 Continuity Test of Battery Circuit Cables

Page: 3 of 27

Check continuity of following cables as per Para 2.3 of document no. 3 EHX 610 299

From	То	Condition	Continuity (OK/Not OK)
Battery (wire no 2093)	Circuit breakers 110- 2, 112.1-1, 310.4-1	By opening and closing MCB 112	OK
MCB 110	Connector 50.X7-1	By opening and closing MCB 110	∂ _K
Battery (Wire no. 2052)	Connector 50.X7-2		OK
SB2 (Wire no 2050)	Connector 50.X7-3		2 K

Close the MCB 112, 110, 112.1, and 310.4 and	Prescribed value	Measured
measure the resistance of battery wires 2093, 2052, 2050 with respect to the loco earth.	> 0.5 MΩ	Value <u>I</u> O MΩ
Measure the resistance between 2093 & 2052, 2093 & 2050, 2052 &	Prescribed value:	Measured .
2050	> 50 MΩ	Value MΩ

Commission the indoor lighting of the locomotive as per Sheet No 7A & 7B.

1.4 Continuity Test of Screened Control Circuit Cables

Check the continuity and isolation of the screen cable of the following circuits with the help of sheet no. mentioned against each as per document no. 3 EHX 610 299.

Screened control circuit cables for	Corresponding Sheet Nos.	Continuity & Isolation (OK/Not OK)
Battery voltage measurement	04B	OK
Memotel circuit of cab1 &2	10A	OK
Memotel speed sensor	10A	OK
Primary voltage detection	01A, 12A	04
Brake controller cab-1 & 2	06F, 06G	OK



Effective Date: March 2021

(Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 4 of 27

Master controller cab-1 &2	08C, 08D	OK
ΓΕ/BE meter bogie-1 & 2	08E, 08F	οχ
Terminal fault indication cab-1 & 2	09F	OX
Brake pipe pressure actual BE electric	06H	OK
Primary current sensors	12B, 12F	OK
Harmonic filter current sensors	12B, 12F	οχ
Auxiliary current sensors	12B, 12F	οK
Oil circuit transformer bogie 1	12E, 12I	οχ
Magnetization current	12C, 12G	οχ
Traction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-1	12D	. ∂K
Fraction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-2	12D	OK
Fraction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-3	12D	OK
Fraction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-4	12H	οK
Fraction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-5	12H	ΟK
Fraction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-6	12H	OK
Frain Bus cab 1 & 2 (Wire U13A& U13B to earthing resistance= 10KΩ± ± 10%)	13A	OK
UIC line	13B	OK
Connection FLG1-Box TB	13A	Jok .

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 5 of 27

2.0 Low Tension test

2.1 Measurement of resistor in OHMS (Ω)

Measure the resistances of the load resistors for primary voltage transformer, load resistors for primary current transformer and Resistor harmonic filter as per Para 3.2 of the document no. 3 EHX 610 279.

Name of the resistor	Prescribed value	Measured value
Load resistor for primary voltage transformer (Pos. 74.2).	3.9 K $\Omega \pm 10\%$	3.9 KD
Resister to maximum current relay.	1Ω ± 10%	12
Load resistor for primary current transformer (Pos. 6.11).	3.3 Ω ± 10%	3.38
Resistance harmonic filter (Pos 8.3). Variation allowed \pm 10%	WAP7	WAP7
Between wire 5 & 6	0.2 Ω	0,22
Between wire 6 & 7	0.2 Ω	0.28
Between wire 5 & 7	0.4 Ω	0.45
For train bus, line U13A to earthing.	10 k Ω ± 10%	10.00
For train bus, line U13B to earthing.	10 k Ω ± 10%	10.062
Insulation resistance of High Voltage Cable from the top of the roof to the earth (by1000 V megger).	200 ΜΩ	300MS
Resistance measurement earth return brushes Pos. 10/1.	≤0.3 Ω	0.285
Resistance measurement earth return brushes Pos. 10/2.	≤0.3 Ω	0.28-52
Resistance measurement earth return brushes Pos. 10/3.	≤0.3 Ω	0.2852
Resistance measurement earth return brushes Pos. 10/4.	≤0.3 Ω	0.28-57
Earthing resistance (earth fault detection) Harmonic Filter –I; Pos. 8.61.	2.2 kΩ± 10%	2.19 KR
Earthing resistance (earth fault detection) Harmonic Filter –II; Pos 8.62.	2.7 k Ω± 10%	2.70KP
Earthing resistance (earth fault detection) Aux. Converter; Pos. 90.3.	3.9 k Ω ± 10%	3.88kg
Earthing resistance (earth fault detection) 415/110V; Pos. 90.41.	1.8 k Ω ± 10%	1.8 KS
Earthing resistance (earth fault detection) control circuit; Pos. 90.7.	390 Ω ± 10%	3905
Earthing resistance (earth fault detection) Hotel load; Pos. 37.1(in case of WAP5).	3.3 k Ω ± 10%	MA
Resistance for headlight dimmer; Pos. 332.3.	10 Ω ± 10%	1052

Effective Date: March 2021

Doc.No.F/TRS/01 (Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Note:

Page: 6 of 27

Make sure that the earthing brush device don't make direct contact with the axle housing, earth connection must go by brushes.

2.2 Check Points

Items to be checked	Remarks
Check whether all the earthing connection in roof and machine room as mentioned in sheet no. 22A is done properly or not. These earthing connections must be flexible and should be marked yellow & green	cheeped ox
Check whether all the earthing connection between loco body and bogie is done properly or not. These cables must be flexible having correct length and cross section	cheeked ox

2.3 Low Tension Test Battery Circuits (without control electronics)

These tests are done with the help of the special type test loop boxes as per procedure given in Para 3.6 of the document no. 3 EHX 610 279

Name of the test	Schematic used.	Remarks
Test 24V supply	Sheet 04F and other linked sheets	OK
Test 48V supply	Sheet 04F & sheets of group 09	Fan supply to be checked.
Test traction control	Sheets of Group 08.	OK
Test power supply bus stations.	Sheets of Group 09.	Fan supply to be checked.
Test control main apparatus	Sheets of Group 05.	عاد
Test earth fault detection battery circuit by making artificial earth fault to test the earth fault detection	Sheet 04C	0K
Test control Pneumatic devices	Sheets of Group 06	OK
Test lighting control	Sheets of Group 07	OK
Pretest speedometer	Sheets of Group 10	OK
Pretest vigilance control and fire system	Sheets of Group 11	0 K
Power supply train bus	Sheets of Group 13	OJC



Doc.No.F/TRS/01

(Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 415 36
3.0 Downloading of Software

Type of Locomotive: WAP-7/WAG-9HC

Page: 7 of 27

3.1 Check Points.	Yes/No
Check that all the cards are physically present in the bus stations and all the plugs are connected.	Yes
Check that all the fibre optic cables are correctly connected to the bus stations.	709
Make sure that control electronics off relay is not energized i.e. disconnect Sub-D 411.LG and loco is set up in simulation mode.	Yes
Check that battery power is on and all the MCBs (Pos. 127.*) in SB1 &SB2 are on	Yes

3.2 Download Software

The software of Traction converter, Auxiliary converter and VCU should be done by commissioning engineer of the firm in presence of supervisor. Correct software version of the

propulsion equipment to be ensured and noted:

propulsion equipment to be ensured and noted.	
Traction converter-1 software version:	1,0,3.6
Traction converter-2 software version:	1.0.3.6
Auxiliary converter-1 software version:	1.8.2.2
Auxiliary converter-2 software version:	2.8.2.2
Auxiliary converter-3 software version:	3.8.2.2
Vehicle control unit -1 software version:	1 . 6 . 8 . 7
Vehicle control unit -2 software version:	1.6.8.7

3.3 Analogue Signal Checking

Check for the following analogue signals with the help of diagnostic tool connected with loco.

Description	Signal name	Prescribed value	Measured
			Value
Brake pipe pressure	FLG2;0101XPrAutoBkLn	100% (= 5 Kg/cm2)	OK
Actual BE electric	FLG2; AMSB_0201- Wpn BEdem	100% (= 10V)	OK
TE/BE at 'o' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB 0101- Xang Trans	Between 9% and 11%	10%
TE/BE at 'TE maximal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 99 % and 101 %	120%
TE/BE at 'TE minimal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 20 % and 25 %	241'



DIESEL LOCO MODERNISATION WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 4,536

Type of Locomotive: WAP-7/WAG-9HC

Page: 8 of 27

TE/BE at 'BE maximal' position from both cab	FLG1; AMSB_0101- XangTrans FLG2; AMSB_0101- XangTrans	Between 99% and 101%	100%
TE/BE at 'BE Minimal' position from both cab	FLG1; AMSB_0101- XangTrans FLG2; AMSB_0101- XangTrans	Between 20% and 25%	257.
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1; AMS 0101- LT/BDEM>1/3 HBB2; AMS_0101- LT/BDEM>1/3	Between 42 and 44%	441.
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1; AMS_0101- LT/BDEM>2/3 HBB2; AMS_0101- LT/BDEM>2/3	Between 72 and 74%	741.
Both temperature sensor of TM1	SLG1; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0° C to 40° C	40°C
Both temperature sensor of TM2	SLG1; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	41°C
Both temperature sensor of TM3	SLG1; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	4°°
Both temperature sensor of TM4	SLG2; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	40°C
Both temperature sensor of TM5	SLG2; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	41°C
Both temperature sensor of TM6	SLG2; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	40°C



DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 9 of 27

3.4 Functional test in simulation mode

Conduct the following functional tests in simulation mode as per Para 5.5 of document no.3EHX 610 281. through the Diagnostic tool/laptop :

Test Function	Result desired in sequence	Result obtained
Emergency shutdown through emergency stop switch 244	VCB must open. Panto must lower.	cheeped on
Shut Down through cab activation switch to OFF position	VCB must open. Panto must lower.	cheeked ox
Converter and filter contactor operation with both Power Converters during Start Up.	FB contactor 8.41 is closed. By moving reverser handle: Converter pre-charging contactor 12.3 must close after few seconds. Converter contactor 12.4 must close. Converter re-charging contactor 12.3 must opens. By increasing TE/BE throttle: FB contactor 8.41 must open. FB contactor 8.2 must close. FB contactor 8.1 must close.	e Leened ox
Converter and filter contactor operation with both Power Converters during Shut Down.		

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC . Page: 10 of 27

Contactor filter adaptation by isolating any bogie	Isolate any one bogie through bogie cut out switch. Wait for self-test of the loco. • Check that FB contactor 8.1 is open. • Check that FB contactor 8.2 is open. After raising panto, closing VCB, and	checked OK
	setting TE/BEFB contactor 8.1 closes.FB contactor 8.2 remains open.	
Test earth fault detection battery circuit positive & negative	By connecting wire 2050 to earth, create earth fault negative potential. • message for earth fault • By connecting wire 2095 to earth, create earth fault positive potential. • message for earth fault	eforeward OK
Test fire system. Create a smoke in the machine room near the FDU. Watch for activation of alarm.	When smoke sensor-1 gets activated then • Alarm triggers and fault message priority 2 appears on screen. When both smoke sensor 1+2 gets activated then • A fault message priority 1 appears on screen and lamp LSF1 glow. • Start/Running interlock occurs and TE/BE becomes to 0.	petheexed ox
Time, date & loco number	Ensure correct date time and Loco number	OK

Doc.No.F/TRS/01

(Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 11 of 27

4.0 Sensor Test and Converter Test

4.1 Test wiring main Transformer Circuits

Apply $198V_p/140V_{RMS}$ to the primary winding of the transformer (at 1u; wire no. 2 at surge arrestor and at 1v; wire no. 100 at earthing choke). Measure the output voltage and compare

Output Winding nos.	following of the transformers. Description of winding.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
2U ₁ & 2V ₁	For line converter bogie 1 between cable 801A-804A	$10.05V_p$ and same polarity	10.041	OK
2U ₄ & 2V ₄	For line converter bogie 1 between cable 811A- 814A	10.05V _p and same polarity	10.04VP	OX
2U ₂ & 2V ₂	For line converter bogie 2 between cable 801B- 804B	10.05V _p and same polarity	10.0510	οκ
2U ₃ & 2V ₃	For line converter bogie 2 between cable 811B-814B	10.05V _p and same polarity	10.0410	OK
2U _B & 2V _B	For aux. converter 1 between cable 1103- 1117 (in HB1) For Aux converter 2 between cable 1103- 1117 (in HB2)	7.9V _p , 5.6V _{RMS} and same polarity.	7.8 VP 5.5 VRM	2 OK
2U _F & 2V _F	For harmonic filter between cable 4-12 (in FB)	9.12V _p , 6.45V _{RMS} and same polarity.	9./0VP 6.44VRm	SPOK

4.2 Test wiring auxiliary transformer 1000V/415V-110V (pos. 67) Apply $141V_p$ / $100V_{RMS}$ to input of the auxiliary transformer at cable no 1203-1117 and measure the output at

Description of wire no.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
Cable no. 1218 - 1200	58.7V 41.5V _{BMs} and opposite polarity.	58.5VP 41.4VRms	OK
Cable no. 1218 – 6500	$15.5V_p$, $11.0V_{RMS}$ and opposite polarity.	15.54P	OK

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 12 of 27

4.3 Primary Voltage Transformer

Apply $250V_{eff}/350V_p$ by variac to roof wire 1 and any wire 0 and measure the magnitude and polarity of the output of the primary voltage transformer for both bogies as per the procedure specified and suggested by the traction converter manufacturer. Primary voltage measurement converters (Pos. 224.1/*) & catenary voltmeter (Pos. 74/*)

This test is to be done for each converter.

Activate cab in driving mode and supply $200V_{RMS}$ through variac to wire no 1501 and 1502. Monitor the following parameters through Diagnostic tool and in catenary voltmeter.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1 G 87-XUPrim	25kV	250%	25KV	250%
SLG2 G 87-XUPrim	25 kV	250%	25KV	250%.

Decrease the supply voltage below 140 V_{RMS} . VCB must open at this voltage. In this case the readings in Diagnostic Tool and catenary voltmeter will be as follows.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1 G 87-XUPrim	17kV	170%	17×V	170%.
SLG2 G 87-XUPrim	17 kV	170%	17KV	170%.

Reactivate VCB to on by increasing this voltage to 175% (17.5 kV).

Increase the supply to 240 V_{RMS} through variac. VCB must open at this voltage, In this case the readings in diagnostic tool and catenary voltmeter will be as follows:

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1 G 87-XUPrim	30kV	300%	30KV	300%
SLG2 G 87-XUPrim	30 kV	300%	3047	300/

Reactivate VCB to on by decreasing this voltage to 290% (29 kV).

Effective Date: March 2021

Doc.No.F/TRS/01 (Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 13 of 27

4.4 Minimum voltage relay (Pos. 86)

Functionality test:

Functionality test.	1.1 COO/
Minimum voltage relay (Pos. 86) must be adjusted	to approx 68%
Activate loco in cooling mode. Check Power supply of 48V to minimum voltage relay. Disconnect primary voltage transformer (wire no. 1511 and 1512) from load resistor (Pos. 74.2) and connect variac to wire no. 1501 and 1502. Supply 200V _{RMS} through variac. In this case; <i>Minimum voltage relay (Pos. 86) picks up</i>	L(Yes/No)
	2 11 2
Try to activate the cab in driving mode: Contactor 218 do not close; the control electronics is not be working.	L(Yes/No)
Turn off the variac : Contactor 218 closes; the control electronics is be working	(Yes/No)
Test Under Voltage Protection;	
Activate the cab in cooling mode; Raise panto; Supply 200V _{RMS} through variac to wire no. 1501 & 1502; Close the VCB; Interrupt the supply voltage The VCB goes off after 2 second time delay.	√(Yes/No)
Again supply 200V _{RMS} through variac to wire no. 1501 & 1502; Decrease the supply voltage below 140V _{RMS} ± 4V; Fine tune the minimum voltage relay so that VCB opens.	WYes/No)

4.5 Maximum current relay (Pos. 78)

4.5 Maximum current relay (Fos. 78)	
Disconnect wire 1521 & 1522 of primary current transformer $\&1522$ (including the resistor at Pos. 6.11); Put loco in simulation on contact 136.3; Close VCB; supply $3.6A_{RMS}$ at the open wir maximum current relay Pos. 78 for correct over current value;	for driving mode; Open $R_3 - R_4$
VCB opens with Priority 1 fault message on	L(Yes/No)
display.	
Keep contact $R_3 - R_4$ of 136.3 closed; Close VCB; Tune the resistor	or 78.1 for the current of 7.0A _{RMS}
/9.9A _p at the open wire 1521;	
VCB opens with Priority 1 fault message on	Yes/No)
display.	
The state of the s	9

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 14 of 27

lame of the sensor	Description of the test	Prescribed value	Set/Measured value
rimary return current ensor (Test-1,Pos.6.2/1 6.2/2)	Activate cab in driving mode supply 10A. Measure the current through diagnostic tool or measuring print.	(Variation allowed is ± 10%)	
rimary return current	Supply 90mA _{DC} to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)		
sensor (Test-2, Pos.6.2/1 & 6.2/2)	Supply 297mA _{DC} to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)		298mg
nuxiliary winding urrent sensor (Pos. 12.3/1 & 42.3/2)	Supply 90mA _{DC} to the test winding of sensor through connector 415.AC/1or 2 pin no. $7(+)$ & $8(-)$ Supply 333mA _{DC} to the test winding of sensor through connector 415.AC/1 or 2 pin no. $7(+)$ & $8(-)$		334 min
Harmonic filter current sensors Pos.8.5/1 &8.5/2)	Supply 90mA _{DC} to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)		~
	Supply 342mA _{DC} to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)		340mA
Hotel load current sensors (Pos. 33/1 &	Switch on hotel load. Supply 90mA _{DC} to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) 8 8(-)		MA
33/2)	Supply 1242mA _{DC} to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) & 8(-)	MA	MA

Doc.No.F/TRS/01

(Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 15 of 27

4.7 Test DC Link Voltage Sensors (Pos 15.6/*)

This test is to be done by the commissioning engineer of the firm if required.

4.8 Verification of Converter Protection Circuits (Hardware limits) -

This test is to be done as per para 6.17 of the document no. 3EHX 610 282 for both the converters.

Protection circuits	Limit on which shutdown should take place	Measured limit
Current sensors (Pos 18.2/1, 18.2/2, 18.2/3, 18.4/4, 18.5/1, 18.5/2, 18.5/3) for Power Converter 1	Increase the current quickly in the test winding of the current sensors, VCB will off at 2.52A with priority 1 fault for each sensor.	For 18.2/1= For 18.2/2= For 18.2/3= For 18.4/4= For 18.5/1= For 18.5/2= For 18.5/3=
Current sensors (Pos 18.2/1, 18.2/2, 18.2/3, 18.4/4, 18.5/1, 18.5/2, 18.5/3) for Power Converter 2	Increase the current quickly in the test winding of the current sensors, VCB will off at 2.52A with priority 1 fault for each sensor.	For 18.2/1= For 8.2/2= For 18.2/3= For 18.4/4= For 18.5/1= For 18.5/2= For 18.5/3=
Fibre optic failure In Power Converter1	Remove one of the orange fibre optic plugs on traction converter. VCB should trip	OK
Fibre optic failure In Power Converter2	Remove one of the orange fibre optic plugs on traction converter. VCB should trip	OK

4.9 Sequence of BUR contactors

The sequence of operation of BUR contactors for 'ALL BUR OK' BUR 1 out BUR 2 out and BUR 3 out condition has to be verified by putting the Loco in driving mode (VCB should not be closed) and isolating the BURs one by one. In these condition following will be the contactor sequence.

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
AI BUR OK	Close	Open	Close	Open	Close	Open	Close	Close	Open
BUR1 off	Close	Open	Close	Close	Open	Close	Open	Open	Close
BUR2 off	Open	Open	Close	Close	Close	Close	Open	Open	Close
BUR3 off	Open	Close	Open	Close	Close	Close	Open	Open	Close



Doc.No.F/TRS/01

(Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 16 of 27

Monitored contactor sequence

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
AI BUR OK	clos	open	clos	oben	close	open	clos	closs	open
BUR1 off	close	open	clos	class	open	clos	open	open	closs
BUR2 off	open	open	clos	closs	clas	clas	open	open	clos
BUR3 off	open	close	open	closs	close	close	Open	oper	close

5.0 Commissioning with High Voltage

5.1 Check List

tems to be checked	Yes/No
ibre optic cables connected correctly.	Yes
No rubbish in machine room, on the roof, under the loco.	Yes
All the electronic Sub-D and connectors connected	Yes
All the MCBs of the HB1 & HB2 open.	Yes
All the three fuses 40/* of the auxiliary converters	Yes
The fuse of the 415/110V auxiliary circuit (in HB1) open.	Yes
Roof to roof earthing and roof to cab earthing done	Yes
Fixing, connection and earthing in the surge arrestor done correctly.	Yes
Connection in all the traction motors done correctly.	Yey
All the bogie body connection and earthing connection done correctly.	Yes
Pulse generator (Pos. 94.1) connection done correctly.	Yes
All the oil cocks of the gate valve of the transformer in open condition.	Yes
All covers on Aux & Power converters, Filter block, HB1, HB2 fitted	Yes
KABA key interlocking system.	1/2

5.2 Safety test main circuit breaker

Prepare to switch off the catenary supply during the first charging of the locomotive in case of any unexpected behavior of the electrical component of the loco. Charge the loco for the first time by closing BLDJ switch. The VCB will trip after certain time as no oil/coolant pumps are running yet.

Perform the following safety test of main circuit breaker through both the cabs of the locomotive.

DIESEL LOCO MODERNISATION WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC Page: 17 of 27

Name of the test	Description of the test	Expected result	Monitored result
Emergency stop in cooling mode	Raise panto in cooling mode. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	choised ox
Emergency stop in driving mode	Raise panto in driving mode in. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	checkedok
Under voltage protection in cooling mode	Raise panto in cooling mode. Close the VCB. Switch off the supply of catenary by isolator	VCB must open.	cherred or
Under voltage protection in driving mode	Raise panto in driving mode. Close the VCB. Switch off the supply of catenary by isolator	VCB must open with diagnostic message that catenary voltage out of limits	Chaupael OK
Shut down in cooling mode.	Raise panto in cooling mode. Close the VCB. Bring the BL- key in O position.	VCB must open. Panto must lower.	Cherpoolok
Shutdown in driving mode	Raise panto in driving mode. Close the VCB. Bring the BL-key in O position.	VCB must open. Panto must lower.	cheucedou
Interlocking pantograph- VCB in cooling mode	Raise panto in cooling mode. Close the VCB. Lower the pantograph by ZPT	VCB must open.	cherredor
Interlocking pantograph- VCB in driving mode	Raise panto in driving mode. Close the VCB. Lower the pantograph by ZPT	VCB must open.	chercelor

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 18 of 27

5.3 Auxiliary Converter Commissioning

Switch on the high voltage supply and set up the loco in driving mode. Raise the panto. Close the VCB. Check that there is no earth fault in the auxiliary circuit, Switch off the VCB. Lower the panto. Create the earth fault in auxiliary circuit by making connection between wire no 1117(in HB2 cubicle) and earth. After 3 minutes a diagnostic message will come that "Earth fault auxiliary circuit."

5.3.1 Running test of 3 ph. auxiliary equipments

Switch on the 3 ph. auxiliary equipment one by one. Check the direction of rotation of each auxiliary machine and measure the continuous current and starting current drawn by them.

Name of the auxiliary machine	Typical phase current	Measured continuous phase current	Measured starting phase current
Oil pump transformer 1	9.8 amps	10.2	11.4
Oil pump transformer 2	9.8 amps	11.0	120
Coolant pump converter 1	19.6 amps	5-4	6.1
Coolant pump converter 2	19.6 amps	5.6	6 -0
Oil cooling blower unit 1	40.0 amps	40.0	119.0
Oil cooling blower unit 2	40.0 amps	40.0	125.0
Traction motor blower 1	34.0 amps	3015	11810
Traction motor blower 2	34.0 amps	30.0	115.0
Sc. Blower to Traction motor blower 1	6.0 amps	3.0	6.7
Sc. Blower to Traction motor blower 1	6.0 amps	2.6	6.9
Compressor 1	25 amps at 0 kg/cm ² 40 amps at 10 kg/cm ²	28.0	75.0
Compressor 2	25 amps at 0 kg/ cm ² 40 amps at 10 kg/ cm ²	28.0	74.0



Effective Date: March 2021

Doc.No.F/TRS/01 (Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 19 of 27

5.3.2 Performance of Auxiliary Converters

Measure the performance of the auxiliary converters through software and record it. BUR1 (Condition: Switch off all the load of BUR 1)- to be filled by commissioning engineer

Signal name	Description of the signal	Prescribed value	Monitored value	Value under Limit (Yes/No)
BURI 7303 XUUN	Input voltage to BUR1	75% (10%=125V)	1050V	yes
BUR1 7303 XUUZ1	DC link voltage of BUR1	60% (10%=100V)	636	Yes
BUR1 7303 XUIZ1	DC link current of BUR1	0% (10%=50A)	JAMY	Yes

BUR2 (Condition: Switch off all the load of BUR 2, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed value by the firm	Monitored value	Value under Limit (Yes/No)
BUR2 7303-XUUN	Input voltage to BUR2	75% (10%=125V)	10541	Yes
BUR2 7303-XUUZ1	DC link voltage of BUR2	60% (10%=100V)	636V	Yes
BUR2 7303-XUIZ 1	DC link current of BUR2	1% (10%=50A)*	6 Am)	Yes
BUR2 7303-XUILG	Current battery charger of BUR2	3% (10%=100A)*	22 Amh	Yes
BUR2 7303-XUIB1	Current battery of BUR2	1.5%(10%=100A)*	12Am	Yes
BUR2 7303 -XUUB	Voltage battery of BUR2	110%(10%=10V)	1102	Yes

^{*} Readings are dependent upon charging condition of the battery.

BUR3 (Condition: Switch off all the load of BUR 3, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed set value by the firm	Monitored value	Value under limit (Yes/No)
BUR3 7303-XUUN	Input voltage to BUR3	75% (10%=125V	10542	Yes
BUR3 7303- XUUZ1	DC link voltage of BUR3	60% (10%=100V)	636V	Yes
BUR3 7303-XUIZ 1	DC link current of BUR3	1% (10%=50A)*	duny L	Yes
BUR3 7303-XUILG	Current battery charger of BUR 3	3% (10%=100A)*	24 Am	Yes
BUR3 7303-XUIB1	Current battery of BUR 3	1.5%(10%=100A)*	14Am	Yes
BUR3 7303-XUUB	Voltage battery of BUR 3	110%(10%=10V)	110 V	Yey

^{*} Readings are dependent upon charging condition of the battery.

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 4153%

Type of Locomotive: WAP-7/WAG-9HC Page: 20 of 27

5.3.3 Performance of BURs when one BUR goes out

When any one BUR goes out then rest of the two BURs should take the load of all the

auxiliaries at ventilation level 3 of the locomotive.

Condition of BURs	Loads on BUR1	Loads in BUR2	Loads in BUR3	
All BURs OK	Oil Cooling unit 1&2	TM blower1&2, TFP oil pump 1&2, SR coolant pump 1&2.	Compressor 1&2, Battery charger and TM Scavenger blower 1&2	
BUR 1 out		Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2,TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.	charact
BUR 2 out	Oil Cooling unit 1&2, TM blower 1&2, TM Scavenger blower 1&2		Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.	
BUR 3 out	Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.		

5.4 Auxiliary circuit 415/110

For checking earth fault detection, make a connection between wire no. 1218 and vehicle body. On switching on VCB, Earth fault relay 89.5 must pick up and after 3 minutes a message will come in the Diagnostic display that Earth Fault 415/110V Circuit

Switch on the 1 ph. auxiliary equipment one by one. Check the direction of rotation of each auxiliary machine and measure the continuous current and starting current drawn by them.

auxiliary machine and measure Name of the auxiliary machine	Typical phase current	Measured phase current	Measured starting current
Machine room blower 1	15.0 amps*	5,5	30.0
Machine room blower 2	15.0 amps*	6.0	32.0
Sc. Blower to MR blower 1	1.3 amps	2.8	8.9
Sc. Blower to MR blower 2	1.3 amps	2.9	8.8
Ventilator cab heater 1	1.1 amps	1.0	1.3
Ventilator cab heater 2	1.1 amps	1.0	1.3
Cab heater 1	4.8 amps	4.9	57-0
Cab heater 2	4.8 amps	4,9	5.9

^{*} For indigenous MR blowers.

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 4/536

Type of Locomotive: WAP-7/WAG-9HC

Page: 21 of 27

5.5 Hotel load circuit (Not applicable for WAG-9HC)

For WAP-7 locomotive with Hotel load converter refer to Annexure-HLC

5.6 Traction Converter Commissioning

This test is carried out in association with Firm.

Traction converter commissioning is being done one at a time. For testing Converter 1, switch off the traction converter 2 by switch bogie cut out switch 154. For testing Converter 2, switch off the traction converter 2 by switch bogie cut out switch 154. Isolate the harmonic filter also by switch 160. Start up the loco by one converter. Follow the functionality tests.

For Converter 1

Test Function	Results desired	Result obtained
Measurement of charging and pre-charging and charging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	charged ox
Measurement of discharging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	cheekeel ok
Earth fault detection on positive potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	cheeked on
Earth fault detection on negative potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	cherred on
Earth fault detection on AC part of the traction circuit of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	cheuced ou
Pulsing of line converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	cherkedor
Pulsing of drive converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	chemad on

£8

Issue No.02

Effective Date: March 2021

Doc.No.F/TRS/01 (Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 22 of 27

For Converter 2

est Function	Results desired in sequence	Result obtained
harging and pre- harging and charging	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	cherred ok
Measurement of discharging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	cheeped on
positive potential of DC Link of Converter 2.	demonstrate the same to the DMW supervisor.	cherred or
Earth fault detection on negative potential of DC Link of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/v	checkool ok
Earth fault detection or AC part of the traction circuit of Converter 2.	declare the successful operation and demonstrate the same to the DMW supervisor.	checked ok
Pulsing of line converte of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	checked OK
Pulsing of drive converter of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the DMW supervisor.	e Leucedok

Effective Date: March 2021

Doc.No.F/TRS/01 (Ref: WI/TRS/10)

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 23 of 27

5.7 Test protective shutdown SR

Test Function	Results desired in sequence	Result obtained
Measurement of protective shutdown by Converter 1 electronics.	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Remove one of the orange fibre optic feedback cable from converter 1Check that converter 1 electronics produces a protective shut down. • VCB goes off • Priority 1 fault mesg. on DDU appears	cherred or
Measurement of protective shutdown by Converter 2 electronics.	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Remove one of the orange fibre optic feedback cable from converter 2. Check that converter 2 electronics produces a protective shu down. • VCB goes off • Priority 1 fault mesg. on diagnostic display appears Disturbance in Converter 2	

5.8 Test Harmonic Filter

Switch on the filter by switch 160

Test Function	Results desired in sequence	Result obtained
Measurement of filter currents	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Apply a small value of TE/BE by moving the throttle. • FB contactor 8.41 must open.	changed ou

As .

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 24 of 27

	• FB contactor 8.2 must close.	
	 FB contactor 8.1 must close 	
	 Check the filter current in 	N 11" =
	diagnostic laptop	
	Bring the TE/BE throttle to O	- 1 0 1 may 1 818
	Switch off the VCB	petersel or
	• FB contactor 8.1must open.	
	• FB discharging contactor 8.41	
	must close	
	 Check the filter current in 	0.000
	diagnostic laptop	
Test earth fault	Make a connection between wire	0
detection harmonic	no. 12 and vehicle body. Start up	
filter circuit.	the loco. Close VCB.	
	• Earth fault relay 89.6 must pick up.	1
	Diagnostic message comes that -	cherkedok
	Earth fault in harmonic filter circuit	
Test traction motor	Traction converter manufacturer	9
speed sensors for	to declare the successful operation	E cherced ou
both bogie in both	and demonstrate the same to the	
cabs	supervisor/ DMW	Ψ

5.9 Test important components of the locomotive

Items to be tested	Description of the test	Monitored value/remarks
Speedometer	VCU converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/ DMW	chercel or
Time delay module of MR blower	The time after which the starting capacitor for MR blower should go off the circuit should be set to 10-12 seconds	chercedou
Ni-Cd battery voltage	At full charge, the battery voltage should be 110V DC.	CLEEKEdOK
Flasher light	From both cab flasher light should blink at least 65 times in one minute.	Cherkeelon
Head light	Head light should glow from both cabs by operating ZLPRD. Dimmer operation of headlight should also occur by operating the switch ZLPRD.	checkedou

Ss

DIESEL LOCO MODERNISATION WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 25 of 27

Marker light	Both front and tail marker light should glow from both the cabs	e Relxed or
Cab Light	Cab light should glow in both the cabs by operating the switch ZLC	checkolok
Spot lights	Both Drivers and Asst. Drivers Spot light should glow in both cabs by operating ZLDD	cheupeolou
Instrument lights	Instrument light should glow from both cab by operating the switch ZLI	cherceel on
Illuminated Push button	All illuminated push buttons should glow during the operation	Checcolou
Contact pressure of the high rating contactors	The contact pressure of FB contactors (8.1, 8.2) is to be measured Criteria: The minimum contact pressure is 54 to 66 Newton.	For contactor 8.1: For contactor 8.2:
Crew Fan	All crew fans should work properly when VCB of the loco is switched on. The airflow from each cab fan is to be measured. Criteria: The minimum flow of air of cab fan should be 25 m ³ /minute	Cab 1 LHS: Cab 1 RHS: Cab 2 LHS: Cab 2 RHS:

6.0 Running Trial of the locomotive

SN	Description of the items to be seen during trail run	b activation in driving No fault message should appear on the diagnostic panel of		
1	Cab activation in driving mode			
	Loco charging	Loco to be charged and all auxiliaries should run. No fault message to appear on the diagnostic panel of the loco. Raise MR pressure to 10 Kg/cm ² , BP to 5 Kg/cm ² , FP to 6 Kg/cm ² .	cherred	
3.	Check function of Emergency push stop.	This switch is active only in activated cab. By pushing this switch VCB should open & pantograph should be lowered.	cherce	
4.	Check function of BPCS.	 Beyond 5 kmph, press BPCS, the speed of loco should be constant. BPCS action should be cancelled by moving TE/BE throttle, by dropping BP below 4.75 Kg/cm², by pressing BPCS again. 	charco	
5.	Check train parting operation of the Locomotive.	Operate the emergency cock to drop the BP Pressure LSAF should glow.	cherry	



DIESEL LOCO MODERNISATION WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 26 of 27

6.	Check vigilance	Set the speed more than 1.5 kmph and ensure that	5)
	operation of the	brakes are released i.e. BC < 1 Kg/cm ² .	
	locomotive	For 60 seconds do not press vigilance foot switch or	
		sanding foots switch or TE/BE throttle or BPVG	
		switch then	of a cool
		Buzzer should start buzzing.	chaired
		 LSVW should glow continuously. 	
		Do not acknowledge the alarm through BPVG or	
		vigilance foot switch further for 8 seconds then:-	
		 Emergency brake should be applied automatically. 	
		VCB should be switched off. Provide a of this populty broke is possible only after.	
	* * * * * * * * * * * * * * * * * * * *	Resetting of this penalty brake is possible only after	
- 1		180 seconds by bringing TE/BE throttle to 0 and acknowledge BPVR and press & release vigilance	
		foot switch.	
7			chalked IK
7.	Check start/run interlock	• At low pressure of MR (< 5.6 Kg/cm ²).	NA
	2 1 2 2	With park brake in applied condition. 2.	94.7
		• With direct loco brake applied (BP< 4.75Kg/cm ²).	(chercodo
		 With automatic train brake applied (BP<4.75Kg/cm²). 	
		• With emergency cock (BP < 4.75 Kg/cm ²).	1
8.	Check traction interlock	Switch of the brake electronics. The	9 200 100
		Tractive /Braking effort should ramp down, VCB	(cheered on
		should open and BP reduces rapidly.	9
9.	Check regenerative	Bring the TE/BE throttle to BE side. Loco speed	Echemen
	braking.	should start reducing.	JOR
10.	Check for BUR	In the event of failure of one BUR, rest of the two	9
	redundancy test at	BURs can take the load of all the auxiliaries. For this	1 of a second
	ventilation level 1 & 3 of	switch off one BUR.	cherron
	loco operation	Auxiliaries should be catered by rest of two BURs.	
	de la	Switch off the 2 BURs; loco should trip in this case.	J
11.	Check the power	Create disturbance in power converter by switching	9
	converter	off the electronics. VCB should open and converter	(exerced
	isolation test	should get isolated and traction is possible with	(ex
		another power converter.	

18

DIESEL LOCO MODERNISATION WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 41536

Type of Locomotive: WAP-7/WAG-9HC

Page: 27 of 27

7.0 Final check list to be verified at the time of Loco dispatch

Condition /Operations of the following items are to be checked:

SN	Item	Cab-1	Cab-2	Remarks
1	Head lights	OK	OK	1
2	Marker Red	OK	OK	
3	Marker White	OK	0 K	
4	Cab Lights	OV	OK	
5	Dr Spot Light	OV	on	Check worken
6	Asst Dr Spot Light	OK	OK	
7	Flasher Light	OK	OK	
8	Instrument Lights	OK	OK	
9	Corridor Light	0 K	OK	
10	Cab Fans	OK	OK	
11	Cab Heater/Blowers	or	OK	
12	All Cab Signal Lamps Panel 'A'	OK	0K	

Status of RDSO modifications



LOCO NO: 41536

Sn	Modification No.	Description	Remarks
1.	RDSO/2008/EL/MS/0357 Rev.'0' Dt 20.02.08	Modification in control circuit of Flasher Light and Head Light of three phase electric locomotives.	Ok/Not Ok
2.	RDSO/2009/EL/MS/0377 Rev.'0' Dt 22.04.09	Modification to voltage sensing circuit in electric locomotives.	9k/Not 0k
3.	RDSO/2010/EL/MS/0390 Rev.'0' Dt 31.12.10	Paralleling of interlocks of EP contactors and Relays of three phase locomotives to improve reliability.	Ok/Not Ok
4.	RDSO/2011/EL/MS/0399 Rev.'0' Dt 08.08.11	Removal of interlocks of control circuit contactors no. 126 from MCPA circuit.	OK/Not Ok
5.	RDSO/2011/EL/MS/0400 Rev.'0' Dt 10.08.11	Modification sheet for shifting the termination of \$GKW, 1.8 KV, 70 sq mm cables and 2x2.5 sq mm cables housed in lower portion of HB2 panel and provision of Synthetic resin bonded glass fiber sheet for three phase locomotives.	,QK/Not Ok
6.	RDSO/2011/EL/MS/0401 Rev.'0' Dt 10.08.11	Modification sheet for relaying of cables in HB-2 panel of three phase locomotives to avoid fire hazards.	Øk/Not Ok
7.	RDSO/2011/EL/MS/0403 Rev.'0' Dt 30.11.11	Auto switching of machine room/corridor lights to avoid draining of batteries in three phase electric locomotives.	Ok/Not Ok
8.	RDSO/2012/EL/MS/0408 Rev.'0'	Modification of terminal connection of heater cum blower assembly.	Øk/Not Ok
9.	RDSO/2012/EL/MS/0411 Rev.'1' dated 02.11.12	Modification sheet to avoid simultaneous switching ON of White and Red marker light in three phase electric locomotives.	Øk/Not Ok
10	RDSO/2012/EL/MS/0413 Rev.'1' Dt 25.04.16	Paralleling of interlocks of EP contactors and auxiliary contactors of three phase locomotives to improve reliability.	Øk/Not Ok
11	RDSO/2012/EL/MS/0419 Rev.'0' Dt 20.12.12	Modification sheet to provide rubber sealing gasket in Master Controller of three phase locomotives.	Øk/Not Ok
12	RDSO/2013/EL/MS/0420 Rev.'0' Dt 23.01.13	Modification sheet to provide mechanical locking arrangement in Primary Over Current Relay of three phase locomotives.	Ok/Not Ok
13	RDSO/2013/EL/MS/0425 Rev.'0' Dt 22.05.13	Modification sheet for improving illumination of head light in dimmer mode in three phase electric locomotives.	OK/Not Ok
14	RDSO/2013/EL/MS/0426 Rev.'0' Dt 18.07.13	Modification sheet of Bogie isolation rotary switch in three phase electric locomotives.	OK/Not Ok
15	RDSO/2013/EL/MS/0427 Rev.'0' Dt 23.10.13	Modification sheet for MCP control in three phase electric locomotives.	9k/Not 0k
16	RDSO/2013/EL/MS/0428 Rev.'0' Dt 10.12.13	Modification sheet for relocation of earth fault relays for harmonic filter and hotel load along with its resistors in three phase electric locomotives.	Øk/Not Ok
17	RDSO/2014/EL/MS/0432 Rev.'0' Dt 12.03.14	Removal of shorting link provided at c-d terminal of over current relay of three phase electric locomotives.	Ok/Not Ok
18	RDSO/2017/EL/MS/0464 Rev.'0' Dt 25.09.17	Provision of Auxiliary interlock for monitoring of Harmonic filter ON (8.1)/adoption (8.2) Contactor in GTO/IGBT locomotives.	Øk/Not Ok
19	RDSO/2017/EL/MS/0467 Rev.'0' Dt 07.12.17	Modification in blocking diodes to improve reliability in three phase electric locomotives.	6k/Not 0k
20	RDSO/2018/EL/MS/0475 Rev.'0'	Modification in existing Control Electronics (CE) resetting scheme of 3 phase electric locomotives.	6k/Not 0k
21	RDSO/2019/EL/MS/0477 Rev.'0' Dt 18.09.19	Implementation of push pull scheme.	∕Ók/Not Ok

Signature of JE/SSE/TRS



Page 1 of 4

DMW/PATIALA

Loco No.: 41536

PNEUMATIC TEST PARAMETERS OF 3-PHASE ELECTRIC LOCOMOTIVES

(As per DG/RDSO/LKO's letter No.-EL/3.2.19/3phase, dated-29.03.2012)

S.N	Parameters	Reference	Value	Result
1.0	Auxillary Air supply system (Pantograph & VCB)			
1.1	Ensure, Air is completely vented from pantograph		0	0
	Reservoir (Ensure Panto gauge reading is Zero)			
1.2	Turn On BL Key. Now MCPA starts.		60 sec. (Max.)	57 Sec
	Record pressure Build up time (8.5kg/cm2)			
1.3	Auxillary compressor safety Valve 23F setting	Faiveley Doc. No. DMTS-014-1, 8 CLW's check sheet no. F60.812 Version 2	8.5±0.25kg/cm2 -	8.5 Kg/cm2
1.4	Check VCB Pressure Switch Setting	CLW's check sheet no. F60.812 Version 2	Opens 4.5±0.15 kg/cm2 closes 5.5±0.15 kg/cm2	4.5 Kg /cm2
1.5	Set pantograph Selector Switch is in Auto, Open pan-1&2 Iso	olating Cocks & KABA co	ock by Key (KABA Key)	
1.6	Set Cab-1 Pan UP in Panel A.		Observed Pan-2 Rises.	ОК
1.7	Close Pan-2 isolating Cock		Panto-2 Fails Down	ОК
	Open Pan -2 isolating Cock	100	Panto-2 Rises	
1.8			06 to 10 seconds	8 Sec
1.9	Record Pantograph Lowering Time		06 to 10 seconds	
1.10	Panto line air leakage		0.7 kg/cm2 in 5	0.3 kg/cm2
			Min.	in 5 Min.
2.0	Main Air Supply System			
2.1	Ensure, Air is completely vented from locomotive. Drain out all the reservoirs by opening the drain cocks and then closed drain cocks. MR air pressure build up time by each compressor from 0 to 10 kg/cm2.	Theoretical calculation and test performed by Railways.		
	i) with 1750 LPM compressor ii) with 1450 LPM compressor		i) 7 Mts. Max. ii) 8.5 Mts. Max.	6.8 Mts
2.2	Drain air below MR 8 kg/cm2 to start both the compressors		Check Starting of both compressors	
2.3	Drain air from main reservoir up to 7 kg/cm2. Start compressors, Check pressure build time of individual compressor from 8 kg/cm2 to 9 kg/cm2		30 Sec. (Max)	CP1-27 Sec CP2-27 Sec
2.4	Check Low MR Pressure Switch Setting (37)	D&M test spec. MM3882 & MM3946	Closes at 6.40±0.15 kg/cm2 Opens at 5.60±0.15kg/cm2	6.5 Kg/cm2 5.5 Kg/cm2
2.5	Check compressor Pressure Switch RGCP setting (35)	D&M test spec. MM3882 &	Closes at 10±0.20 kg/cm2 Opens at	10.0 Kg/cm2
		MM3946	8±0.20 kg/cm2	8.0 Kg/cm2



DMW/PATIALA

Page 2 of 4 Loco No.:41536

2.7		valve operation time				Approx. 12 Sec.	10 sec
2.8	Check Auto Dra	in Valve functioning (124 & 87)		Operates when Compressor starts			
2.9	Direct by BLCP.	ery safety valve settin		D&M test spec. MM3882 & MM3946		11.50±0.35kg/cm2	11.5 Kg/cm
2.10	direct by BLCP	very safety valve settii		D&M test spec. MM3882 & MM3946		11.50±0.35kg/cm2	11.5 Kg/cm
2.11		compressors and ens pressure 12 kg/cm2 l		D&M test spec. MM3882 & MM3946			
2.12	by drain cock of	ritch 'OFF' compressor f 1" Main Reservoir, St essure of Duplex Chec	art Compressor,	no. F60.81	ck sheet 2 Version 2	5.0+0.10kg/cm2	5.0 Kg/cm ²
2.13	The state of the s	n Test point 107F FPTI	P. Open isolate cock	CLW's check sheet no. F60.812 Version 2		6.0±0.20kg/cm2	6.0 Kg/cm2
3.0	Air Dryer Ope						
3.1	Open Drain Coc	k 90 <i>o</i> f 2 nd MR to start neck Air Dryer Towers				Tower to change i) Every minute (FTIL & SIL) ii)every two minute (KBIL)	ок
3.2	Check Purge Air Stops from Air Dryer at Compressor stops						
3.3	Check condition			Blue	Blue		
4.0	Main Reservoir				- William Wall		Y
4.1	Put Auto Brake leakage from bo	(A-9) in full service, Choth cabs.	neck MR Pressure air	D&M test spec. MM3882 & MM3946		Should be less than 1 kg/cm2 in 15 minutes	0.4 Kg/cm2 in 15 minutes
4.2	Check BP Air lea	akage (isolate BP charg	ging cock-70)	D&M test spec. MM3882 & MM3946		0.15 kg/cm2 in 5 minutes	0.05 Kg/cm2 in 5 minutes
5.0	Brake Test (A	utomatic Brake ope	ration)	1			
5.1		ipe & Brake Cylinder p		The state of the s			
	Check proportionality of Auto Brake system			1	eck sheet 2 Version 2		
	Auto controller position			BC (WAG-S Kg/cm2	2 & WAG-7)	BC (WAP-5) Kg/cm2	
		BP Pressure kg/cr	m2	Value	Result	Value	Result
	Run	5±0.1	5.0 Kg/cm2	0.00	0.00 Kg/ cm2	0.00	
	Initial	4.60±0.1	4.5 Kg/cm2	0.40±0.1	0.40Kg/ cm2	0.75±0.15	
	Full service	3.35±0.2	3.5 Kg/cm2	2.50±0.1	2.5Kg/ cm2	5.15±0.30	
		reaction Plantagement and a reaction of the second and a second and					1



Page 3 of 4

Loco No.:41536

			mara a	VO.:41536
5.2	Record time to BP pressure drop to 3.5 kg/cm2 Ensure	D&M test spec.	8±2 sec.	9 Sec
	Automatic Brake Controller handle is Full Service from Run	MM3882 & MM3946		
5.3	Operate Asst. Driver Emergency Cock,	D&M test spec.	BP pressure falls	
		MM3882 & MM3946	to Below 25 kg/cm2	OK
5.4	Check brake Pipe Pressure Switch 69F operates	CLW's check sheet no.	Closes at BP	4.2 Kg/cm2
		F60.812 Version 2	4.05-4.35	
			kg/cm2	
			Opens at BP	2.9 Kg/cm2
		18	2.85-3,15	
			kg/cm2	
5.5	Move Auto Brake Controller handle from Running to	D&M test spec.		
	Emergency BC filling time from 0.4 kg/cm2 i.e. 95% of	MM3882 & MM3946	=	
	Max. BC developed			
	WAP5 – BC 5.15 ± 0.3 kg/cm2 apply time		4±1 sec.	
	WAP7 - BC 2.50 ± 0.1 kg/cm2		7.5±1.5 sec.	
-	WAG9 - BC 2.50 ± 0.1 kg/cm2		21±3 sec.	23 Sec
5.6	Move Auto Brake Controller handle to full service and	D&M test spec.		
	BP pressure 3.5 kg/cm2. Move Brake controller to	MM3882 & MM3946		
	Running position BC Release time to fall BC Pressure			
	up to 0.4 kg/cm2 i.e. 95% of Max. BC developed			
	BC release Time			
	WAG9 / WAP7 WAP5 VA G-9		17.5±25 sec.	
F 3	,		52±7.5 sec.	46 Sec
5.7	Move Auto Brake Controller handle to Release, Check	CLW's check sheet no.	60 to 80 Sec.	75 Sec
5.8	BP Pressure Steady at 5.5 0.2 kg/cm2 time.	F60.812 Version 2		
5,6	Auto Brake capacity test : The capacity of the A9 valve	RDSO Motive power	BP pressure	
	in released condition must conform to certain limit in	Directorate report no.	should not fall	
	order to ensure compensation for air leakage in the	MP Guide No. 11 July,	below 4.0	80
	train without interfering with the automatic functioning of brake.	1999 Rev.1	kg/cm2 with in	4.2 Kg/cm2
			60 Sec.	
	* Allow The MR pressure to build up to maximum stipulated limit.			
	* Close brake pipe angle cock and charge brake pipe to			
	5 kg/cm2 by A (Automatic brake controlling) at run		8	
	position.			
	* Couple 7.5 dia leak hole to the brake hose pipe of			
	locomotive. Open the angle cock for brake pipe.			
	The test shall be carried out with all the compressors			
	in working condition.			
5.9	Keep Auto Brake Controller (A-9) in Full Service. Press		BC comes to '0'	
	Driver End paddle Switch (PVEF)		BC Comes to 0	0
5.0	Direct Brake (SA-9)			
5.1	Apply Direct Brake in Full Check BC pressure		T T	
	WAG9/WAP7	CLW's check sheet no.	3.5±0.20 kg/cm2	3.5Kg/cm2
	WAP5	F60.812 Version 2	5.15±0.3 kg/cm2	JUNE CHIZ
5.2	Apply Direct Brake, Record Brake Cylinder charging	D&IVI test spec.	8 sec. (Max.)	6 Sec
	time	MM3882 & MM3946	(

Page 4 of 4

DMW/PATIALA

Loco No.:41536

6.3	Check Direct Brake Pressure switch 59 (F)	D&M test spec. MM3882 & MM3946	0.2.±0.1 kg/cm2	0.1 kg/cm2
6.4	Release direct brake & BC Release time to fall BC pressure up to 0.4 kg/cm2		10 -15 Sec.	10 Sec
7.0	Sanding Equipment	1		_i
7.1	Check Isolating Cock-134F is in open position. Press sander paddle Switch. (To confirm EP valves Operates)	The state of the s	Sand on Rail	ОК
8.0	Test Vigilance equipment : As per D&M test specification			ОК

Signature of Loco testing staff

Signature of SSE/Shop



Issue No.: 03

Effective Date: April-2021

DOC NO: F/LAS/Electric Loco CHECK SHEET (Ref: WI/LAS/Elect/01, 02, 03 & 04 & QPL/LAS/Elect. Loco) Page 1 of 1

डीजल रेळइंजन आधुनिकीकरण कारखाना पटियाला। DIESEL LOCO MODERNISATION WORKS, PATIALA

ELECTRIC LOCO CHECK SHEET

LOCO NO: 4/536

Rly: SWR

Shed: KJM

S. No.	ITEM TO BE CHECKED	Specified Value	Ob	served V	alue
1.1	Check proper Fitment of Hotel Load Converter & its output contactor.	ОК	R	,	
1.2	Check proper Fitment of MR Blower 1 & 2, MR Scavenging Blower 1 & 2, TM Blower 1 & 2.	ОК	3 K	2	
1.3	Check proper of Fitment of oil cooling unit (OCU).	ОК	00	9	
1.4	Check proper Fitment of HB 1 & 2 and its respected lower part on its	OK	0	r	
1.5	Check proper Fitment of FB panel on its position.	OK	01		
1.6	Check proper Fitment of assembled SB1 & SB2 with VCU1 & VCU2.	OK	GX		
1.7	Check proper Fitment of Auxiliary converter 1, 2 & 3-(BUR-1, 2 & 3).	OK	61	-	
1.8	Check proper Fitment of Traction converter 1 & 2 (SR-1 & 2).	OK	OR	<u> </u>	
1.10	Check proper fitment, torquing & Locking of Main transformer bolt.	OK	Ot	-	
1.12	Check proper fitment of compressor both side with the compressor safety wire rope.	OK	0	r	
1.13	Proper setting of the dampers as required.	OK	0	K	
1.14	Check proper position of Secondary Helical Springs between Bogie &	ОК	G		
1.15	Check proper fitment of Body Bogie Safety Chains fitted properly.	OK	0	ex?	
1.16	Check proper fitment of Cow catcher.	ОК	0		
1.17	Check coolant level in SR 1 & 2 Expansion Tank	ОК	0		-
1.18	Check Transformer Oil Level in both conservators Tank (Breather	ОК	B		
1.19	Cattle Guard Height (150 mm) Drg No IB061-00160.	150 mm	19	10 mm	
1.20	Check proper fitment of both battery box.	ОК	6	And the second second	
1.21	Check proper fitment of Push Pull rod its bolt torquing and safety slings.	ОК	6	00	
1.22	Buffer height: Range (1085 mm to 1105 mm) Drg No IB031-02002.	1085-1105 mm		L/S	R/S
			FRONT	1095	1099
			REAR	1.098	1105
1.23	Buffer Length: Range (633.5 mm to 637 Mm) Drg No-SK.DL-4748.	633.5 - 637 mm		L/S	R/S
			FRONT	635	634
			REAR	635	635
1.25	Height of Rail Guard. (114 mm + 5 mm,-12 mm).	114 mm + 5		L/S	R/S
		mm,-12 mm	FRONT	109	109
			REAR	113	119
1.26	CBC Height: Range (1085 mm to 1105 mm) Drg No- IB031-02002	1085-1105 mm	FRONT:	1092	
	\sim		REAR:	1095	

(Signature of SSE/Elect. Loco)

NAME BHUPINDE & SINCH

DATE 23/09/21

(Signature of JE/Elect Loco)

Sayly /cuner (Signature of JE/UF)

		DIESEL LOCO MODERNISATION LOCO NO -:41536		, AIMLA	
	***************************************	Under frame compon	ent		
5. N. Dissertion of component	PL No	Make		Mfg. date & Serial no.	Warr
	291710	64 SELVOC ENGG. CO.P.LTD.			cove
2 Men Transformer	202240			03/33 ,08/21	Jan.
3 Conservator Tank BREATHER	297310			ABB-65-07-21-2XYT000000-ABY022,2021	**************************************
1 Kennyassar both side	2951100			21-0609 & 21-0641	***************************************
5 Partiety Box both side	2968001	Bhartía bright & Seamless stea		EUDS926532(07/21) ,EUAS92620205/21)	
on Bar Cab I	2910006	9 TEW	CI CIU	4021/30 (07/21) ,4621/23(07/21)	5
* Mathon Bar Cab-2	2910006	9 TEW		2853-4-21	Condition
8 June Bullet Assly Both Side	1180358			2847-04-21	— §
9 Pump both Side	2953002		L	P04-21-561,04-21-571,Lp04-21-533,04-21-549	0
to Transformer oil Steel pipes	2923004		LTD.)2447 & D2450	As per PO
PRESENTATION OF LEGISLATION OF THE PROPERTY OF		RIL			be be
12 Secondary Holical Spring on Bo	gie 29045032	FRONTIER	0	2/21 ,01-21	As
Center pivot Ri		AWADH			
4 JEANNE Pivot Housing	29100057	AEW			W-0000000
I Protectional Contactor		Machine room Com-		37-04-21 ,336-04-21	
Load Converter	29741087	700000	ab 1		
M. Hover	29741087	WY 614 VO		1904-09	
trenging Blower Motor	29440075	AIR CONTROL & CHEMICAL ENG	6 05	· ·	-
Cubical (HB-1)		DANIAL HARAND		/21 AC-45480,CGLUEAM-0086, IMP-2248	
Cubical (FB-1)	29171180	TROLEX INDIA PVT.LTD,	112	/2U_CF30/D4992	
Semplete Control Cubicle S8-1	73480140	AUTOMETER ALIJANCE	07	/21 & 21470	5
Frank Control Unit (VCU)	291/1209	C.G.L	- 10/	/21 & AALN/07/2021/05/FB/014	PO condition
aber Converter (BUR) 1	29741075	BOMBARDIER	DT	CG/SB1/21060238	5
Eligended num (OCO)	29741075	BOMBARDIER	BII	IL/08/2021/30/PROPULSION_A/1745	7 6
PERI RADIATOR	29470043	SAINI ELECTICALS	06/	/21 & 2021H/10202/4A/0016	ď
Mar Proons Blower	29470031	APPOLO	00/	21 & 321061764 & FAN-3210 6 AF1764	→ bei
The Brown Scavenging Blower	29440105	AIR CONTROL & CHEMICAL ENGG		21 & FG415002/M-1/21-22/264	As
Usefaux Convertor	1 27410173	AIR CONTROL & CHEMICAL ENGO	The state of the s	21 AC-41819,CGLUBAM-14923,IMP-705	
Histal Land convertor I.V. Coupler	1 57771073	BOMBARDIER	THE PERSON NAMED IN COLUMN TWO IS NOT THE OWNER, THE OW	21 & AC-46524, CGLUDAM-16446 IMP-81	
	29741087		OTIL	-/08/2021/20/PROPULSION_A/1726	
high Lond Contactor	29741087	MACHINE ROOM COMPONENT	Cab-2		
Converter Converter	29741087	West Assert		**************************************	
TAT Brower		NI COLUMN			
A severeing Blower Motor	29440117	AIR CONTROL & CHEMICAL ENGG. AMAL HARAND		1 AC-45459, CGLUDBM-4977IMP-2264	
Control Cubical HB-2	29171192	UTOMETER ALILANCE	12/2/	U & CF30/D5019	
Control Cubicle 58-2	29171210 T	ROLEX INDIA PVT.LTD.	07/2	1 & AALN/07/2021/11/HB2G9/060	fior
- clause Control Unit (VCU)	29741075 B	OMBARDIER	101/2	1 @ 21833	per PO condition
Unverter (BUR) 2&3	29741075 B	OMBARDIER.	BTIL/	08/2021/30/PROPULSION A/1746	Š
M. Laoung Unit (OCU)	29470043 S	AINI ELECTICALS	100/2	1 & 2021H/10202/3R/001c	S
14 Koon blower	29470031 A	PPOLO	06/21	& 321061777 & FAN-321060F1777	< 10 m
The English Scav. blower	29440105 A	R CONTROL & CHEMICAL ENGG	07/2	L & FG415002/M-1/21-22/262	be s
7 Prints Convertor	- 10127 A	K CONTROL & CHEMICAL ENGO	100/21	Q AC-41820, CGLURAM-1/1027	As
inschland kanvertor LV. Coupler	DI CLASSIC	OMBARDIER	RTH /	& AC-46529, CGLUDAM-16449 IMP-81	**************************************
	29741087	A 50 0 0 0 0	2111/3	08/2021/22/PROPULSION A/1729	***************************************
ti el Brike	291annen Ira	Driver Cabin			
- Canditioner	29811028 INT	echwell modified hand brake com fit. EC CORPORATION	12305		
The Health	29170011 TO	P GRIP	03/21	& 21C769, 21C739	0 =
A A	29470080 VE	NTWFII	341, 3	42	As per PO condition
Seri Addis		RUDEEP		6-272, 190, 212, 249	and Dir
'ठमपर			18, 25,	. 05, 09	As
BHUPINDER SING				SIGN	
A latta	LI.			NAME SATISH KUMAR JE/LAS	

DMW/PTA

ELECTRIC LOCO HISTORY SHEET (TRS)

RLY: SWR

SHED: KJM

PROPULSION SYSTEM: BT

LIST OF ITEMS FITTED BY TRS ELECTRIC LOCO NO: 41536

WARRANTY	COVERED							AS PER IRS / P.O	CONDITIONS	ē		25 17			
QPL		04 Nos.	02 Set	04 Set	04 Nos.	02 Set	04 Nos.	02 Nos.	02 Set	02 Nos.	02 Nos.	02 Nos.	01 Set	01 Set	01 Set
MAKE/SUPPLIER		M/s PCE	M/s MATSUSHI POWER	M/s POWER TECH	M/s EIC	M/s TOP GRIP	M/s. VENTWELL	M/s AUTOMETER	M/s. KEPCO	M/s. CROMPTON	M/s PATRA & CHANDA	Ms. TROLEX	M/s AUTOMETER	AMCO	PPS DMW
ITEM SR. NO.	CAB-2	6/2021	22831	4484,4479	2640,2533	342	210206174,210206359	AALN/05/2021/006/ MCT/066	KEPCO/A1/1757	CG/CF/21070839	PCE/921/3/2021	7663	MTELM2106125	. No 237 maintenance kit)	MMM
ITEM	CAB-1	6/2021	22853	4478,4589	2513,2567	341	210202181,210206371	AALN/05/2021/002/ MCT/062	KEPCO/A1/1843	CG/CF/21070845	PCE/990/3/2021	7532	MTELS2106125	Battery Set No 237 (Along with Battery maintenance kit)	PPS DMW
ITEM PL	ON	29610023	25984962	25984860	29610461	29170011	29470080	29860015	29178204	29178162	29700012	29500059	29200040	29680025	29600418
DESCRIPTION OF ITEM		HEAD LIGHT LAMP	LED BASED FL LIGHT	LED MARKER LIGHT	DRIVER CAB LIGHT	CAB HEATER	CREW FAN	MASTER CONTROLLER	COMPLETE PANEL A,C,D	COMPLETE CUBICLE- F PANEL	HEATER ROTERY SWITCH	DIFFRENCIAL AMPLIFIRE	SPEED IND. & REC. SYSTEM	BATTERY (Ni- Cd)	HARNESSED CABLE COMPLETE
NS	3 3		2	m	4	2	O	2	∞	o	10	-	12	13	4





		BOOF COMPONENT CAB 1 0 2		
-		SOUP COMPONENT CAB 1 & 2		Warranty
Ø	QPL /Nos.	Supplier	Sr. no.	
	2	Contransys Private Ltd. Kolkata	10357-07/21,10366-07/21	
	2	Contransys Private Ltd. Kolkata	10079-07/21,10343-07/21	
	2	VIKRANT		
	8	BHEL	08/20,08/20	
		MIDDLE ROOF COMPONENT		
	1	EIPL	21/05/2342	
	1	RITZ	2020/51460468	
	1 /	AUTOMETER ALIANCE	VCBA 2105085	
	9	BHEL	12/19,12/19	
	1	RSI Switchgear	448149/9-03/2021	
	1	Patra and Chanda	PCE-69/7/21	As per IRS/PO conditions
	2 4	ABB	HA13032729,HA13032735	
		Air Brake Components		
	2 E	Elgi	EUAS 926202A &EUAS 926532B	
	1	TRIDENT	LD2-02-5970-21	
	1 0	CEC	RC424-3-21	
	1 F	FAIVELY	JUNE -21-27-WAG9-1582	
	2 F	FAIVELY	F 21-004A, F 21-005B	
	2 F	FAIVELY		T
	4 E	Elgi		T





DIESEL LOCO MODERNISATION WORKS



Loco No. 41536

1. BOGIE FRAME:

BOGIE	FRAME NO	Make	PL No.	PO No. & dt.	Warranty Period
FRONT	SL-480	ANUP	20405440	101276	As per PO/IRS
REAR	SL-479	ANUP	29105146	101276	conditions

2. Hydraulic Dampers (Axle, Vertical, Yaw and Horizontal) Make: ESCORT

3. AXLES:

AXLE POSITION NO	1	2	3	4	5	6
MAKE/	DMW	DMW	DMW	DMW	DMW	DMW
S.NO	21139	21154	21556	21513	21689	21530
Ultrasonic Testing	OK	OK	OK	OK	OK	OK

4. WHEEL DISCS NO. AND TYPE

AXLE POSITION NO	1	2	3	4	5	6
GEAR END	CNC/21- 1087	CNC/21- 1079	DM/21- 1075	CNC/21- 1090	CNC/21- 1098	CNC/21- 1080
Ultrasonic Testing	OK	OK	OK	OK	OK	OK
FREE END	CNC/21- 1088	CNC/21- 1081	CNC/21- 1073	CNC/21- 1094	DM/21- 1096	CNC/21- 1082
Ultrasonic Testing	OK	OK	OK	OK	OK	OK

5. AXLE ROLLER BEARING (CRU) (PL No. 29010020, Warranty: As per PO/IRS conditions)

Д	XLE POSITION NO	1	2	3	4	5	6
Gear	MAKE	NBC	NBC	SKF	NBC	NBC	NBC
End	PO NO. & dt	771567	771567	771678	771567	771567	771567
Free	MAKE	NBC	NBC	SKF	NBC	NBC	NBC
End	PO NO. & dt	771567	771567	771678	771567	771567	771567

6. WHEEL DISC PRESSING (PRESSURE IN KN): SPECIFIED 80-105 T

AXLE POSITION NO	1	2	3	4	5	6
BULL GEAR END	839	936	843	933	850	973
FREE END	866	961	836	963	892	959



Loco No. 41536

7. DIAMETER AFTER PROFILE TURNING: SPECIFIED 1092 + 5 mm - 0 mm

AXLE POSITION NO	1	2	3	4	5	6
DIA IN mm GE	1093	1093	1093	1093	1093	1093
DIA IN mm FE	1093	1093	1093	1093	1093	1093
WHEEL PROFILE GAUGE (1596±0.5mm)	OK	OK	OK	OK	OK	ОК

8. SUSPENSION TUBE & ITS TAPER ROLLER BEARING:

AXLE POSITION	NO	1	2	3	4	5	6
S.T.	MAKE	KPE	KPE	KPE	KPE	KPE	KPE
G.E. BEARING	MAKE	SKF	SKF	FAG	SKF	SKF	SKF
F.E. BEARING	MAKE	SKF	SKF	FAG	SKF	SKF	SKF

9. GEAR CASE & BACKLASH:

AXLE POSITION NO	1	2	3	4	5	6
MAKE	KM	KM	KM	KM	KM	KM
BACKLASH (0.254 – 0.458mm)	0.320	0.310	0.300	0.310	0.320	0.320

10 A/BOX TO BOGIE FRAME LATERAL CLEARANCES (SPECIFIED 15.0 to 19.0mm):

AXLE POSITION NO	1	2	3	4	5	6
RIGHT SIDE	18.49	16.00	16.99	15.90	18.19	16.00
LEFT SIDE	16.70	18.00	17.83	16.50	16.50	17.00

11. TRACTION MOTOR: (PL No. 29942007, Warranty: As per PO/IRS conditions)

AXLE POSITION NO	MAKE	PO No. & date	S. NO.
1	CGP	566629 dt 19.01.19	2192001-2768
2	CGP	566629 dt 19.01.19	2192001-2762
3	CGP	566629 dt 19.01.19	2192001-2766
4	CGP	566629 dt 19.01.19	2192001-2825
5	CGP	566629 dt 19.01.19	2192001-2765
6	CGP	566629 dt 19.01.19	2192001-2767

SSE/ Bogie Shop



	TOP 12 (COSTLIEST ITEMS OF WAG9HC LOCO WITH	TOP 12 COSTLIEST ITEMS OF WAG9HC LOCO WITH WARRANTY CONDITIONS AS PER TENDERS
S No	PL No	DESCRIPTION	Warranty Period
Н	29741075	IGBT BASED 3-PHASE DRIVE PROPULSION EQUIPMENT	60 months after commissioning or 72 months from date of supply whichever earlier as per special conditions given by CLW
7	29731057	MAIN TRANSFORMER 7775 KVA TYPE LOT 7500 FOR WAP7 3- PHASE ELECTRIC LOCOMOTIVE TO CLW SPECN NO.CLW/ES/3/0660/C	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
m	29171064	COMPLETE SHELL ASSLY (PIPED & PAINTED) FOR WAP-7 LOCO TO CLW SPEC. NO. CLW/MS/3/152 ALT-8	COMPLETE SHELL ASSLY (PIPED & PAINTED) FOR AS PER IRS CONDITIONS-30 MONTHS FROM THE DATE OF WAP-7 LOCO TO CLW SPEC. NO. CLW/MS/3/152 ALT-SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER.
4	29600418	SET OF HARNESSED CABLE FOR 3-PHASE ELECTRIC LOCOMOTIVES TO CLW SPECN. NO. CLW/ES/03/646 ALT-NIL WITH DMW REQUIREMENT OF HARNESSED CABLE FOR WAP-7, ALT-A1 DATED 27/11/2018.	As per clause no.9 of CLW Specn. CLW/ES/3/0458 & Clause No.10 of CLW SpecnCLW/ES/3/0459. [18 months after commissioning or 20 months from date of supply for single core & 18 months after commissioning or 24 months from date of supply for multi core]

1
/

-			
ις	29180016	BRAKE CONTROL SYSTEM INCLUDING DRIVER'S VIGILANCE CONTROL DEVICE TO SET LIST NO.EL29180016.	As per specification no. CLW/MS/3/001 Alt. 16 i.e. the manufacturer is required to guarantee that the brakevalves/equipment work satisfactorily for a period of five (5) years after commissioning. Any equipment/part which failsduring the guarantee period shall be replaced free of cost by the manufacturer. The replaced components shallfurther be under warranty for five (5) years from the date of their fitment and should the replaced components proveunsatisfactory in service, they shall be replaced by modified and improved components by the supplier free of cost.
9	29480140	COMPLETE FILTER CUBICLE ALONG WITH ALL EQUIPMENTS AND CABLING TO DRG./SPEC NO. [1] CLW/ES/3/0193 ALT-F OR LATEST AND CLW DRG. NO. 1209-15-143-004 ALT-10 AND PART DRG./SPEC NO AS PER ANNEXURE-A ATTACHED.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
7	29942007	3-PHASE ASYNCHRONOUS TRACTION MOTOR (RESISTANCE RING MECHANICALLY INTERLOCKED TO END PLATE DESIGN ROTOR, SCHEME-II), TYPE 6FRA-6068 FOR WAP-7 ELECTRIC LOCO WITHOUT ACTIVE SPEED SENSOR TO SPECIFICATION NO. 4TMS.096.081 ALT-2 AND STR NO. CLW/2008/3PHTM/STR/0001.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
	A TOTAL OF THE PROPERTY OF THE		

	A
	(11)
	W)

As per clause 16 of Spec.No.CLW/MS/3/Bogie/003 Alt-1. [60 months after commissioning or 72 months from date of supply]	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
Bogie Frame Complete for WAP-7 for 3 Phase Co Co Locomotive to CLW specification No. CLW/MS/3/Bogie/003 alt-1 and CLW Drg.No.1209.01.112-202 Alt-Nil	COMPLETE AUXILIARY CUBICLE HB2 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0192 ALT-E OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	COMPLETE CONTROL CUBICLE SB2 ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0195/A ALT-H OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	COMPLETE CONTROL CUBICLE SB1 (PUSH PULL SCHEME COMPLIANT) ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0194 ALT-G OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	COMPLETE AUXILIARY CUBICLE HB1 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0191 ALT-D OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.
29105146	29171192	29171210	29171209	29171180
∞	o	10	11	12