

भारतीय रेल Indian Railways

पटियाला रेलइंजन कारख़ाना, पटियाला Patiala Locomotive Works, Patiala



LOCO TESTING & DISPATCH REPORT OF IGBT BASED 3 PHASE ELECTRIC LOCOMOTIVE

LOCO NO.: 39471

TYPE: WAP-7

RAILWAY SHED: NR/GZBE

PROPULSION SYSTEM: ALSTOM

HOTEL LOAD: MEDHA

DATE OF DISPATCH: 30.03.2025

लोको निर्माण रिकार्ड



पटियाला रेलइंजिन कारख़ाना, पटियाला Patiala Locomotive Works, Patiala

LOCO NO. - 39471

RAILWAY/SHED: NR/GZBE

DOD: March-2025

INDEX

SN	PARA	ACTIVITIES	PAGE NO.			
	Testing & Commissioning (ECS)					
1.	1.0	Continuity Test of the cables				
	1.1	Continuity Test of Traction Circuit Cables				
	1.2	Continuity Test of Auxiliary Circuit Cables	1-4			
	1.3	Continuity Test of Battery Circuit Cables				
	1.4	Continuity Test of Screened Control Circuit Cables				
2.	2.0	Low Tension test				
	2.1	Measurement of resistor in OHMS (Ω)	5-6			
	2.2	Check Points				
	2.3	Low Tension Test Battery Circuits (without control electronics)				
3	3.0	Downloading of Software				
	3.1	Check Points				
	3.2	Download Software	7-10			
	3.3	Analogue Signal Checking				
	3.4	Functional test in simulation mode				
4	4.0	Sensor test & convertor test				
	4.1	Test wiring Transformer Circuits – Polarity Test				
	4.2	Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)				
	4.3	Primary Voltage Transformer				
	4.4	Minimum voltage relay (Pos. 86)	44.40			
	4.5	Maximum current relay (Pos. 78)	11-16			
	4.6	Test current sensors				
	4.7	Test DC Link Voltage Sensors (Pos 15.6/*)				
	4.8	Verification of Converter Protection Circuits (Hardware limits)				
	4.9	Sequence of BUR contactors				
5.	5.0	Commissioning with High Voltage				
	5.1	Check List				
	5.2	Safety test main circuit breaker				
	5.3	Auxiliary Converter Commissioning				
	5.3.1	Running test of 3 ph. auxiliary equipments				
	5.3.2	Performance of Auxiliary Converters				
	5.3.3	Performance of BURs when one BUR goes out	16-25			
	5.4	Auxiliary circuit 415/110				
	5.5	Hotel Load Circuit				
	5.6	Traction Converter Commissioning				
	5.7	Test protective shutdown SR				
	5.8 5.0	Test Harmonic Filter				
6	5.9	Test important components of the locomotive	25.26			
6. 7.	6.0 7.0	Running Trial of the locomotive Final Check List to be verified at the time of Loco dispatch	25-26 27			
8.	1-6	Annexure HLC	28-33			
9.	1-6 1-10	Pneumatic Test Parameters	34-37			
9. 10.	1-10	Loco Check Sheet(LAS)	34-37			
11.		Component History (LAS,ECS,ABS)	39-41			
12.	<u> </u>	Component History & Testing Parameter (Bogie Shop)	42-43			
13	<u> </u>	Warranty Conditions as per Tenders	44-46			
, ,		Transity Conditions as por Foliacis				

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 39 47 1 1.0 Continuity Test of the cables Type of Locomotive: WAP-7/WAG-9HC

Page: 1 of 27

1.1 Continuity Test of Traction Circuit Cables

As per cable list given in Para 1.3 of document no. 3 EHX 410 124, check the continuity with continuity tester and megger each cable to be connected between following equipment with 1000V megger.

From	То	Continuity (OK/Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Filter Cubicle	Transformer	ak	100 ΜΩ	950 M2
Filter Cubicle	Terminal Box of Harmonic Filter Resistor (Roof)	oΚ	100 ΜΩ	750m2
Filter Cubicle	Earthing Choke	oK	100 ΜΩ	Booml.
Earthing Choke	Earth Return Brushes	οK	100 ΜΩ	750ma
Transformer	Power Converter 1	øK	100 ΜΩ	850M2 850M2 250M2
Transformer	Power Converter 2	OK	100 ΜΩ	85 one
Power Converter 1	TM1, TM2, TM3	ок	100 ΜΩ	250 MI
Power Converter 2	TM4, TM5, TM6	ok	100 ΜΩ	800Me
Earth	Power Converter 1	oK	100 ΜΩ	700M2
Earth	Power Converter 2	ok	100 ΜΩ	9508R

1.2 Continuity Test of Auxiliary Circuit Cables

As per cable list given in Para 1.4 of document no. 3 EHX 410 124, check the continuity with continuity meter and megger each cable to be connected between following equipment with the help of 1000V megger.

Signature of the JE/SSE/Harness

Signature of the JE/SSE/Loco Cabling

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 2 of 27

From	То	Continuity(OK/ Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Transformer	BUR1	OK	100 ΜΩ	6050191
Transformer	BUR2	Ole	100 ΜΩ	Fooms
Transformer	BUR3	lok	100 ΜΩ	600 MA
Earth	BUR1	8k	100 ΜΩ	800 MA
Earth	BUR2	Ok.	100 ΜΩ	500 1002
Earth	BUR3	OL	100 MΩ	KOO MA
BUR1	HB1	l ou	100 ΜΩ	SOOML
BUR2	HB2	ok	$100~{ m M}\Omega$	600 MA
HB1	HB2	oh	100 ΜΩ	600 m
HB1	TM Blower 1	01 <u></u>	100 ΜΩ	600 m
HB1	TM Scavenge Blower 1	Ole	100 MΩ	FLOD MA
HB1	Oil Cooling Unit 1	A1L	100 ΜΩ	600.001
HB1	Compressor 1	Ole	100 MΩ	اس روات
HB1	TFP Oil Pump 1	OK	100 ΜΩ	Caso WY
HB1	Converter Coolant Pump 1	ou	100 ΜΩ	600 MA
HB1	MR Blower 1	Ole	100 ΜΩ	500 m
HB1	MR Scavenge Blower 1	Ok	100 ΜΩ	500 m/
HB1	Cab1	OK	100 ΜΩ	GOOMA
Cab1	Cab Heater 1	oh	100 ΜΩ	600 ma
HB2	TM Blower 2	ok	100 ΜΩ	700 ML
HB2	TM Scavenge Blower 2	QK-	100 ΜΩ	600 Mr
HB2	Oil Cooling Unit 2	Ok	100 ΜΩ	600 MM
HB2	Compressor 2	े ठा	100 MΩ	CAD MIL
HB2	TFP Oil Pump 2	yk.	100 ΜΩ	600 Mr
HB2	Converter Coolant Pump 2	OR	100 ΜΩ	For m
HB2	MR Blower 2	0k	100 ΜΩ	700 m
HB2	MR Scavenge Blower 2	0/2	100 ΜΩ	Comma
HB2	Cab2	OK	100 ΜΩ	600 Mr
Cab2	Cab Heater 2	ok	100 MΩ	FOO MA

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: *3947*/

Type of Locomotive: WAP-7/WAG-9HC

Page : 3 of 27

1.3 Continuity Test of Battery Circuit Cables

Check continuity of following cables as per Para 2.3 of document no. 3 EHX 610 299

From	То	Condition	Continuity (OK/Not OK)
Battery (wire no 2093)	Circuit breakers 110- 2, 112.1-1, 310.4-1	By opening and closing MCB 112	oK
MCB 110	Connector 50.X7-1	By opening and closing MCB 110	oK
Battery (Wire no. 2052)	Connector 50.X7-2		oK
SB2 (Wire no 2050)	Connector 50.X7-3		οK

Close the MCB 112, 110, 112.1, and 310.4 and	Prescribed value	Measured
measure the resistance of battery wires 2093, 2052, 2050 with respect to the loco earth.	> 0.5 MΩ	Value <i>6</i> MΩ
Measure the resistance between 2093 & 2052, 2093 & 2050, 2052 &	Prescribed value:	Measured
2050	> 50 MΩ	Value <u>60</u> ΜΩ

Commission the indoor lighting of the locomotive as per Sheet No 7A & 7B.

1.4 Continuity Test of Screened Control Circuit Cables

Check the continuity and isolation of the screen cable of the following circuits with the help of sheet no. mentioned against each as per document no. 3 EHX 610 299.

Screened control circuit cables for	Corresponding Sheet Nos.	Continuity & Isolation (OK/Not OK)
Battery voltage measurement	04B	OK
Memotel circuit of cab1 &2	10A	oK.
Memotel speed sensor	10A	oK
Primary voltage detection	01A, 12A	øΚ
Brake controller cab-1 & 2	06F, 06G	oo K

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 4 of 27

	The second secon	
Master controller cab-1 &2	08C, 08D	øK.
TE/BE meter bogie-1 & 2	08E, 08F	oK
Terminal fault indication cab-1 & 2	09F	oK
Brake pipe pressure actual BE electric	06H	oK
Primary current sensors	12B, 12F	oK .
Harmonic filter current sensors	12B, 12F	oK
Auxiliary current sensors	12B, 12F	οK
Oil circuit transformer bogie 1	12E, 12I	oK
Magnetization current	12C, 12G	oK
Traction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-1	12D	оК
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-2	12D	οK
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-3	12D	οK
Traction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-4	12H	oK
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-5	12H	οK
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-6	12H	σK
Train Bus cab 1 & 2 (Wire U13A& U13B to earthing resistance= $10K\Omega \pm 10\%$)	13A	oK
UIC line	13B	oκ
Connection FLG1-Box TB	13A	oK

all.

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u> <u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

2.0 Low Tension test

Page: 5 of 27

2.1 Measurement of resistor in OHMS (Ω)

Measure the resistances of the load resistors for primary voltage transformer, load resistors for primary current transformer and Resistor harmonic filter as per Para 3.2 of the document no. 3 EHX 610 279.

Name of the resistor	Prescribed value	Measured value
Load resistor for primary voltage transformer (Pos. 74.2).	3.9K Ω ± 10%	3.9 K R
Resister to maximum current relay.	1Ω ± 10%	12
Load resistor for primary current transformer (Pos. 6.11).	3.3 Ω ± 10%	3.3n
Resistance harmonic filter (Pos 8.3). Variation allowed \pm 10%	WAP7	WAP7
Between wire 5 & 6	0.2 Ω	0.252
Between wire 6 & 7	0.2 Ω	0.20
Between wire 5 & 7	0.4 Ω	0.452
For train bus, line U13A to earthing.	10 kΩ± 10%	10.0KJL
For train bus, line U13B to earthing.	10 k Ω ± 10%	499 Ksz
Insulation resistance of High Voltage Cable from the top of the roof to the earth (by1000 V megger).	200 ΜΩ	300 M J
Resistance measurement earth return brushes Pos. 10/1.	≤0.3 Ω	0.2952
Resistance measurement earth return brushes Pos. 10/2.	≤0.3 Ω	0.2852
Resistance measurement earth return brushes Pos. 10/3.	≤0.3 Ω	0.2852
Resistance measurement earth return brushes Pos. 10/4.	≤0.3 Ω	0.3052
Earthing resistance (earth fault detection) Harmonic Filter –I; Pos. 8.61.	2.2 kΩ ± 10%	2.2 Ks
Earthing resistance (earth fault detection) Harmonic Filter –II; Pos 8.62.	2.7 k Ω ± 10%	2.7Ks
Earthing resistance (earth fault detection) Aux. Converter; Pos. 90.3.	3.9 k Ω ± 10%	3.9 Kg
Earthing resistance (earth fault detection) 415/110V; Pos. 90.41.	1.8 k Ω ± 10%	1.8 KSL
Earthing resistance (earth fault detection) control circuit; Pos. 90.7.	390 Ω ± 10%	390 52
Earthing resistance (earth fault detection) Hotel load; Pos. 37.1(in case of WAP5).	3.3 k Ω ± 10%	NA
Resistance for headlight dimmer; Pos. 332.3.	10 Ω ± 10%	1052

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Note:

Page: 6 of 27

Make sure that the earthing brush device don't make direct contact with the axle housing,

earth connection must go by brushes.

2.2 Check Points

Items to be checked	Remarks	
Check whether all the earthing connection in roof and machine room as mentioned in sheet no. 22A is done properly or not. These earthing connections must be flexible and should be marked yellow & green	CHECKED OK	
Check whether all the earthing connection between loco body and bogie is done properly or not. These cables must be flexible having correct length and cross section	CHECKED OK	

2.3 Low Tension Test Battery Circuits (without control electronics)

These tests are done with the help of the special type test loop boxes as per procedure given in Para 3.6 of the document no. 3 EHX 610 279

Name of the test	Schematic used.	Remarks
Test 24V supply	Sheet 04F and other linked sheets	CHECKED OK
Test 48V supply	Sheet 04F & sheets of group 09	Fan supply to be checked. $\mathcal{O}K$
Test traction control	Sheets of Group 08.	oK oK
Test power supply bus stations.	Sheets of Group 09.	Fan supply to be checked. <i>∞K</i>
Test control main apparatus	Sheets of Group 05.	σK
Test earth fault detection battery circuit by making artificial earth fault to test the earth fault detection	Sheet 04C	οΚ
Test control Pneumatic devices	Sheets of Group 06	σK
Test lighting control	Sheets of Group 07	øΚ
Pretest speedometer	Sheets of Group 10	øΚ
Pretest vigilance control and fire system	Sheets of Group 11	oK
Power supply train bus	Sheets of Group 13	oK



Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/ 3.0 Downloading of Software

Type of Locomotive: WAP-7/WAG-9HC

Page: 7 of 27

3.1 Check Points.	Yes/No
Check that all the cards are physically present in the bus stations and all the plugs are connected.	YES
Check that all the fibre optic cables are correctly connected to the bus stations.	YES
Make sure that control electronics off relay is not energized i.e. disconnect Sub-D 411.LG and loco is set up in simulation mode.	YES
Check that battery power is on and all the MCBs (Pos. 127.*) in SB1 &SB2 are on	YES

3.2 Download Software

The software of Traction converter, Auxiliary converter and VCU should be done by commissioning engineer of the firm in presence of supervisor. Correct software version of the propulsion equipment to be ensured and noted:

Proposition of the proposition o	· · · · · · · · · · · · · · · · · · ·
Traction converter-1 software version:	1.0.69
Traction converter-2 software version:	1.0.6.9
Auxiliary converter-1 software version:	1.0.1.0
Auxiliary converter-2 software version:	2.0.1.0
Auxiliary converter-3 software version:	3.0.1.0
Vehicle control unit -1 software version:	6.0.0.18
Vehicle control unit -2 software version:	6.0.0.18

3.3 Analogue Signal Checking

Check for the following analogue signals with the help of diagnostic tool connected with loco.

Description	Signal name	Prescribed value	Measured Value
Brake pipe pressure	FLG2;0101XPrAutoBkLn	100% (= 5 Kg/cm2)	σK
Actual BE electric	FLG2; AMSB_0201- Wpn BEdem	100% (= 10V)	oK.
TE/BE at 'o' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 9% and 11 %	10%
TE/BE at 'TE maximal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 99 % and 101 %	100%
TE/BE at 'TE minimal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 20 % and 25 %	25%

John

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 39471

Type of Locomotive: WAP-7/WAG-9HC

Page : 8 of 27

TE/BE at 'BE maximal' position from both cab	XangTrans FLG2; AMSB_0101- XangTrans	Between 99% and 101%	100%
TE/BE at 'BE Minimal' position from both cab	FLG1; AMSB_0101- XangTrans FLG2; AMSB_0101- XangTrans	Between 20% and 25%	25%
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1: AMS_0101- LT/BDEM>1/3 HBB2; AMS_0101- LT/BDEM>1/3	Between 42 and 44%	44%
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1; AMS_0101- LT/BDEM>2/3 HBB2; AMS_0101- LT/BDEM>2/3	Between 72 and 74%	74%
Both temperature sensor of TM1	SLG1; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0° C to 40° C	22°c
Both temperature sensor of TM2	SLG1; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	21°c
Both temperature sensor of TM3	SLG1; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	21°c
Both temperature sensor of TM4	SLG2; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	22°c
Both temperature sensor of TM5	SLG2; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	21.5°
1	SLG2; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	22°c



Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 9 of 27

3.4 Functional test in simulation mode

Conduct the following functional tests in simulation mode as per Para 5.5 of document no.3EHX 610 281. through the Diagnostic tool/laptop :

Test Function	Result desired in sequence	Result obtained
Emergency shutdown through	VCB must open.	
emergency stop switch 244	Panto must lower.	CHECKED OK
Shut Down through cab activation	VCB must open.	
switch to OFF position	Panto must lower.	CHECKED OK
Converter and filter contactor	FB contactor 8.41 is closed.	
operation with both Power	By moving reverser handle:)
Converters during Start Up.	Converter pre-charging contactor	1
·	12.3 must close after few seconds.	
_	 Converter contactor 12.4 must close. 	TCHECKED OK
	Converter re-charging contactor	Checher
	12.3 must opens.	
	By increasing TE/BE throttle:	
	FB contactor 8.41 must open.	
	• FB contactor 8.2 must close.	
	• FB contactor 8.1 must close.	
Converter and filter contactor	1 4 1	
	Bring the cab activation key to "O"	
Converters during Shut Down.	• VCB must open.	
	Panto must lower.	
	• Converter contactor 12.4 must open.	rchecked ok
	• FB contactor 8.1 must open.	·
	• FB contactors 8.41 must close.	
	• FB contactor 8.2 must remain closed.	•
·	/	

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 39471

Type of Locomotive: WAP-7/WAG-9HC Page: 10 of 27

l		
Contactor filter adaptation by	Isolate any one bogie through bogie	\
isolating any bogie	cut out switch. Wait for self-test of	
·	the loco.	1/
	• Check that FB contactor 8.1 is open.	1
	 Check that FB contactor 8.2 is open. 	CHECKED OK
	After raising panto, closing VCB, and	PERIOR OFF
	setting TE/BE	us.
	FB contactor 8.1 closes.	
·	• FB contactor 8.2 remains open.	1
Test earth fault detection battery	By connecting wire 2050 to	
circuit positive & negative	earth, create earth fault	
	negative potential.	
	message for earth fault	
	By connecting wire 2095	CHECKEDOK
	to earth, create earth	
	fault positive potential.	
	• message for earth fault	•
Toot fine system. Create a smalle in	J. 14/1	
Test fire system. Create a smoke in the machine room near the FDU.	When smoke sensor-1 gets	· .
<u> </u>	activated then	
Watch for activation of alarm.	Alarm triggers and fault	
	message priority 2	
	appears on screen.	
	When both smoke sensor	CHECKED OK
	1+2 gets activated then	CHECKEDON
·	A fault message priority	•
	1 appears on screen and	
·	lamp LSF1 glow.	·
	 Start/Running interlock occurs and 	
	TE/BE becomes to 0.	
Time, date & loco number	Ensure correct date time and Loco	
	number	oK.
	<u> </u>	

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

4.0 Sensor Test and Converter Test

Page: 11 of 27

4.1 Test wiring main Transformer Circuits

Apply $198V_p/140V_{RMS}$ to the primary winding of the transformer (at 1u; wire no. 2 at surge arrestor and at 1v; wire no. 100 at earthing choke). Measure the output voltage and compare the phase of the following of the transformers.

Output Winding nos.	Description of winding.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
2U ₁ & 2V ₁	For line converter bogie 1 between cable 801A- 804A	10.05V _p and same polarity	10.05 UP	øΚ
2U ₄ & 2V ₄	For line converter bogie 1 between cable 811A- 814A	10.05V _p and same polarity	10.04vp	οΚ
2U ₂ & 2V ₂	For line converter bogie 2 between cable 801B- 804B	10.05V _p and same polarity	10.05Up	oK
2U ₃ & 2V ₃	For line converter bogie 2 between cable 811B- 814B	10.05V _p and same polarity	10.05vf	οΚ
2U _B & 2V _B	For aux. converter 1 between cable 1103- 1117 (in HB1) For Aux converter 2 between cable 1103- 1117 (in HB2)	7.9V _p , 5.6V _{RMS} and same polarity.	7.9 VP 5.6 VRMS	ьΚ
2U _F & 2V _F	For harmonic filter between cable 4-12 (in FB)	9.12V _p , 6.45V _{RMS} and same polarity.	9.12 VP 6.44 VRMS)	οK

4.2 Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)

Apply $141V_p$ / $100V_{RMS}$ to input of the auxiliary transformer at cable no 1203 –1117 and measure the output at

Description of wire no.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
Cable no. 1218 - 1200	58.7V _p , 41.5V _{RMS} and opposite polarity.	58-7 VP 415 VRMS1	oK
Cable no. 1218 – 6500	15.5V _p , 11.0V _{RMS} and opposite polarity.		0/

11.00 RHS

Sold Brown

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 12 of 27

4.3 Primary Voltage Transformer

Apply $250V_{eff}/350V_p$ by variac to roof wire 1 and any wire 0 and measure the magnitude and polarity of the output of the primary voltage transformer for both bogies as per the procedure specified and suggested by the traction converter manufacturer. Primary voltage measurement converters (Pos. 224.1/*) & catenary voltmeter (Pos. 74/*)

This test is to be done for each converter.

Activate cab in driving mode and supply $200V_{RMS}$ through variac to wire no 1501 and 1502. Monitor the following parameters through Diagnostic tool and in catenary voltmeter.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1_G 87-XUPrim	25kV	250%	25 KV	250 %
SLG2_G 87-XUPrim	25 kV	250%	2 <i>5 K</i> V	250 %

Decrease the supply voltage below 140 V_{RMS} . VCB must open at this voltage. In this case the readings in Diagnostic Tool and catenary voltmeter will be as follows.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1_G 87-XUPrim	17kV	170%	17KV	170 %
SLG2_G 87-XUPrim	17 kV	170%	1780	170 %

Reactivate VCB to on by increasing this voltage to 175% (17.5 kV).

Increase the supply to 240 V_{RMS} through variac. VCB must open at this voltage, In this case the readings in **diagnostic tool** and catenary voltmeter will be as follows:

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1_G 87-XUPrim	30kV	300%	30 KV	300 1/2
SLG2_G 87-XUPrim	30 kV	300%	30KV	300%

Reactivate VCB to on by decreasing this voltage to 290% (29 kV).

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 13 of 27

4.4 Minimum voltage relay (Pos. 86)

Functionality test:

Minimum voltage relay (Pos. 86) must be adjus	ted to approx 68%
Activate loco in cooling mode. Check Power supply of 48V to minimum voltage relay. Disconnect primary voltage transformer (wire no. 1511 and 1512) from load resistor (Pos. 74.2) and connect variac to wire no. 1501 and 1502. Supply 200V _{RMS} through variac. In this case; <i>Minimum voltage relay (Pos. 86) picks up</i>	(Yés/No)
Try to activate the cab in driving mode: Contactor 218 do not close; the control electronics is not be working.	(Yés/No)
Turn off the variac : Contactor 218 closes; the control electronics is be working	"(Yes/No)
Test Under Voltage Protection;	
Activate the cab in cooling mode; Raise panto; Supply 200V _{RMS} through variac to wire no. 1501 & 1502; Close the VCB; Interrupt the supply voltage The VCB goes off after 2 second time delay.	(Yés/No)
Again supply 200V _{RMS} through variac to wire no. 1501 & 1502; Decrease the supply voltage below 140V _{RMS} ± 4V; Fine tune the minimum voltage relay so that VCB opens.	\(Ves/No)

4.5 Maximum current relay (Pos. 78)

Disconnect wire 1521 & 1522 of primary current transformer; Connect variac to wire 1521 & 1522 (including the resistor at Pos. 6.11); Put loco in simulation for driving mode; Open R₃ – R₄ on contact 136.3; Close VCB; supply 3.6A_{RMS} at the open wire 1521; Tune the drum of the maximum current relay Pos. 78 for correct over current value;

VCB opens with Priority 1 fault message on display.

Keep contact R₃ – R₄ of 136.3 closed; Close VCB; Tune the resistor 78.1 for the current of 7.0A_{RMS} /9.9A_p at the open wire 1521;

VCB opens with Priority 1 fault message on display.

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 14 of 27

4.6 Test current sensors

Name of the sensor	Description of the test	Prescribed value	Set/Measured value
Primary return current sensor (Test-1,Pos.6.2/1 & 6.2/2)	Activate cab in driving mode supply 10A. Measure the current through diagnostic tool or measuring print.	(Variation allowed is ± 10%)	
Deimon	Supply 90mA _{DC} to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)	_	<u> </u>
Primary return current sensor (Test-2, Pos.6.2/1 & 6.2/2)	Supply 297mA _{DC} to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)		299mA
Auxiliary winding current sensor (Pos. 42.3/1 & 42.3/2)	Supply 90mA _{DC} to the test winding of sensor through connector 415.AC/1or 2 pin no. 7(+) & 8(-)	-	
	Supply 333mA _{DC} to the test winding of sensor through connector 415.AC/1 or 2 pin no. 7(+) & 8(-)	_	338 mA
Harmonic filter current sensors (Pos.8.5/1 &8.5/2)	Supply 90mA _{DC} to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)	-	
	Supply 342mA _{DC} to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)		347mp
Hotel load current sensors (Pos. 33/1 &	Switch on hotel load. Supply 90mA _{DC} to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) & 8(-)	•	
33/2)	Supply 1242mA _{DC} to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) & 8(-)		1280mA

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

4.7 Test DC Link Voltage Sensors (Pos 15.6/*)

Page: 15 of 27

This test is to be done by the commissioning engineer of the firm if required.

4.8 Verification of Converter Protection Circuits (Hardware limits) -

This test is to be done as per para 6.17 of the document no. 3EHX 610 282 for both the converters.

Protection circuits	Limit on which shutdown should take place	Measured limit
Current sensors (Pos 18.2/1, 18.2/2, 18.2/3, 18.4/4, 18.5/1, 18.5/2, 18.5/3) for Power Converter 1	Increase the current quickly in the test winding of the current sensors, VCB will off at 2.52A with priority 1 fault for each sensor.	For 18.2/1= For 18.2/2= For 18.2/3= For 18.4/4= For 18.5/1= For 18.5/2= For 18.5/3=
Current sensors (Pos 18.2/1, 18.2/2, 18.2/3, 18.4/4, 18.5/1, 18.5/2, 18.5/3) for Power Converter 2	Increase the current quickly in the test winding of the current sensors, VCB will off at 2.52A with priority 1 fault for each sensor.	For 18.2/1= For 8.2/2= For 18.2/3= For 18.4/4= For 18.5/1= For 18.5/2= For 18.5/3=
Fibre optic failure In Power Converter1	Remove one of the orange fibre optic plugs on traction converter. VCB should trip	OK
Fibre optic failure In Power Converter2	Remove one of the orange fibre optic plugs on traction converter. VCB should trip	oK

4.9 Sequence of BUR contactors

The sequence of operation of BUR contactors for 'ALL BUR OK' BUR 1 out BUR 2 out and BUR 3 out condition has to be verified by putting the Loco in driving mode (VCB should not be closed) and isolating the BURs one by one. In these condition following will be the contactor sequence.

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
AI BUR OK	Close	Open	Close	Open	Close	Open	Close	Close	Open
BUR1 off	Close	Open	Close	Close	Open	Close	Open	Open	Close
BUR2 off	Open	Open	Close	Close	Close	Close	Open	Open	Close
BUR3 off	Open	Close	Open	Close	Close	Close	Open	Open	Close



Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 16 of 27

Monitored contactor sequence

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
AI BUR OK	CLOSE	OPEN	CLOSE	OPEN	CLOSE	OPEN	CLOSE	CLOSE	OPEN
BUR1 off	CLOSE	OPEN.	Close	CLOSE	OPEN	CLOSE	OPEN	olen	CLOSE
BUR2 off	OPEN	OPEN	close	CLOSE	CLOSE	CLOSE	OPEN	OPEN	CLOSE
BUR3 off	OPEN	elose	OPEN	CLOSE	CLOSE	CCOSE	OPEN	OPEN	CLOSE

5.0 Commissioning with High Voltage

5.1 Check List

Items to be checked	Yes/No
Fibre optic cables connected correctly.	YES
No rubbish in machine room, on the roof, under the loco.	YES
All the electronic Sub-D and connectors connected	YES
All the MCBs of the HB1 & HB2 open.	YES
All the three fuses 40/* of the auxiliary converters	YES
The fuse of the 415/110V auxiliary circuit (in HB1) open.	YES
Roof to roof earthing and roof to cab earthing done	Yes
Fixing, connection and earthing in the surge arrestor done correctly.	YES
Connection in all the traction motors done correctly.	YES
All the bogie body connection and earthing connection done correctly.	YES
Pulse generator (Pos. 94.1) connection done correctly.	YES
All the oil cocks of the gate valve of the transformer in open condition.	YES
All covers on Aux & Power converters, Filter block, HB1, HB2 fitted	YES
KABA key interlocking system.	YES

5.2 Safety test main circuit breaker

Prepare to switch off the catenary supply during the first charging of the locomotive in case of any unexpected behavior of the electrical component of the loco. Charge the loco for the first time by closing BLDJ switch. The VCB will trip after certain time as no oil/coolant pumps are running yet.

Perform the following safety test of main circuit breaker through both the cabs of the locomotive.

Con Oll

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 17 of 27

Name of the test	Description of the test	Expected result	Monitored result
Emergency stop in cooling mode	Raise panto in cooling mode. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	CHECKED OK
Emergency stop	Raise panto in driving	VCB must open.	
in driving mode	mode in. Put the brake	Panto must /	
	controller into RUN	lower. 🤇	CHECKED OK
	position. Close the VCB.	Emergency (cheores or
	Push emergency stop	brake will be	
· ·	button 244.	applied.	,
Under voltage	Raise panto in cooling	VCB must open.	
protection in	mode. Close the VCB.]	CHECKED OK
cooling mode	Switch off the supply of	}	CHECKED OF
	catenary by isolator	\ \ \ \ \ \	٠
Under voltage	Raise panto in driving	VCB must open with	**************************************
protection in	mode. Close the VCB.	diagnostic message that / catenary voltage out of /	
driving mode	Switch off the supply of	limits	CHECKED OK
·	catenary by isolator	5	
Shut down in	Raise panto in cooling mode.	VCB must open.	
cooling mode.	Close the VCB. Bring the BL-	ے Panto must	CHECKED OK
- · ·	key in O position.	lower.	
Shutdown in	Raise panto in driving mode. Close	VCB must open.	
	the VCB. Bring the BL-key in O position.	Panto must	CHECKED OK
driving mode	position.	lower.	CHECKED BK
Interlocking	Raise panto in cooling	VCB must open.	
pantograph-	mode. Close the VCB.	/	
VCB in cooling	Lower the pantograph	(CHECKED OK
mode	by ZPT		
Interlocking	Raise panto in driving mode. Close	VCB must open.	
pantograph-	the VCB. Lower the pantograph by	/	
VCB in driving	ZPT	X	- CHECKED OK
mode		·)	



(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 18 of 27

5.3 Auxiliary Converter Commissioning

Switch on the high voltage supply and set up the loco in driving mode. Raise the panto. Close the VCB. Check that there is no earth fault in the auxiliary circuit, Switch off the VCB. Lower the panto. Create the earth fault in auxiliary circuit by making connection between wire no 1117(in HB2 cubicle) and earth. After 3 minutes a diagnostic message will come that "Earth fault auxiliary circuit."

5.3.1 Running test of 3 ph. auxiliary equipments

Switch on the 3 ph. auxiliary equipment one by one. Check the direction of rotation of each auxiliary machine and measure the continuous current and starting current drawn by them.

Name of the auxiliary machine	Typical phase current	Measured continuous phase current	Measured starting phase current
Oil pump transformer 1	9.8 amps	10.1	12.0
Oil pump transformer 2	9.8 amps	10.0	11.6
Coolant pump converter 1	19.6 amps	5.6	6.5
Coolant pump converter 2	19.6 amps	5.5	6.5
Oil cooling blower unit 1	40.0 amps	40.0	165.0
Oil cooling blower unit 2	40.0 amps	40.0	170.0
Traction motor blower 1	34.0 amps	30.0	145.0
Traction motor blower 2	34.0 amps	30.0	150.0
Sc. Blower to Traction motor blower 1	6.0 amps	4.5	16.0
Sc. Blower to Traction motor blower 1	6.0 amps	4.5	15.0
Compressor 1	25 amps at 0 kg/ cm ² 40 amps at 10 kg/ cm ²	27.0	135.0
Compressor 2	25 amps at 0 kg/ cm ² 40 amps at 10 kg/ cm ²	26.0	130-0



Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 19 of 27

5.3.2 Performance of Auxiliary Converters

Measure the performance of the auxiliary converters through software and record it. BUR1 (Condition: Switch off all the load of BUR 1)- to be filled by commissioning engineer

of the firm.

U j 4.1.4 j				
Signal name	Description of the signal	Prescribed value	Monitored value	Value under Limit (Yes/No)
BUR1 7303 XUUN	Input voltage to BUR1	75% (10%=125V)	1002V	YES
BUR1 7303 XUUZ1	DC link voltage of BUR1	60% (10%=100V)	636 V	YES
BUR1 7303 XUIZ1	DC link current of BUR1	0% (10%=50A) ,	1 AMP	YES

BUR2 (Condition: Switch off all the load of BUR 2, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed value by the firm	Monitored value	Value under Limit (Yes/No)
BUR2 7303-XUUN	Input voltage to BUR2	75% (10%=125V)	10011	YES
BUR2 7303-XUUZ1	DC link voltage of BUR2	60% (10%=100V)	637 V	YES
BUR2 7303-XUIZ 1	DC link current of BUR2	1% (10%=50A)*	7 AMP	YES
BUR2 7303-XUILG	Current battery charger of BUR2	3% (10%=100A)*	21 AMP	YES
BUR2 7303-XUIB1	Current battery of BUR2	1.5%(10%=100A)*	11 AMP	YES
BUR2 7303 –XUUB	Voltage battery of BUR2	110%(10%=10V)	lloV	Yes

^{*} Readings are dependent upon charging condition of the battery.

BUR3 (Condition: Switch off all the load of BUR 3, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed set value by the firm	Monitored value	Value under limit (Yes/No)
BUR3 7303-XUUN	Input voltage to BUR3	75% (10%=125V	1002V	YES
BUR3 7303- XUUZ1	DC link voltage of BUR3	60% (10%=100V)	637V	YES
BUR3 7303-XUIZ 1	DC link current of BUR3	1% (10%=50A)*	7 AMP	YES
BUR3 7303-XUILG	Current battery charger of BUR 3	3% (10%=100A)*	21 AMP	YES
BUR3 7303-XUIB1	Current battery of BUR 3	1.5%(10%=100A)*	HAMP	Yes
BUR3 7303-XUUB	Voltage battery of BUR 3	110%(10%=10V)	1100	YES

Readings are dependent upon charging condition of the battery.

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC Page: 20 of 27

5.3.3 Performance of BURs when one BUR goes out

When any one BUR goes out then rest of the two BURs should take the load of all the auxiliaries at ventilation level 3 of the locomotive.

Condition of BURs	Loads on BUR1	Loads in BUR2	Loads in BUR3	
All BURs OK	Oil Cooling unit 1&2	TM blower1&2, TFP oil pump 1&2, SR coolant pump 1&2.	Compressor 1&2, Battery charger and TM Scavenger blower 1&2	
BUR 1 out		Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2,TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.	CHECILES
BUR 2 out	Oil Cooling unit 1&2, TM blower 1&2, TM Scavenger blower 1&2		Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.	
BUR 3 out	Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.		

5.4 Auxiliary circuit 415/110

For checking earth fault detection, make a connection between wire no. 1218 and vehicle body. On switching on VCB, Earth fault relay 89.5 must pick up and after 3 minutes a message will come in the Diagnostic display that Earth Fault 415/110V Circuit.

Switch on the ${f 1}$ ph. auxiliary equipment one by one. Check the direction of rotation of each

Name of the auxiliary machine	Typical phase current	Measured phase current	Measured starting current	
Machine room blower 1	15.0 amps*	4,3	18.0	·
Machine room blower 2	15.0 amps*	4.4	20.0	
Sc. Blower to MR blower 1	1.3 amps	1.7	3.5	
Sc. Blower to MR blower 2	1.3 amps	1.1	3.8	
Ventilator cab heater 1	1.1 amps	1.2	2.0	
Ventilator cab heater 2	1.1 amps	1. 2	2.0	
Cab heater 1	4.8 amps	4.6	4.9	
Cab heater 2	4.8 amps	4-6	4.8	

^{*} For indigenous MR blowers.

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 21 of 27

5.5 Hotel load circuit (Not applicable for WAG-9HC)

For WAP-7 locomotive with Hotel load converter refer to Annexure-HLC

5.6 Traction Converter Commissioning

This test is carried out in association with Firm.

Traction converter commissioning is being done one at a time. For testing Converter 1, switch off the traction converter 2 by switch bogie cut out switch 154. For testing Converter 2, switch off the traction converter 2 by switch bogie cut out switch 154. Isolate the harmonic filter also by switch 160. Start up the loco by one converter. Follow the functionality tests.

For Converter 1

Test Function	Results desired	Result obtained
Measurement of charging and pre-charging and charging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
Measurement of discharging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
Earth fault detection on positive potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
Earth fault detection on negative potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
Earth fault detection on AC part of the traction circuit of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
Pulsing of line converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
Pulsing of drive converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKEP OK



Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 22 of 27

For Converter 2

Test Function	Results desired in sequence	Result obtained
Measurement of charging and pre- charging and charging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
Measurement of discharging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
positive potential of DC Link of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
negative potential of DC Link of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/v	CHECKED OK
AC part of the traction circuit of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK
Pulsing of drive converter of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CHECKED OK

Lips .

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 23 of 27

5.7 Test protective shutdown SR

Test Function	Results desired in sequence	Result obtained
Measurement of protective shutdown by Converter 1 electronics.	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Remove one of the orange fibre optic feedback cable from converter 1Check that converter 1 electronics produces a protective shut down. • VCB goes off • Priority 1 fault mesg. on DDU appears	CHECKED OK
	Disturbance in Converter 1	
Measurement of protective shutdown by Converter 2 electronics.	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Remove one of the orange fibre optic feedback cable from converter 2. Check that converter 2 electronics produces a protective shut down. • VCB goes off • Priority 1 fault mesg. on diagnostic display appears Disturbance in Converter 2	CHECKED OK

5.8 Test Harmonic Filter

Switch on the filter by switch 160

Test Function	Results desired in sequence	Result obtained		
currents	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Apply a small value of TE/BE by moving the throttle. • FB contactor 8.41 must open.	CHECKED OK		

- April - Company

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 39471

Type of Locomotive: WAP-7/WAG-9HC

Page: 24 of 27

		A contract of the contract of
	 FB contactor 8.2 must close. FB contactor 8.1 must close Check the filter current in diagnostic laptop Bring the TE/BE throttle to O Switch off the VCB FB contactor 8.1must open. FB discharging contactor 8.41 must close Check the filter current in diagnostic laptop 	CHECKED OK
Test earth fault detection harmonic filter circuit.	Make a connection between wire no. 12 and vehicle body. Start up the loco. Close VCB. • Earth fault relay 89.6 must pick up. • Diagnostic message comes that - Earth fault in harmonic filter circuit	CHECKED OK
Test traction motor speed sensors for both bogie in both cabs	Traction converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/ PLW	oK

5.9 Test important components of the locomotive

Items to be tested	Description of the test	Monitored value/remarks CHECKED OK	
Speedometer	VCU converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/ PLW		
Time delay module of MR blower The time after which the starting capacitor for MR blower should go off the circuit should be set to 10-12 seconds		CHECKED OK	
Ni-Cd battery voltage At full charge, the battery voltage should be 110V DC.		CHECKED OK	
Flasher light From both cab flasher light should blink at least 65 times in one minute.		CHECKED OIL	
Head light	Head light should glow from both cabs by operating ZLPRD. Dimmer operation of headlight should also occur by operating the switch ZLPRD.	CNECKED OK	

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 25 of 27

Marker light Both front and tail marker light should glow from both the cabs		enecked ok
Cab Light	Cab light should glow in both the cabs by operating the switch ZLC	CHECKED OK
Spot lights	Both Drivers and Asst. Drivers Spot light should glow in both cabs by operating ZLDD	CHECKED OK
Instrument lights	Instrument light should glow from both cab by operating the switch ZLI	CHECKED OK
Illuminated Push button	All illuminated push buttons should glow during the operation	CHECKED OK
Contact pressure of the high rating contactors	pressure The contact pressure of FB contactors (8.1, 8.2) is to be measured	
Crew Fan	All crew fans should work properly when VCB of the loco is switched on. The airflow from each cab fan is to be measured. Criteria: The minimum flow of air of cab fan should be 25 m³/minute	Cab 1 LHS: Cab 1 RHS: Cab 2 LHS: Cab 2 RHS:

6.0 Running Trial of the locomotive

SN	Description of the items to be seen during trail run	Action which should take place	
1	Cab activation in driving mode	No fault message should appear on the diagnostic panel of the loco.	CHECKED OK
	Loco charging	Loco to be charged and all auxiliaries should run. No fault message to appear on the diagnostic panel of the loco. Raise MR pressure to 10 Kg/cm ² , BP to 5 Kg/cm ² , FP to 6 Kg/cm ² .	CHECKED
3.	Check function of Emergency push stop.	This switch is active only in activated cab. By pushing this switch VCB should open & pantograph should be lowered.	CHECKED
4.	Check function of BPCS.	 Beyond 5 kmph, press BPCS, the speed of loco should be constant. BPCS action should be cancelled by moving TE/BE throttle, by dropping BP below 4.75 Kg/cm², by pressing BPCS again. 	enecked ok
5.	Check train parting operation of the Locomotive.	Operate the emergency cock to drop the BP Pressure LSAF should glow.	CHECKED

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page : 26 of 27

6.	Check vigilance	Set the speed more than 1.5 kmph and ensure that
	operation of the	brakes are released i.e. BC < 1 Kg/cm ² .
	locomotive	For 60 seconds do not press vigilance foot switch or
		sanding foots switch or TE/BE throttle or BPVG
		switch then
		Buzzer should start buzzing.
		LSVW should glow continuously.
		Do not asknowledge the alarm through RDVG or
:		vigilance foot switch further for 8 seconds then:-
		Emergency brake should be applied
		automatically.
		VCB should be switched off.
		Resetting of this penalty brake is possible only after
		32 seconds by bringing TE/BE throttle to 0 and
!		acknowledge BPVR and press & release vigilance
		foot switch.
7.	Check start/run interlock	• At low pressure of MR (< 5.6 Kg/cm ²).
	ondon ording rain interrock	The total pressure of this (1 5.5 kg/cm).
		• With park brake in applied condition———————————————————————————————————
		• With direct loco brake applied (BP< 4.75Kg/cm ²).
		• With automatic train brake applied (BP<4.75Kg/cm²). CHECKED OK
		• With emergency cock (BP < 4.75 Kg/cm ²).
8.	Check traction interlock	Switch of the brake electronics. The
		Tractive /Braking effort should ramp down, VCB
		should open and BP reduces rapidly.
9.	Check regenerative	Bring the TE/BE throttle to BE side. Loco speed
	braking.	should start reducing.
10.	Check for BUR	In the event of failure of one BUR, rest of the two
	redundancy test at	BURs can take the load of all the auxiliaries. For this
	ventilation level 1 & 3 of	switch off one BUR.
	loco operation	Auxiliaries should be catered by rest of two BURs.
		Switch off the 2 BURs; loco should trip in this case.
11.	Check the power	Create disturbance in power converter by switching
	converter	off the electronics. VCB should open and converter
,	isolation test	should get isolated and traction is possible with
		another power converter.

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 3947/

Type of Locomotive: WAP-7/WAG-9HC

Page: 27 of 27

7.0 Final check list to be verified at the time of Loco dispatch

Condition /Operations of the following items are to be checked:

SN	Item	Cab-1	Cab-2	Remarks
1	Head lights	oK	øK 🕥	
2	Marker Red	øΚ	oK /	
3	Marker White	σK	014	
4	Cab Lights	вK	ok	· · · · · · · · · · · · · · · · · · ·
5	Dr Spot Light	øK.	оК	
6	Asst Dr Spot Light	oK	oK	HECKED WORKING OK
7	Flasher Light	6K	oK (THE ROS WO KINNY OT
8	Instrument Lights	oK	014	
9	Corridor Light	o K	OK	
10	Cab Fans	οK	oK /	
11	Cab Heater/Blowers	oK	ol?	
12	All Cab Signal Lamps Panel 'A'	øK .	OK	

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format for 2x500KVA IGBT based Hotel Load Converter for 3-phase Electric Locomotives

Locomotive No.: 3947/	Page: 1 of 6
Type of Locomotive: <u>wap 7</u>	
Make of Hotel Load Converter:SIEMENS	
Details of Equipment: -	

Equipment	SI. No Equipment		SI. No
HLC1	STB4S1697HLCD	IV Coupler CAB1 ALP	◆
HLC2	STBYS1696 HLCD	IV Coupler CAB1 LP	
Converter-1	STBYS1697HLCD	IV Coupler CAB2 ALP	
Converter-2	STB431696HLCD	IV Coupler CAB2 LP	
UIC Coupler for Hotel Load Converter (353.3/2 CAB2)	_	UIC Coupler for Hotel Load Converter (353.3/3 CAB1)	

1. Polarity test of Hotel Load Winding:

Apply 198 /140 to the primary winding of the transformer (at 1U; wire no. 2 at surge arrestor and at 1V; wire no. 100 at earthing choke). Measure the output voltage and compare the phase of the following of the transformer.

Output Winding Nos.	Description of winding	Prescribed Output Voltage &Polarity with input supply	Measured Output	Measured Polarity
2UH1 & 2VH1	For Hotel load between cable 91- 94	5.9 ,4.2 and same polarity	oK	оК
2UH2 & 2VH2	For Hotel load between cable 91A- 94A	5.9 ,4.2 and same polarity	oK	oK.



Page: 2 of 6

2. Visual Inspection:

Fitment of Units and Earthing to Sub-assemblies

Verify the following Equipments Fitment and grounding cables are connected to Locomotive body.

SI. No.	Equipment Name	Unit Fitment (Yes/No)	Provision of Earthing (Yes/No)
. 1	HLC1	yes	her
2	HLC2	yes	Hos
3	Output Contactor unit1 HLC1	Jes	hoi
4	Output Contactor unit2 HLC2	Jes	yes
5	IV Coupler CAB1 ALP	Jos	Hos
6	IV Coupler CAB1 LP	Aei	Hos
7	IV Coupler CAB2 ALP	yes	yes
8	IV Coupler CAB2 LP	yag	Jes
9	UIC Coupler for Hotel Load Converter (353.3/3 CAB1)	Hei	Yey
10	UIC Coupler for Hotel Load Converter (353.3/2 CAB2)	Yes	yes
11	CT (LEM sensor) under HLC1	yes	Jes
12	CT(LEM sensor) under HLC2	Yes	Jes

Page: 3 of 6

30

3. Cable Routing and Laying

3.1 Control cable routing and layout

Verify the connections, tightness and cable routing of the following Control cable.

SI. No.	Cables Details	Performed (Yes/No)	
1	From Wago SB1 to HLC1 are connected as per wiring format	Jes	
2	From SB1 to UIC Coupler Hotel Load Converter (353.3/3 CAB2) through Bayonet connector XK22HL:01(22pin)is connected as per wiring format	yes	
3	From SB1 wago(XF22S:01/53) to IV coupler CAB1 ALP are connected as per wiring format	Hes	
4	From SB1 wago(XF22S:01/54) to IV coupler CAB1 LP are connected as per wiring format	Ans	
5	From Wago SB2 to HLC2 are connected as per wiring format	yes	
6	From SB2 to UIC Coupler Hotel Load Converter (353.3/2 CAB2) through Bayonet connector XK77HL:02 (22 pin) is connected as per wiring format	Jes	
7	From SB2 wago (XF77S:01/53) to IV coupler CAB2 ALP are connected as per wiring format	Jes	
8	From SB2 wago (XF77S:01/54) to IV coupler CAB2 LP are connected as per wiring format	کمتا	
9	From HLC1 to Contactor unit 1 through 4 Core Cable are connected as per wiring format	Jey	
10	From HLC2 to Contactor unit 2 through 4 Core Cable are connected as per wiring format	Jes	
11	From SB to VCU are connected as per wiring format	Jes	
12	From CT (HLC1 LEM sensor) to SR1 are connected as per wiring format	Aei	
13	From CT (HLC2 LEM sensor) to SR2 are connected as per wiring format	Jes	

3.2 Power cable routing and layout

Verify the connections, tightness and cable routing of the following Power cable.

SI.	Cables Details	Performed
No.		Yes/No)
1	From Transformer to HLC1(2UH1 & 2VH1) are connected as per wiring format	yes
2	From Transformer to HLC2(2UH2 &2VH2) are connected as per wiring format	yes
3	From HLC1 to Output Contactor unit1 are connected as per wiring format	yes
4	From HLC 2 to Output Contactor unit 2 are connected as per wiring format	hei
5	From Output Contactor unit 1 to IV Coupler CAB1 ALP and IV Coupler CAB2ALP through Junction box are connected as per wiring format	yes
6	From Output Contactor unit 2 to IV Coupler CAB2 LP and IV Coupler CAB1 LP through Junction box are connected as per wiring format	yes

4. Continuity test:

Check the continuity test for the External connections made to Equipments.

Note: This continuity test should be done before power ON the Locomotive Battery.

4.1 Control cable continuity

SI. No.	Cables Details	Performed (Yes/No)
1	From Wago SB1 to HLC1 are connected as per wiring format	yes
2	From SB1 to UIC Coupler Hotel Load Converter (353.3/3 CAB2) through Bayonet connector XK22HL:01(22pin)is connected as per wiring format	yes
3	From SB1 wago(XF22S:01/53) to IV coupler CAB1 ALP are connected as per wiring format	Jes :
4	From SB1 wago(XF22S:01/54) to IV coupler CAB1 LP are connected as per wiring format	yes
5	From Wago SB2 to HLC2 are connected as per wiring format	yes
6	From SB2 to UIC Coupler Hotel Load Converter (353.3/2 CAB2) through Bayonet connector XK77HL:02(22pin) is connected as per wiring format	Jes
7	From SB2 wago (XF77S:01/53) to IV coupler CAB2 ALP are connected as per wiring format	yes
8	From SB2 wago(XF77S:01/54) to IV coupler CAB2 LP are connected as per wiring format	Her
9	From HLC1 to Contactor unit 1 through 4 Core Cable are connected as per wiring format	Yes
10	From HLC2 to Contactor unit 2 through 4 Core Cable are connected as per wiring format	Jes
11	From SB to VCU are connected as per wiring format	745
12	From HLC1 LEM sensor to SR1 are connected as per wiring format	Seel
13	From HLC2 LEM sensor to SR2 are connected as per wiring format	Tues !

Page: 5 of 6

4.2 Power cable continuity

These cables continuity should be checked before mounting of converter in the locomotive.

SI. No.	Cables Details	Performed (Yes/No)
1	From Transformer to HLC1(2UH1 & 2VH1) are connected as per wiring format	YES
2	From Transformer to HLC2(2UH2 &2VH2) are connected as per wiring format	YES
3	From HLC1 to Output Contactor unit1 are connected as per wiring format	YES
4	From HLC 2 to Output Contactor unit 2 are connected as per wiring format	YES
5	From Output Contactor unit 1 to IV Coupler CAB1 ALP and IV Coupler CAB2ALP through Junction box are connected as per wiring format	Yes
6	From Output Contactor unit 2 to IV Coupler CAB1 LP and IV Coupler CAB2 LP through Junction box are connected as per wiring format	Yes

5. Battery power ON

Tests Supply Voltages

Remove all Control cable connectors (Analog and Digital Input/output connectors) from HLC1, HLC2. While Switch ON Battery supply observe is there any MCBs tripping. Wait for one or two minutes after switching ON Circuit breaker(MCB1) and observe for any overheating symptoms like smell, smoke, temperature etc. from the wire bunches. If any such symptoms are noticed, there might be a short circuit in the wire bunch. Check up once again continuity wherever suspected. After that check the Voltage levels at all equipments connectors as mentioned below.

Test Details	Acceptance	Observations
Voltage Level at HLC1: I. Between wago terminal XF22S:03/54 and XF22S:03/58 II. Between wago terminal XF22S:03/53 and XF22S:03/58	~110VDC	oK
Voltage Level at HLC2: I. Between wago terminal XF77S:03/52 and XF77S:03/56 II. Between wago terminal XF77S:03/51 and XF77S:03/56	~110VDC	ol<

Note: After Above tests switch off the Power and restore all removed connectors and once again switch ON the 110 V Supply and ensure that no MCB tripping due to abnormality.

Page: 6 of 6

6. Converter operation (ON/OFF) test

Power supply is directly available to the Hotel Load Converter via Hotel Load Converter winding (2UH1-2VH1) and (2UH2-2VH2). As soon as BLDJ is closed power will be available to the Hotel Load Converter. Connect the test jig of Hotel Load Converter to the UIC and IV Coupler. Charge the locomotive and switch on the BLHO, LSHO indication should glow. Hotel Load Converter screen will show message "waiting for ON command". One by one Hotel Load Converter can be switched on by test jig. Finally both the Hotel Load Converter should be turned out simultaneously. Observe the flow of air from the air duct, this will ensure that Hotel Load Converter is ON. Both the Hotel Load Converters are ON, then voltage and frequency should be measured as per the table below:-

Converters should run without any irregularities.

Hotel Load Converter 1				
Output Voltage			Output Frequency	
U-V	V-W	U-W	(Hz)	
oK	oK	oK	oK	

Hotel Load Converter 2			
Output Voltage Outpu		Output Frequency	
U-V	V-W	U-W	(Hz)
οΚ	oK	oK	OK

7. Earth Fault Test

- 7.1 Input Earth Fault:-Ground the input terminal of the Hotel Load Converter using a proper resistance and then turn on the Hotel Load Converter. The converter should trip with the message "Input earth fault".
- **7.2 Output Earth Fault:**-Ground the output terminal of the Hotel Load Converter using a proper resistance and then turn on the Hotel Load Converter. The converter should trip with the message "Output earth fault".

Note: These to be done for the both the converters (HLC1 and HLC2) separately.

Mary

Page: 33/A

33 A

Status of RDSO modifications

LOCO NO: 39471

Sn	Modification No.	Description	Remarks
1.	RDSO/2008/EL/MS/0357 Rev.'0' Dt 20.02.08	Modification in control circuit of Flasher Light and Head Light of three phase electric locomotives.	Øk/Not Ok
2.	RDSO/2009/EL/MS/0377 Rev.'0' Dt 22.04.09	Modification to voltage sensing circuit in electric locomotives.	Ok/Not Ok
3.	RDSO/2010/EL/MS/0390 Rev.'0' Dt 31.12.10	Paralleling of interlocks of EP contactors and Relays of three phase locomotives to improve reliability.	Øk/Not Ok
4.	RDSO/2011/EL/MS/0399 Rev.'0' Dt 08.08.11	Removal of interlocks of control circuit contactors no. 126 from MCPA circuit.	Øk/Not Ok
5.	RDSO/2011/EL/MS/0400 Rev.'0' Dt 10.08.11	Modification sheet for shifting the termination of \$GKW, 1.8 KV, 70 sq mm cables and 2x2.5 sq mm cables housed in lower portion of HB2 panel and provision of Synthetic resin bonded glass fiber sheet for three phase locomotives.	Ok/Not Ok
6.	RDSO/2011/EL/MS/0401 Rev.'0' Dt 10.08.11	Modification sheet for relaying of cables in HB-2 panel of three phase locomotives to avoid fire hazards.	Øk/Not Ok
7.	RDSO/2011/EL/MS/0403 Rev.'0' Dt 30.11.11	batteries in three phase electric locomotives.	Øk/Not Ok
8. 	RDSO/2012/EL/MS/0408 Rev.'0'	assembly	-Øk/Not Ok
9.	RDSO/2012/EL/MS/0411 Rev.'1' dated 02.11.12	Modification sheet to avoid simultaneous switching ON of White and Red marker light in three phase electric locomotives.	OK/Not Ok
10	RDSO/2012/EL/MS/0413 Rev.'1' Dt 25.04.16	of three phase locomotives to improve reliability.	Ok/Not Ok
11	RDSO/2012/EL/MS/0419 Rev.'0' Dt 20.12.12	Modification sheet to provide rubber sealing gasket in Master Controller of three phase locomotives.	Ok/Not Ok
12	RDSO/2013/EL/MS/0420 Rev.'0' Dt 23.01.13	Modification sheet to provide mechanical locking arrangement in Primary Over Current Relay of three phase locomotives.	Øk/Not Ok
13	RDSO/2013/EL/MS/0425 Rev.'0' Dt 22.05.13	diffilier mode in tiffee phase electric locomotives.	tØk/Not Ok
14	RDSO/2013/EL/MS/0426 Rev.'0' Dt 18.07.13	Modification sheet of Bogie isolation rotary switch in three phase electric locomotives.	Ok/Not Ok
15	RDSO/2013/EL/MS/0427 Rev.'0' Dt 23.10.13	Modification sheet for MCP control in three phase electric locomotives.	*Ok/Not Ok
16 ·	RDSO/2013/EL/MS/0428 Rev.'0' Dt 10.12.13	Modification sheet for relocation of earth fault relays for harmonic filter and hotel load along with its resistors in three phase electric clocomotives.	Øk/Not Ok
17	RDSO/2014/EL/MS/0432 Rev.'0' Dt 12.03.14	Removal of shorting link provided at c-d terminal of over current relay of three phase electric locomotives.	Øk/Not Ok
18	RDSO/2017/EL/MS/0464 Rev.'0' Dt 25.09.17	Provision of Auxiliary interlock for monitoring of Harmonic filter ON (8.1)/adoption (8.2) Contactor in GTO/IGBT locomotives.	Øk/Not Ok
19	RDSO/2017/EL/MS/0467 Rev.'0' Dt 07.12.17	Modification in blocking diodes to improve reliability in three phase electric locomotives.	Ok/Not Ok
20	RDSO/2018/EL/MS/0475 Rev.'0'	Modification in existing Control Electronics (CE) resetting scheme of 3 phase electric locomotives.	Øk/Not Ok
21	RDSO/2019/EL/MS/0477 Rev.'0' Dt 18.09.19	Implementation of push pull scheme.	Øk/Not Ok
22	RDSO/2024/EL/MS/0500 Rev '0' Dt. 13.09.2024	3-phase Electric Locomotives.	Ok/Not Ok
23	RDSO/2024/EL/MS/0502 Rev '0' Dt 10.10.2024	Unloader valve control circuit modification in three Phase Electric Locomotives.	Ok/Not Ok
24	RDSO/2024/EL/MS/0503 Rev '0' Dt 17.09.2024	Paralleling of interlocks of control circuit contactor to improve reliability of three phase electric locomotives	-Øk/Not Ok
25	RDSO/2024/EL/MS/0504 Rev '0' Dt 21.11.2024	Paralleling of interlocks of control circuit contactor to improve reliability of three phase electric locomotives.	Ok/Not Ok



Loco No. : 39471

PLW/PATIALA

PNEUMATIC TEST PARAMETERS OF 3-PHASE ELECTRIC LOCOMOTIVES

(As per DG/RDSO/LKO's letter No.-EL/3.2.19/3phase, dated-29.03.2012)

SN	Parameters	Reference	Value	Result
	Brake Panel: FAIVELEY			
1.0	Auxiliary Air supply system (Pantograph & VCB)			
1.1	Ensure, Air is completely vented from pantograph			0
	Reservoir (Ensure Panto gauge reading is Zero)			
1.2	Turn On BL Key. Now MCPA starts.	For Faiveley	60 sec. (Max.)	60 sec.
	Record pressure Build up time (8.0 kg/cm2)	For Knorr	120 sec. (Max.)	
1.3	Auxiliary compressor safety Valve 23F setting	Faiveley Doc. No.	8.5±0.25kg/cm2	8.6 kg/cm2
		DMTS-014-1, 8 CLW's	-	
		check sheet no.		
		F60.812 Version 2		
1.4	Check VCB Pressure Switch Setting	CLW's check sheet	Opens 4.5±0.15	4.5
		no. F60.812 Version 2	kg/cm2, closes	
			5.5±0.15 kg/cm2	5.5
1.5	Set pantograph Selector Switch is in Auto, Open pan-1&2 Is	colating Cocks & KABA co	ock by Key (KABA Key)
1.6	Set Cab-1 Pan UP in Panel A.		Observed Pan-2	Ok
			Rises.	
1.7	Close Pan-2 isolating Cock		Panto-2 Falls Down	Ok
	Open Pan -2 isolating Cock		Panto-2 Rises	
1.8	Record Pantograph Rise time		06 to 10 seconds	9 sec
1.9	Record Pantograph Lowering Time		06 to 10 seconds	8 sec
1.10	Panto line air leakage		0.7 kg/cm2 in 5	0.40 kg/cm2
			Min.	in 5 min.
1.11	High Reach Panto emergency test and reset.			Ok
2.0	Main Air Supply System			
2.1	Ensure, Air is completely vented from locomotive. Drain	Theoretical		
	out all the reservoirs by opening the drain cocks and then	calculation and		
	closed drain cocks. MR air pressure build up time by each	test performed by		
	compressor from 0 to 10 kg/cm2.	Railways.		
	i) with 1750 LPM compressor		i) 7 mins Max.	6 min.& 45
	ii) with 1450 LPM compressor		ii) 8.5 mins Max.	sec.
2.2	Drain air below MR 8 kg/cm2 to start both the		Check Starting of	Ok
	compressors		both compressors	
2.3	Drain air from main reservoir up to 7 kg/cm2. Start		30 Sec. (Max)	CP1-28 sec
	compressors, Check pressure build time of individual			CP2-29 sec
	compressor from 8 kg/cm2 to 9 kg/cm2	2000	0	
2.4	Check Low MR Pressure Switch Setting (37)	D&M test spec.	Closes at 6.40±0.15	6.4 kg/cm2
		MM3882 &	kg/cm2 Opens at	F. C. L / 2
2.5	Charles a response of the Park Book and the Park	MM3946	5.60±0.15kg/cm2	5.6 kg/cm2
2.5	Check compressor Pressure Switch RGCP setting (35)	D&M test spec.	Opens at 10±0.20	10 .2kg/cm2
		MM3882 &	kg/cm2, Closes at	0.1/- 2
2.5	Don't hadde the second 20 10 10 10 10 10	MM3946	8±0.20 kg/cm2	8 kg/cm2
2.6	Run both the compressors Record Pressure build up time	Trial results	3.5 Minutes Max.	3.3 min

PLW/PATIALA

Loco No.: 39471

2.7	Check unloader val	lve operation				OK/ Not OK	ОК
2.8	Check Auto Drain \	/alve functioning (1	24 & 87)			Operates when	11.5
						Compressor	kg/cm2
						starts	
2.9		safety valve setting	g (10/1). Run CP		est spec.	11.50±0.35	11.55
	Direct by BLCP.			MM3882	& MM3946	kg/cm2	kg/cm2
2.10		y safety valve settin	g (10/2). Run CP		est spec.	11.50±0.35	
	direct by BLCP			+	& MM3946	kg/cm2	
2.11		ompressors and ens			est spec.		
	pressure.	essure 1.2 kg/cm2 l	ess than opening	IVIIVI3882	& MM3946		
2.12	F	h 'OFF' compressor,	Drain MR Pressure	CI W's char	ck sheet no.	5.0±0.10kg/cm2	5.0 kg/cm2
2.12		Main Reservoir, Sta		F60.812 Ve		3.0±0.10kg/cm2	3.0 Kg/CITIZ
	1 -	sure of Duplex Chec	•				
2.13	FP pressure:	•		CLW's chec	ck sheet no.	6.0±0.20kg/cm2	6.0 kg/cm2
	Fit Test Gauge in To	est point 107F FPTP	. Open isolate cock	F60.812 Ve	ersion 2		
	136F. Check pressu	ıre in Gauge.					
3.0	Air Dryer Operat						
3.1	l .	0 of 2 nd MR to start	•			Tower to change	Ok
		k Air Dryer Towers				every minute	
3.2			t Compressor stops			DI	Ok
3.3 4.0		Check condition of humidity indicator Main Reservoir Leakage Test				Blue	Blue
4.1		_	eck MR Pressure air	D8.M+	est spec.	Should be less	0.5 kg/cm2
4.1	leakage from both	•	eck with Fressure all		& MM3946	than 1 kg/cm2 in	in 15 min.
	8					15 minutes	
4.2	Check BP Air leakag	ge (isolate BP charg	ing cock-70)	D&M t	est spec.	0.15 kg/cm2 in 5	0.05
				MM3882	& MM3946	minutes	kg/cm2 in 5
							min.
5.0	·	matic Brake oper					
5.1	Record Brake Pipe	& Brake Cylinder pr	essure at Each Step				
	Check proportiona	lity of Auto Brake sy	/stem	CLW's che	ck sheet no.		
		,		F60.812	Version 2		
		T · ·					
	Auto controller	BP Pressure kg/ci	m2		& WAP-7)	BC (WAP-5)	
	position			Kg/cm2		Kg/cm2	
		Value	Result	Value	Result	Value	
		5.04		0.00		0.00	
	Run	5±0.1	5.05 Kg/cm2	0.00	0.00 Kg/ cm2	0.00	-
	Intial	4.60±0.1	4.6 Kg/cm2	0.40±0.1	0.40Kg/ cm2	0.75±0.15	-
	Full service	3.35±0.2	3.4 Kg/cm2	2.50±0.1	2.5Kg/ cm2	5.15±0.30	-
		+	0.25 Kg/cm2		+		

PLW/PATIALA

Loco No.: 39471

		1		
5.2	Record time to BP pressure drop to 3.5 kg/cm2 Ensure	D&M test spec.	8±2 sec.	8 sec.
	Automatic Brake Controller handle is Full Service from Run	MM3882 & MM3946		
5.3	Operate Asst. Driver Emergency Cock,	D&M test spec.	BP pressure falls	
		MM3882 & MM3946	to Below 2.5	Ok
			kg/cm2	
5.4	Check brake Pipe Pressure Switch 69F operates	CLW's check sheet no.	Closes at BP	4.1
		F60.812 Version 2	4.05- 4.35	kg/cm2
			kg/cm2	
			Opens at BP	
			2.85- 3.15	3 kg/cm2
			kg/cm2	
5.5	Move Auto Brake Controller handle from Running to	D&M test spec.		
	Emergency BC filling time from 0.4 kg/cm2 i.e. 95% of	MM3882 & MM3946		
	Max. BC developed			
	WAP5 – BC 5.15 \pm 0.3 kg/cm2 apply time		4±1 sec.	
	WAP7 - BC 2.50 ± 0.1 kg/cm2		7.5±1.5 sec.	7 sec.
	WAG9 - BC 2.50 ± 0.1 kg/cm2		21±3 sec.	
	j.			
5.6	Move Auto Brake Controller handle to full service and	D&M test spec.		
	BP pressure 3.5 kg/cm2. Move Brake controller to	MM3882 & MM3946		
	Running position BC Release time to fall BC Pressure up			
	to 0.4 kg/cm2 i.e. 95% of Max. BC developed			
	BC release Time			
	WAP7		17.5±2.5 sec.	18 sec.
	WAG9		52±7.5 sec.	
5.7	Move Auto Brake Controller handle to Release, Check	CLW's check sheet no.	60 to 80 Sec.	78 sec.
	BP Pressure Steady at 5.5± 0.2 kg/cm2 time.	F60.812 Version 2		
5.8	Auto Brake capacity test : The capacity of the A9 valve	RDSO Motive power	BP pressure	
	in released condition must conform to certain limit in	Directorate report no.	should not fall	
	order to ensure compensation for air leakage in the	MP Guide No. 11 July,	below 4.0	
	train without interfering with the automatic	1999 Rev.1	kg/cm2 with in	4.60
	functioning of brake.		60 Sec.	kg/cm2
	* Allow The MR pressure to build up to maximum			
	stipulated limit.			
	* Close brake pipe angle cock and charge brake pipe to			
	5 kg/cm2 by A-9 (Automatic brake controlling) at run			
	position.			
	* Couple 7.5 dia leak hole to the brake hose pipe of			
	locomotive. Open the angle cock for brake pipe.			
	The test shall be carried out with all the compressors in			
	working condition.			
5.9	Keep Auto Brake Controller (A-9) in Full Service. Press		BC comes to '0'	0
	Driver End paddle Switch (PVEF)			
6.0	Direct Brake (SA-9)			
6.1	Apply Direct Brake in Full Check BC pressure			
	WAG9/WAP7	CLW's check sheet no.	3.5±0.20 kg/cm2	3.6
	WAP5	F60.812 Version 2	5.15±0.3 kg/cm2	kg/cm2
6.2	Apply Direct Brake, Record Brake Cylinder charging	D&M test spec.	8 sec. (Max.)	7 sec.
1	time	MM3882 & MM3946		1

PLW/PATIALA

Loco No.: 39471

6.3	Check Direct Brake Pressure switch 59 (F)	D&M test spec. MM3882 & MM3946	0.2.±0.1 kg/cm2	0.20 kg/cm2
6.4	Release direct brake & BC Release time to fall BC pressure up to 0.4 kg/cm2		10 -15 Sec.	14 Sec
7.0	Modified System Software (only for CCB)			
7.1	Bail-off de-activated during emergency by any means			Now De- activated
7.2	DPWCS and Non-DPWCS mode enabled		Multi Loco	
7.3	TCAS and Non-TCAS mode enabled		Not Yet Launched	Presently
7.4	Penalty brake application deactivated for Fault code 113 (FC 113) and CCB health signal will not drop to avoid loco detention/failure. The Brake Electronics Failure "message will not generate on DDS.	DDCO letter ve	Pressure Setting Needed is12 kg/sqcm Causing mismatching with standard Pr Setting	not happening in PLW
7.5	CCB health signal logic revised (Now will remain high) for penalty condition occurring with FC 108 due to wrong operation/not affecting operation/ Not a CCB Fault (i.e Both controllers selected as LEAD etc) The Brake electronic failure message will not generate on DDS	RDSO letter no. EL/3.2.19/3-phase (CCB), dtd 30.01.2023		Brake electronic failure message not generate on DDS
7.6	CCB health signal logic for FC 102 (In case of BC request from VCU is more than 90 %-above 9V DC) is changed i.e CCB health signal will not drop for FC 102 which will avoid loco detention/failure. The brake electronic failure message will not generate on DDS.		Could not performed by M/s faiveley	Presently not happening in PLW
7.7	Booting time for CCB with TCAS/TPM/PTWS/DPWCS mode 15-20 sec. However, in case of absence of either one or both system booting time subsequently increased to 40-50 sec.			48 sec
8.0	Sanding Equipment			
8.1	Check Isolating Cock-134F is in open position. Press sander paddle Switch. (To confirm EP valves Operates)		Sand on Rail	Ok
9.0	Test Vigilance equipment : As per D&M test specification			Ok

39471

			Ro	oof compnent Cab-:	1 & Cab-2	
S.NO.	DESCRIPTION	PL NO.	•	SUPPLIER	Sr.No.	Warranty
1	Pantograph	25880068	2	Contransys	15851-12/24, 16084-01/25	
2	Servo Motor	25880068	2	Contransys	16080-01/25,16096-01/25	1
3	Air Intake Filter Assembly	29480103	2	Vikrant Engg. Works	3309-09/2024, 3597-03/2025	
4	Insulator Panto	29810127	8	MIL	03-2025, 03-2025	
			Middle	roof Component	-]
5	High Voltage Bushing	29731021	1	Safe system India	MFG/09/2024/HVB-70R	
6	Voltage Transformer	29695028	1	CG Power	243378-2024]
7	Vaccum Circuit Breaker	25712202	1	Autometers	AALN/04/2025/021/VCBA/021	
8	Insulator Roof Line	29810139	9	BHEL / MIL	09-2024 / 02-2025	
9	Harmonic Filter	29650033	1	Daulat Ram	24K/RHFG/06/758-10/2024	As per PO/IRS Conditions
10	Earthing Switch	29700073	1	Patra & Chanda	304-09/2024]
11	Surge Aresster	29750052	2	CG POWER &	58232-2024, 58233-2024	
			Air Bra	ke Components		
12	Air Compressor (A,B)	29511008	2	ELGI	EXFS-923416 A EXFS -923334 B	
13	Air Dryer	29162051	1	TRIDENT	LD2-01-1238-25	
14	Auxillary Compressor	25513000	1	CEC	RB 5055-02-25	
15	Air Brake Panel	29180016	1	FAIVELEY	DEC24-64-WAG9-3829	
16	Controller (A,B)	29180016	2	FAIVELEY	M 24-019 A, M 24-011 B	
17	Break Up Valve	29162026	2	FAIVELEY]
18	Wiper Motor		4	AUTO IND		

SSE/ABS

7. Xa. 6672

PLW/PTA

ELECTRIC LOCO HISTORY SHEET (ECS)

ELECTRIC LOCO NO: 39471

RLY: NR SHED: GZBE

PROPULSION SYSTEM: ALSTOM

HOTEL LOAD CONVERTER: MEDHA

LIST OF ITEMS FITTED BY ECS

SN	DESCRIPTION OF ITEM	ITEM PL NO.	ITEM SR. NO CAB-1/CAB-2		MAKE/SUPPLIER
1	LED Based Flasher Light Cab I & II	29612937	4918/4991		POWER TECH
2	Led Marker Light Cab I & II	29612925	10451/10449/	10342/10346	SIRVEEN
3	Cab Heater Cab I & II	29170011	2777/	2736	TOPGRIP
4	Crew Fan Cab I & II	29470080	5686/5797/	5827/5748	MTI
5	Master Controller Cab I		MFG	6623	KEPCO
6	Master Controller Cab II	29860015	MFG	628	REPCO
7	Complete Panel A Cab I & II	29170564	25030282	25030296	TROLEX
8	Complete Panel C Cab I & II	29170539	3734	3803	KEPCO/ALSTOM
9	Complete Panel D Cab I & II	29170564	25030279	25030296	TROLEX
10	Complete Cubicle- F Panel Cab I & II	29178162	2807 04/25	2825 04/25	CG
11	Speed Ind.& Rec. System	29200040	5642/	6316	MEDHA
12	Battery (Ni- Cd)	29680025	1231/1236-12	37/1239-1261	SAFT URJA
13	Set of Harnessed Cable Complete	29600418			THERMOCABLES
14	Transformer Oil Pressure Sensor (Cab-1) (pressure sensor oil circuit transformer)	29500047	1928 Feb25	2925 9/25	BG INDUSTRIES/
15	Transformer Oil Pressure Sensor (Cab-2)		1320 Jun24	2916 9/24	LAXVEN
16	Transformer Oil Temperature Sensor (Cab- 1)(temperature sensor oil circuit transformer)	29500035	BG/TFP/90	059 Aug24	BG INDUSTRIES
17	Transformer Oil Temperature Sensor (Cab-2)		BG/TFP/89	978 Aug24	BG INDUSTRIES
18	Roof mounted Air Conditioner I	29811028	KKI/HVAC/	CLW/2812	- KKI
19	Roof mounted Air Conditioner II	29011020	KKI/HVAC/	CLW/2803	TANI
			India rail navigator	7961	· ·
20.	RTIS(Real time information system)		Power supply module	7961	Aventel Ltd., India
<u> </u>			Rail MSS Terminal	7982	

SSE/JE/Roof &U/F

SSE/JE/Machine Room

SSE/JE/TEST ROOM

SSE/JE/Harness

		LOCO NO :- 3947	1/WAP-7/NR/GZB	E		
S.N.	Equipment	PL No.	Equipmen	t Serial No.	Ma	ke
	Complete Shell Assembly with piping	29171064		03/2025	TRID	ENT
2	Side Buffer Assly Both Side Cab I,n		499, 02/25	NA, 03/25	AEU	AEU
3	Side Buffer Assly Both Side Cab II	29130050	116, 02/25	418, 02/25	AEU	AEU
4	CBC Cab I & II	29130037	4056, 02/25	4057, 02/25	FAS	FAS
· .	Hand Brake	232000.		2 -2/25	Modified hand	
	Set of Secondry Helical Spring	29045034 29041041		-,	GE	
7	Battery Boxes (both side)	29680013	189, 03/25	114, 01/25	BHARTIA BRIGHT	BHARTIA BRIGH
	Traction Bar Bogie I		8877,	. 03/25	KI	VI
	Traction Bar Bogie II		8855,	03/25	KI	VI
	Centre Pivot Housing in Shell Bogie I side		486,	02/25	AN	IIL
_	Centre Pivot Housing in Shell Bogie II side	29100057	452,	02/25	. AN	IIL
_	Elastic Ring in Front in Shell Bogie I side		06/43	, 10/24	SS	PL
	Elastic Ring in Front in Shell Bogie II side	29100010		, 10/24	SS	PL +
	Main Transformer	29731008 for WAG 9 29731057 for WAP-7		058350, 2025	ВН	EL
15	Oil Cooling Radiator I		FG415002/24	-25/321, 01/25	APOLLO HEAT	EXCHANGER
_	Oil Cooling Radiator II	29470031	FG415002/24	-25/352, 02/25	APOLLO HEAT	EXCHANGER
	Main Compressor I with Motor			334, 09/24	EL	Gi
$\overline{}$	Main Compressor II with Motor	29511008		116, 09/24	ELGi	
_	Transformer Oil Cooling Pump I			151, 10/24	FLOV	VOIL
_	Transformer Oil Cooling Pump II			130, 10/24	FLOV	VOIL
			76, 974, 75,	001587151, 11/24	ACC	CEL
	Oil Cooling Blower OCB I	29470043		01585976, 11/24	ACC	
	Oil Cooling Blower OCB II			4P7510/15,03/25	SAINI ELE	
	TM Blower I	29440075	0/1 (00.0)	4P5358/24, 03/25	SAINI ELE	
	TM Blower II	•		1.10, 02/25		TR .
_	Machine Room Blower I	29440105		.12, 02/25	G	
	Machine Room Blower II			.32, 03/25	G	
-	Machine Room Scavenging Blower I	29440129		.72, 03/25	G	
_	Machine Room Scavenging Blower II			.40, 03/25		TR 5
-	TM Scavenging Blower Motor I	29440117		.09, 03/25	G	
	TM Scavenging Blower Motor II .			ROPULSION-A/4202	-	
	Fraction Convertor I				+	
	Fraction Convertor II			ROPULSION-A/4201	-	
	Vehicle Control Unit I	29741075		ROPULSION-A/4201 ROPULSION-A/4202	_ вт	TL 🕝
_	Vehicle Control Unit II			32A/1254, 02/25	-	
	Aux. Converter Box I (BUR 1)			52B/1254, 02/25		
-	Aux. Converter Box 2 (BUR 2 + 3)	29176645		8, 04/25	CONTIN	IENTAL
_	Axillary Control Cubical HB-1	29176657		/HB2P7/084, 03/25	AUTON	
-	Axillary Control Cubical HB-2 Complete Control Cubicle SB-1	29176669		57, 02/25	TRO	LEX
-	Complete Control Cubicle SB-2	29178174		03265, 03/25	STES	ALIT
-	Filter Cubical (FB) (COMPLETE FILTER	29480140		V0274/675	HIND RE	CTIFIER
_	Driver Seats	29171131	PLW/586,4/23	5.35,6,71,29		
	Hotel Load Converter I		STB4S1697	HLCD, 04/24	SIEM	
	Hotel Load Converter II	29741087		HLCD, 04/24	SÌEM	EN2
	Transformer oil steel pipes	29230044		IPES	01514	ENC
	Hotel Load Contactor I			HLCD, 04/24	SIEM SIEM	
47	Hotel Load Contactor II	1	STB4S1696	HLCD, 04/24	SIEIVI	LINJ
	Conservator Tank Breather Silica Gel	29731057 29611908	2000,0	Rag	ens	ave
48						Y .

NAME Pesh Bandhu SSE/LAS NAME.... Payming for Mang

NAME ALLET OPPAL
JE/LAS/UF

Issue No.: 05 Effective Date: July-2023

DOC NO: F/LAS/Electric Loco CHECK SHEET (Ref: WI/LAS/Elect/01, 02, 03 & 04 & QPL/LAS/Elect. Loco)

Page 1 of 1

पटियाला रेलइंजन कारखाना, पटियाला PATIALA LOCOMOTIVE WORKS, PATIALA ELECTRIC LOCO CHECK SHEET

LOCO NO: 39471

Shed: GZBE

S. No.	ITEM TO BE CHECKED	Specified Value		Observe	d Va	lue	
1.1	Check proper Fitment of Hotel Load Converter & its output contactor.	OK	OK				
1.2	Check proper Fitment of MR Blower 1 & 2, MR Scavenging Blower 1 & 2, TM Blower 1 & 2, TMB Scavenging Blower 1 & 2. TM scavenging blower 1 & 2 & Oil Cooling unit.	ОК		OK			
1.3	Check proper of Fitment of oil cooling unit (OCU).	OK		OK			
1.4	Check proper Fitment of HB 1 & 2 and its respected lower part on its position.	OK		OK			
1.5	Check proper Fitment of FB panel on its position.	OK	0.2	GK			
1.6	Check proper Fitment of assembled SB1 & SB2 panel.	OK		OK			
1.7	Check proper Fitment of Auxiliary converter 1, 2 & 3-(BUR-1, 2 & 3).	OK		010	_		
1.8	Check proper Fitment of Traction converter 1 & 2 (SR-1 & 2).	OK		OK			
1.9	Check proper fitment, torquing & Locking of Main Transformer bolt.	OK		OK			
1.10	Check proper fitment of Main compressor both side with the compressor safety wire rope.	OK		0			
1.11	Check proper resting of Secondary Helical Springs between Bogie & Shell body.	OK		0 1	<		
1.12	Check proper fitment of Bogie Body Safety Chains.	OK		O	(
1.13	Check proper fitment of Cow catcher.	OK		OF			
1.14	Check coolant level in SR 1 & 2 Expansion Tank.	OK	OK I			4	
1.15	Check Transformer Oil Level in both conservators Tank (Breather Tank).	OK	OK				
1.16	Check proper fitment and maintain required gaps from Loco Shell Body of all metallic pipes to avoid any damage during online working of Locomotives.	OK	OK				
1.17	Check proper fitment of both battery box.	OK		OK.		S.	
1.18	Check for any gap between Main Transformer mounting base & Loco Shell.	OK		ok			
1.19	Check proper fitment of Push Pull rod its bolt torquing and fitment of fixing cable. As per Drg No 1209-01-113-001	OK			3K		
1.20	Secondary Vertical and Lateral Clearance on leveled track at the time of Loco Dispatch.		C	AB-1		CAB-2	
	ELRS/TC/ 0082 (Rev 1) dated 17.09.2015	Vertical-Std :35-60 mm	LP	ALP	LP	ALP	
		Lateral Std- 45-50 mm		V			
1.21	Buffer height: Range (1090, +15,-5).	1085-1105		L/S	S	R/S	
	Drg No IB031-02002.	mm	FRONT	110	00	1097	
			REAR	100		1097	
1 22	Buffer Length: Range (641 mm + 3 to 10 mm with buffer face)	641 mm	7 127 11 1	10		R/S	
1.22	Drg No-SK.DL-3430.	04111111	FRONT				
	DIS NO-OKIDE-0400.	Barrer II		07		648	
			REAR	64		646	
1.23	Height of Rail Guard. (114 mm + 5 mm,-12 mm).	114 mm + 5		L	_	R/S	
	As per RDSO Pamphlet Important Bogie Clearances of Electric Locomotives.	mm,-12 mm	FRONT	11	7	112	
io Li			REAR	110		113	
1.24	CBC Height: Range (1090, +15,-5) Drg No- IB031-02002.	1090, +15 -5 mm	FRONT	FRONT: 1095 REAR: 1095			

Pesh Bandha (Signature of SSE/Elect. Loco)

DATE 30/03/2025

Eam! (Signature of /JE/Elect Loco)

NAME famora Mema

DATE 30/03/2025

treat who (Signature of JE/UF)

NAME ANKIT UPPAL

DATE 30/03/2025

Loco No. 39471

1. BOGIE FRAME:

BOGIE	FRAME NO	Make	PL No.	PO No. & dt.	Warranty Period
FRONT	SL-441	ECBT	29101104	102079	As per PO/IRS
REAR	SL-448	ECBT	29101104	102079	conditions

2. Hydraulic Dampers (PL No.29040140) Make: KONI/KONI

3. AXLES:

AXLE POSITION NO	1	2	3	4	5	6
MAKE/	PLW	PLW	PLW	PLW	PLW	PLW
S.NO	28830	28839	28656	28766	28732	28770
Ultrasonic Testing	OK	OK	OK	OK	OK	OK

4. WHEEL DISCS NO. AND TYPE & BULL GEAR

AXLE POSITION NO	1	2	3	4	5	6
GEAR END	EOH2-030	EQ73-57	EOJ3-076	EQG7-54	ERE2-007	EOG7-008
Make	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED
FREE END	EQ36-063	EQ73-61	EOG8-069	EQ73-60	EOH6-047	ERE8-055
Make	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED
Bull Gear No.	24-L-17	24-M-32	24-F-1292	24-M-49	24-E-12185	24-L-05
Bull Gear Make	LMS	LMS	KPCL	LMS	KPCL	LMS

5. AXLE ROLLER BEARING (CRU) (PL No. 29010020, Warranty: As per PO/IRS conditions)

AXLE POSITION NO		1	2	3	4	5	6
Gear	MAKE	NBC	NBC	NBC	NBC	NBC	NBC
End	PO NO. & dt	02311	02311	02311	02311	02311	02311
Free	MAKE	NBC	NBC	NBC	NBC	NBC	NBC
End	PO NO. & dt	02311	02311	02311	02311	02311	02311

6. WHEEL DISC PRESSING PRESSURE IN KN: (SPECIFIED 80-105 T)

AXLE POSITION NO	1	2	3	4	5	6
BULL GEAR END	1001 KN	952 KN	88 T	909 KN	945 KN	102 T
FREE END	896 KN	854 KN	95 T	1001 KN	813 KN	100 T

Loco No. 39471

7. DIAMETER AFTER PROFILE TURNING: SPECIFIED 1092 + 5 mm - 0 mm

AXLE POSITION NO	1	2	3	4	5	6
DIA IN mm GE	1092.5	1092.5	1092.5	1092.5	1092.5	1092.5
DIA IN mm FE	1092.5	1092.5	1092.5	1092.5	1092.5	1092.5
WHEEL PROFILE GAUGE (1596±0.5mm)	OK	OK	OK	OK	OK	OK

8. SUSPENSION TUBE & ITS TAPER ROLLER BEARING:

AXLE POSITION	NO	1	2	3	4	5	6
S.T. PL 29100288	MAKE	KPE	KPE	KPE	KPE	KPE	KPE
GE Brg. PL 29030110	MAKE	SKF	SKF	NBC	SKF	SKF	SKF
FE Brg. PL 29030110	MAKE	SKF	SKF	NBC	SKF	SKF	SKF

9. GEAR CASE (PL No. 29030018) & BACKLASH:

AXLE POSITION NO	1	2	3	4	5	6
MAKE	KPE	KPE	KPE	KPE	KPE	KPE
BACKLASH (0.254 – 0.458mm)	0.280	0.300	0.290	0.300	0.290	0.260

10 A/BOX TO BOGIE FRAME LATERAL CLEARANCES (SPECIFIED 15.0 to 19.0mm):

AXLE POSITION NO	1	2	3	4	5	6
RIGHT SIDE	16.33	16.15	15.92	18.10	17.56	15.58
LEFT SIDE	15.56	15.53	16.12	15.80	15.73	15.84

11. TRACTION MOTOR: (PL No.29942007, Warranty: As per PO/IRS conditions)

AXLE POSITION NO	MAKE	PO No. & date	S. NO.
1	TITAGARH	102213	6FRA24433
2	TITAGARH	102213	6FRA24436
3	TITAGARH	102213	6FRA24434
4	CGL	102027	2232006-7353
5	TITAGARH	102213	6FRA24430
6	PIONEER	102028	318A250185

JE/SSE/ Bogie Shop

Date and Time.......:Dt:22/4/2025 Tm:10:45

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7


Operator Name/Code: CK MISHRA

Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....Frame No: ASC41 *

(A-Scan)

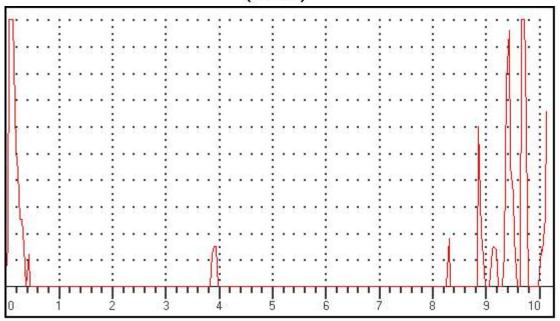

Gain: 41.0 dB RANGE: 2500.00mm MTL VEL: 5920 M/S REJECT: 12 % DELAY: 0.06mm

Data Setup

PROBE ZERO: 8.78us MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 % Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC42 *

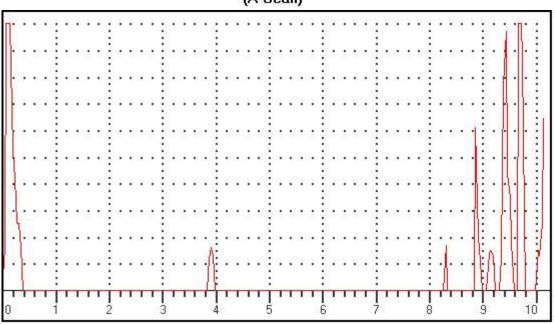

Data Setup Gain: 41.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

Gate 2(Depth): mm

Gate 2(Surface Distance): mm


Observation/Remarks (If Any):

THICK: 100.00mm

Date and TimeDt:22/4/2025 Tm:10:46	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28830	Axle/wheel No:WAP7
Operator Name/Code : CK MISHRA	
Defect LocationGE	
Test Results (Pass/Fail <u>/other):</u>	

If other, then Remarks.....

Frame No: ASC43 *

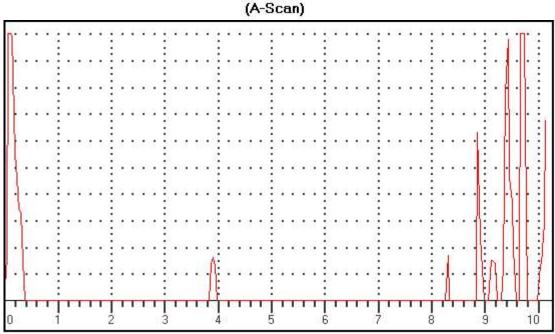

Data Setup Gain: 41.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): Gate 2(Beam Path): mm PROBE ANGLE: 0.0DEG THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:10:46

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7


Operator Name/Code: CK MISHRA

Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....Frame No: ASC44 *

(A-Scan)

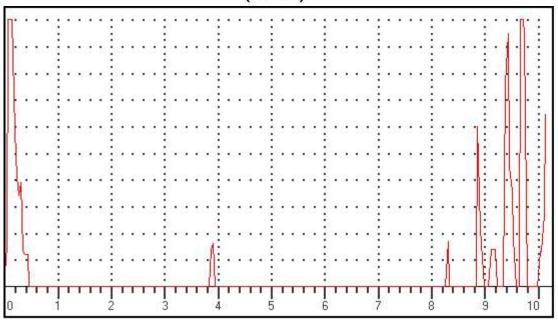

Data Setup Gain: 41.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

Gate 2(Depth): mm

Gate 2(Surface Distance): mm

Observation/Remarks (If Any):

THICK: 100.00mm

Date and Time......:Dt:22/4/2025 Tm:10:47 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC45 *

(A-Scan)

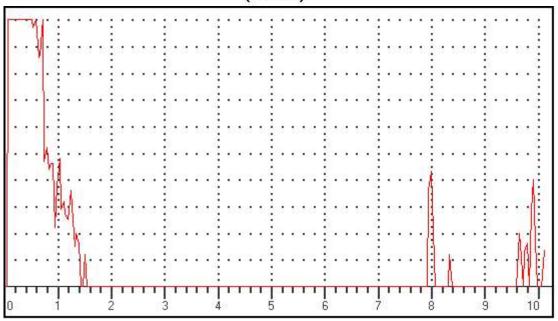

Data Setup

Gain: 52.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:22/4/2025 Tm:10:48
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC46 *

(A-Scan)

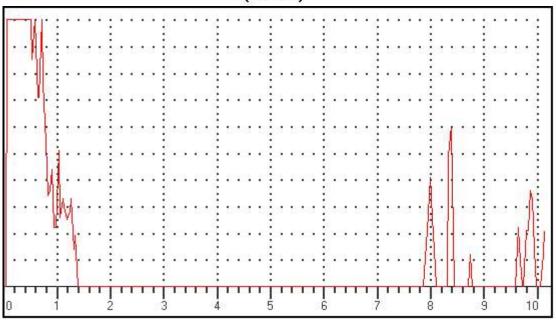

Data Setup

Gain: 52.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

I NODE ANGLE. 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:22/4/2025 Tm:10:48 UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel: 28830 Axle/wheel No:WAP7 Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC47 *

(A-Scan)

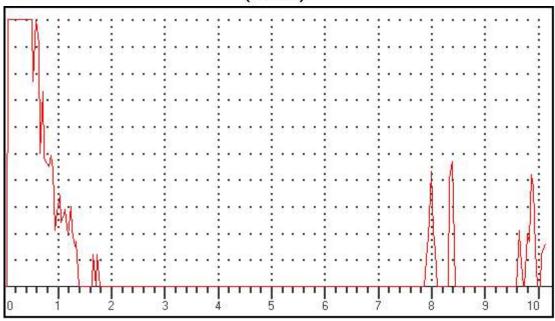

Data Setup

Gain: 52.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:10:48 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC48 *

(A-Scan)

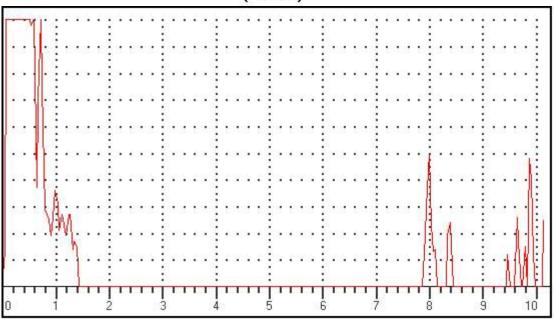

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:10:49
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC49 *

(A-Scan)

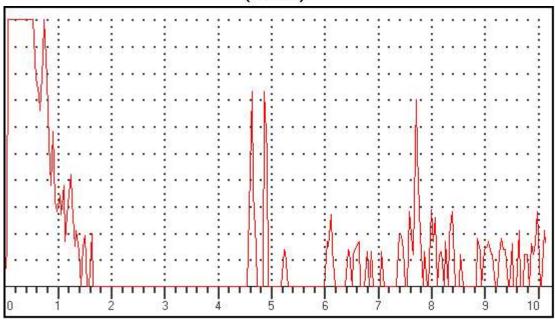

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:10:49
UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC50 *

(A-Scan)

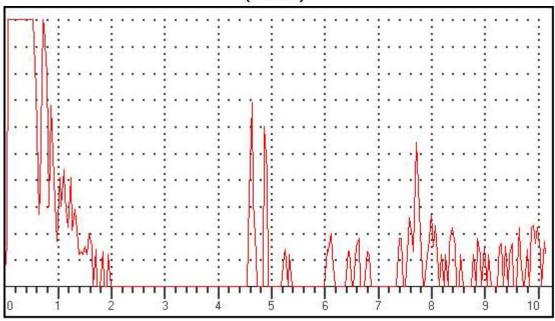

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:10:49
UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC51 *

(A-Scan)

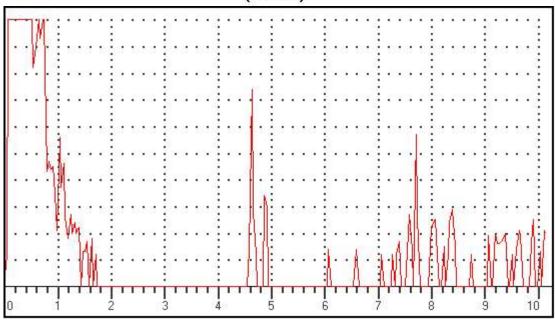

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:10:49
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC52 *

(A-Scan)

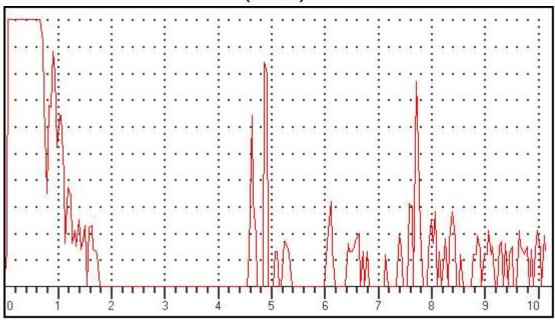

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:11:1 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC53 *

(A-Scan)

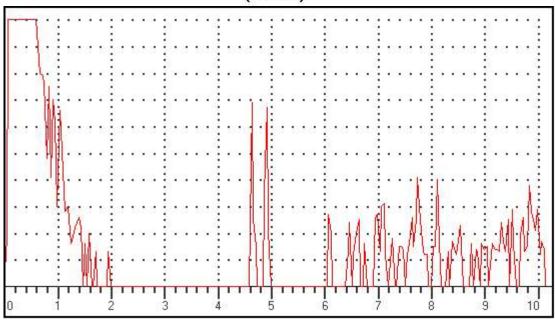

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:11:1 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC54 *

(A-Scan)

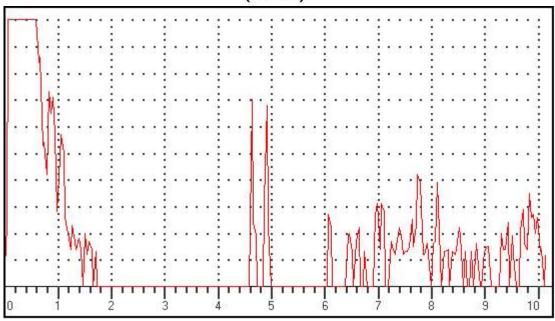

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:11:1 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC55 *

(A-Scan)

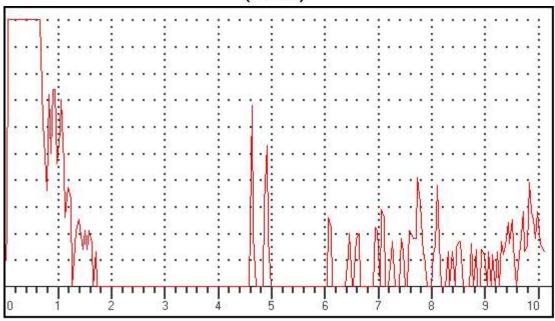

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:11:1 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC56 *

(A-Scan)

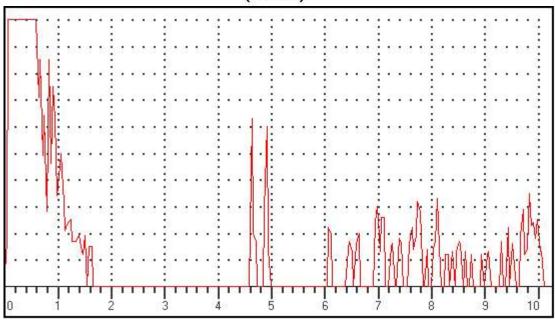

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:11:2

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7

Operator Name/Code: CK MISHRA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC57 *

(A-Scan)

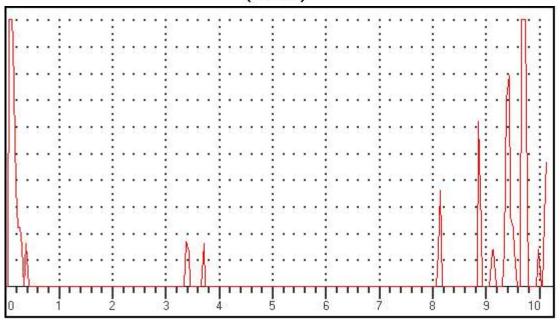

Data Setup

Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:11:2

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7


Operator Name/Code: CK MISHRA

Defect Location: FE
Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC58 *

(A-Scan)

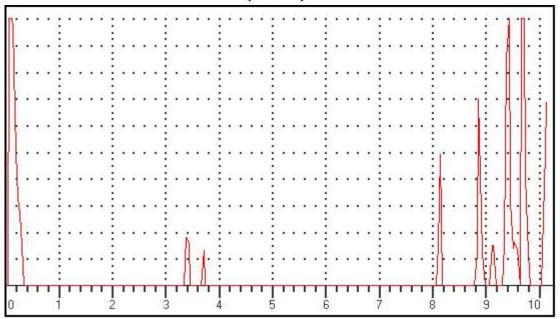

Data Setup

Gain: 38.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:11:2

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28830 Axle/wheel No:WAP7

Operator Name/Code: CK MISHRA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC59 *

(A-Scan)

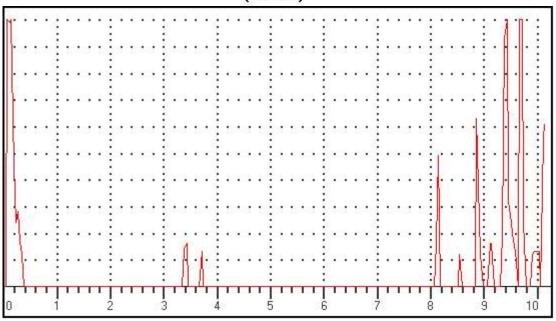

Data Setup

Gain: 38.0 dB

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm


Gate 1 (Status): OFF

Date and TimeDt:22/4/2025 Tm:11:3	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28830	Axle/wheel No:WAP7
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	

If other, then Remarks..... Frame No: ASC60 *

(A-Scan)

S.....

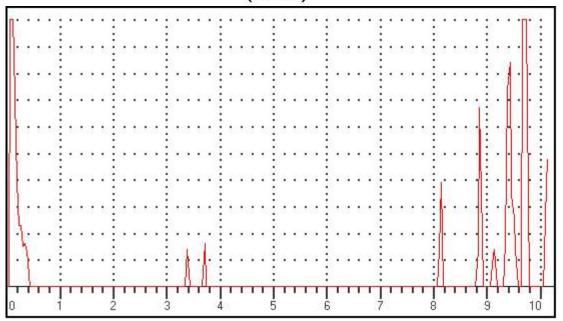

Data Setup Gain: 38.0 dB RANGE: 2500.00mm MTL VEL: 5920 M/S REJECT: 12 % DELAY: 0.06mm PROBE ZERO: 8.78us MODE: SINGLE

PROBE ANGLE: 0.0DEG THICK: 100.00mm

Gate 1 (Status): OFF Gate 2 (Status): OFF Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:9:21

UFD Model: Arya 1 (R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code: RAMVEER MEENA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC01 *

(A-Scan)

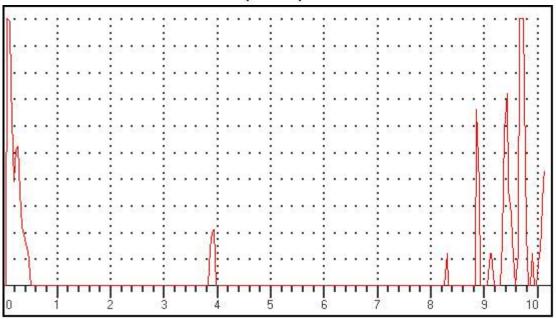

Data Setup

Gain: 37.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:9:21

UFD Model: Arya 1 (R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code: RAMVEER MEENA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC02 *

(A-Scan)

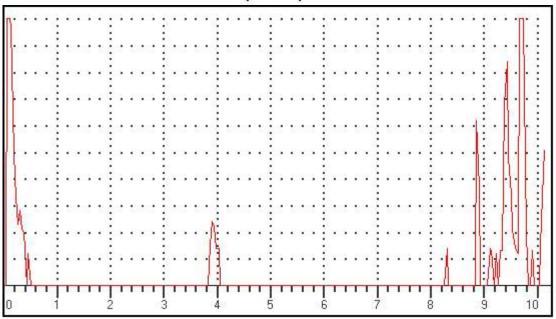

Data Setup

Gain: 39.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mn
PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm


Date and Time......Dt:22/4/2025 Tm:9:23 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel: 28839 Axle/wheel No:WAP7 Operator Name/Code : RAMVEER MEENA Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC03 *

(A-Scan)

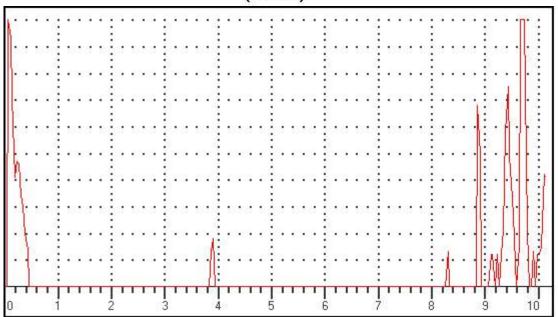

Data Setup

Gain: 38.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:9:24

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code: RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC04 *

(A-Scan)

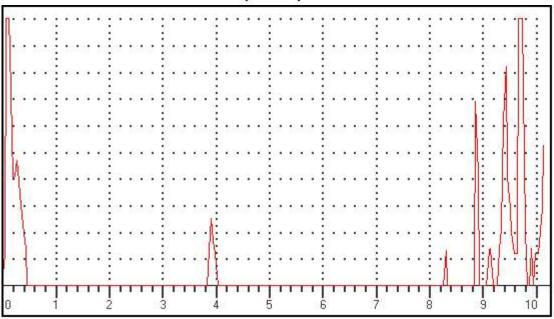

Data Setup

Gain: 38.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:24
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC05 *

(A-Scan)

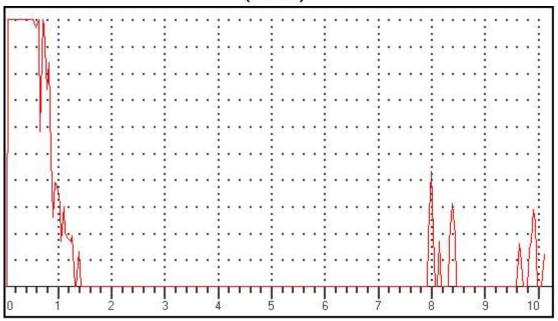

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:24
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC06 *

(A-Scan)

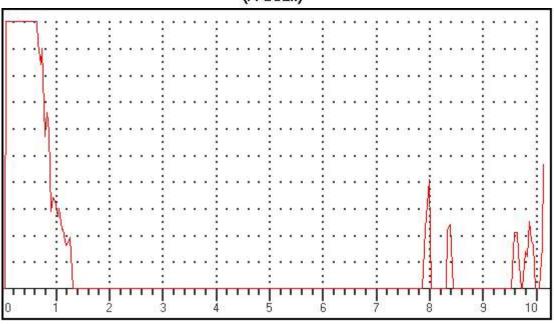

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:25 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC07 *

(A-Scan)

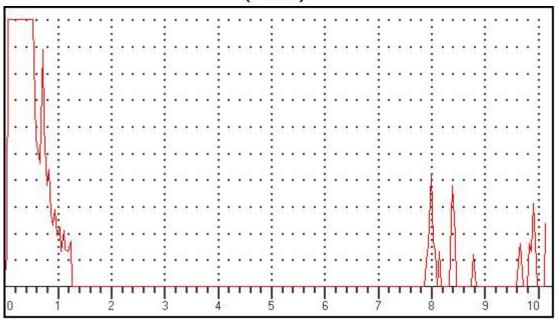

Data Setup

Gain: 45.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:25 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC08 *

(A-Scan)

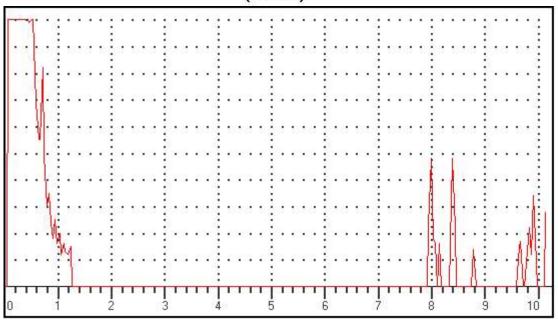

Data Setup

Gain: 45.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Date and Time......:Dt:22/4/2025 Tm:9:26
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC09 *

(A-Scan)

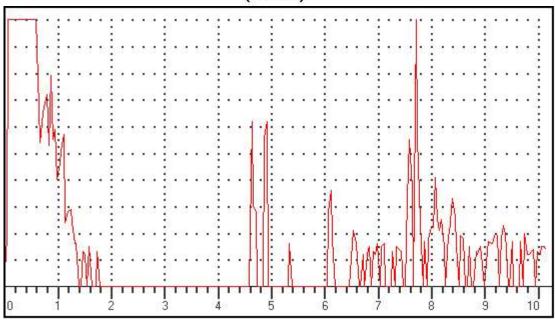

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:26
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC10 *

(A-Scan)

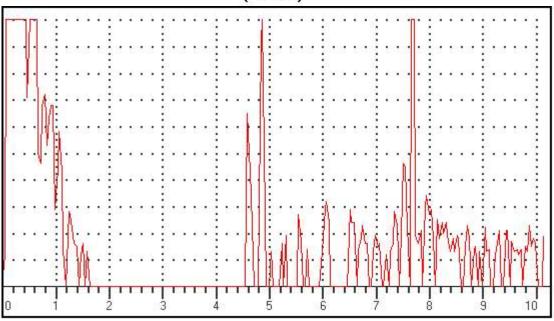

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:26
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC11 *

(A-Scan)

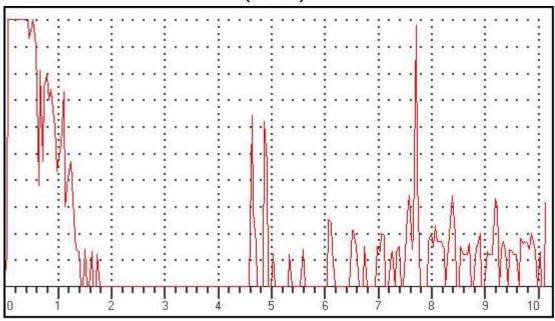

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:26
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC12 *

(A-Scan)

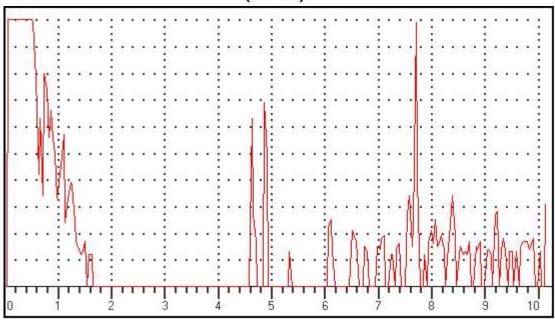

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:42 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC13 *

(A-Scan)

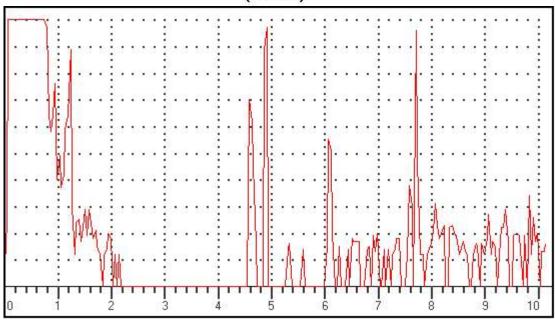

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:42 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC14 *

(A-Scan)

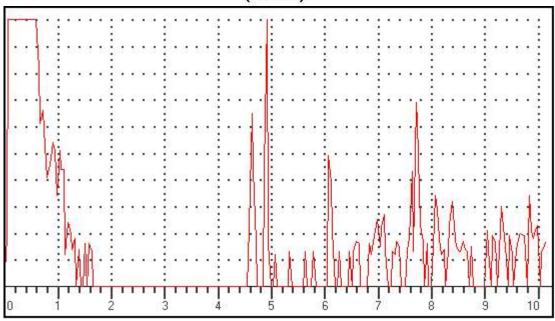

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:42 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC15 *

(A-Scan)

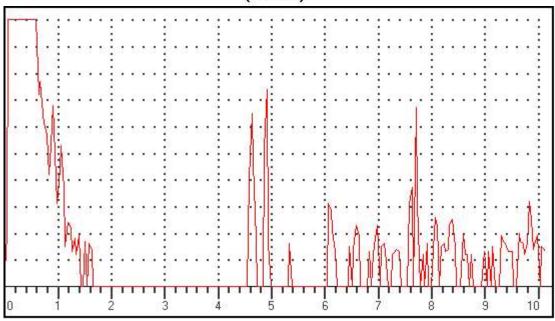

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:43 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: 28839 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC16 *

(A-Scan)

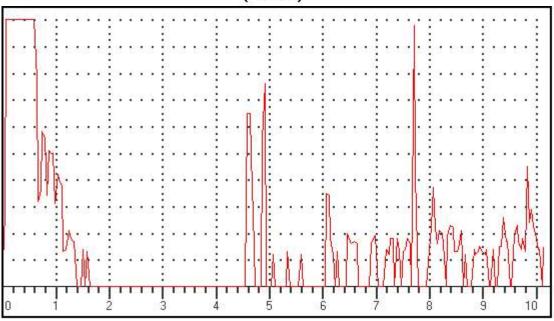

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:22/4/2025 Tm:9:43
UFD Model: Arya 1(R) Sr No:AA0362-4220
Railway/Workshop....: BS PLW
Type of Axle/wheel....: 28839 Axle/wheel No:WAP7
Operator Name/Code: RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC17 *

(A-Scan)

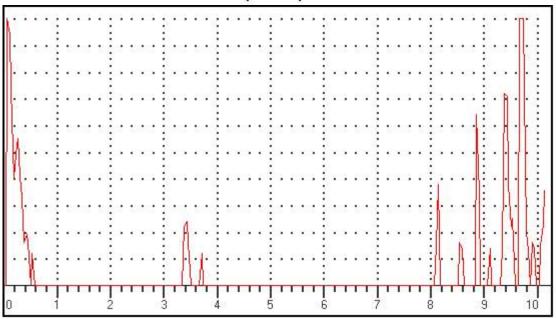

Data Setup

Gain: 38.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:9:43

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code: RAMVEER MEENA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC18 *

(A-Scan)

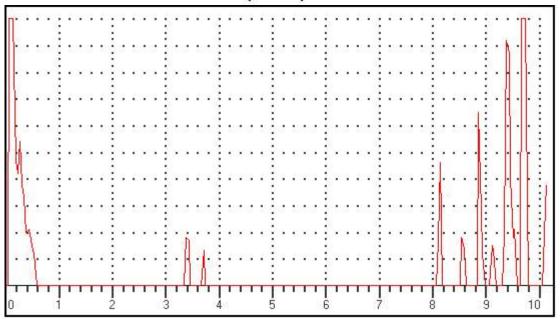

Data Setup

Gain: 38.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:9:43

UFD Model: Arya 1 (R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: 28839 Axle/wheel No:WAP7


Operator Name/Code: RAMVEER MEENA

Defect Location: FE
Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC19 *

(A-Scan)

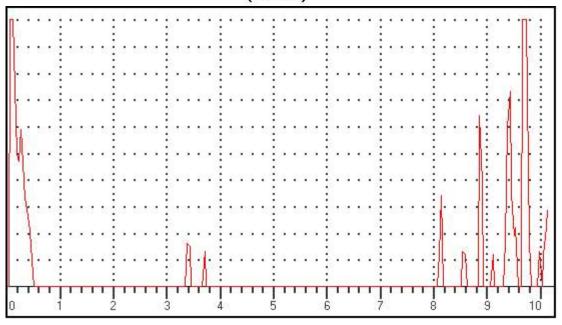

Data Setup

Gain: 38.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:22/4/2025 Tm:9:43

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28839 Axle/wheel No:WAP7

Operator Name/Code: RAMVEER MEENA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC20 *

(A-Scan)

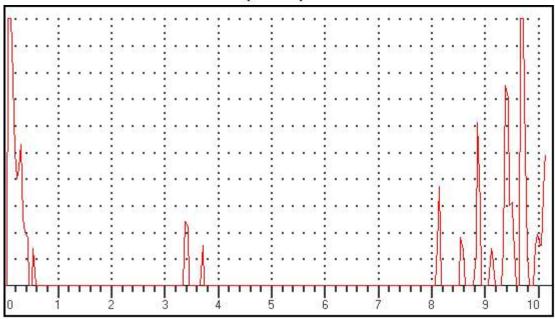

Data Setup Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8,78us MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 % Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm Gate 2(Echo height):

Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:3/4/2025 Tm:11:22	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28656	Axle/wheel No:WAP7
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC121 *

(A-Scan)

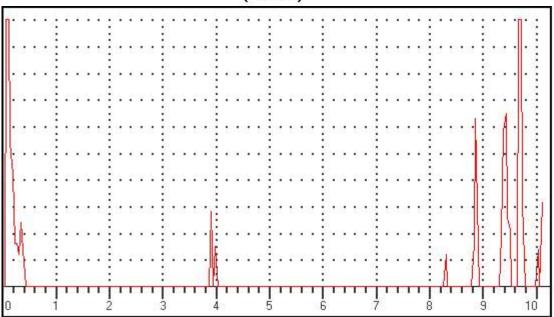


Data Setup Gain: 42.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:3/4/2025 Tm:11:22	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel 28656	Axle/wheel No:WAP7
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	

If other, then Remarks.....

Frame No: ASC122 *



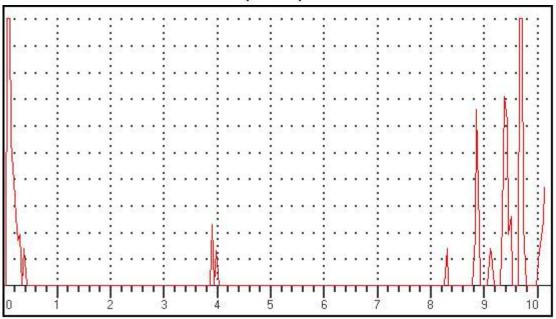

Data Setup Gain: 44.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us

Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm PROBE ANGLE: 0.0DEG Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Observation/Remarks (If Any):

MODE: SINGLE

THICK: 100.00mm

Date and Time.......:Dt:3/4/2025 Tm:11:22

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: 28656 Axle/wheel No:WAP7

Operator Name/Code: CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC123 *

(A-Scan)

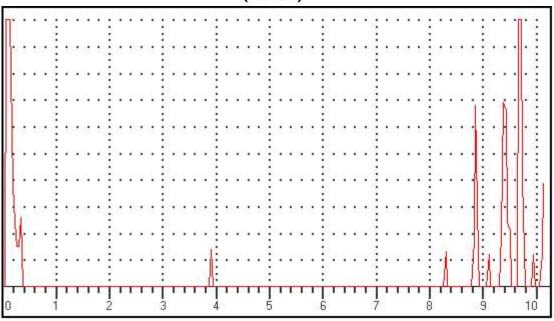

Data Setup

Gain: 44.0 dB

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Gate 1 (Status): OFF

Date and TimeDt:3/4/2025 Tm:11:23	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28656	Axle/wheel No:WAP7
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	

If other, then Remarks......Frame No: ASC124 *

(A-Scan)

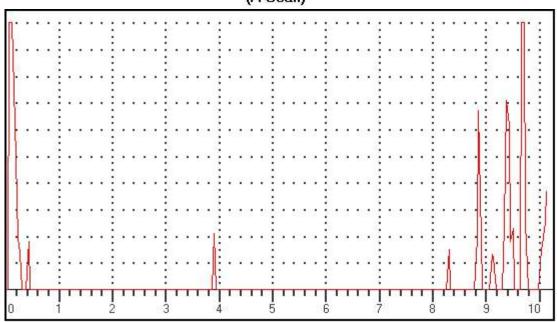

Data Setup Gain: 44.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:24 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC125 *

(A-Scan)

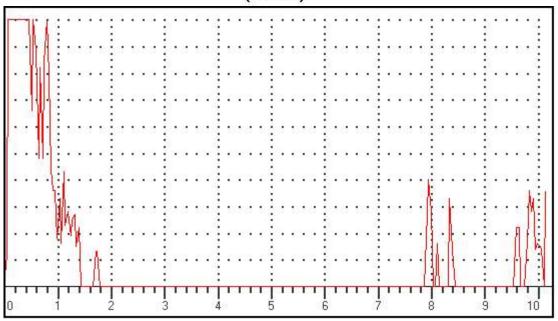

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:3/4/2025 Tm:11:24
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC126 *

(A-Scan)

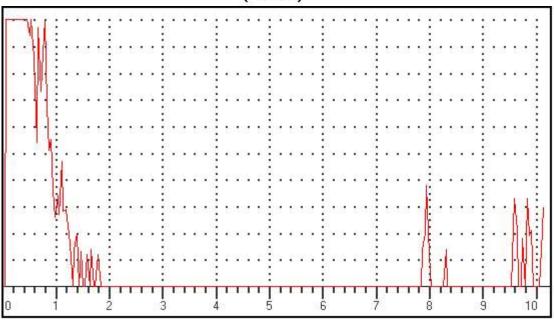

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:25 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC127 *

(A-Scan)

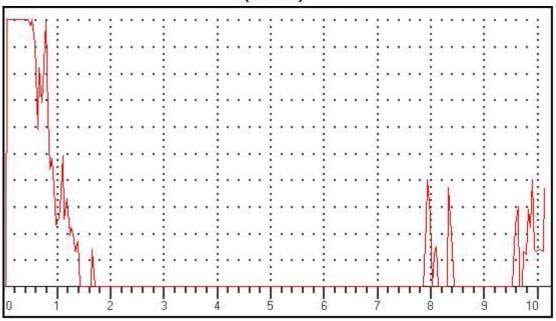

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:25 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC128 *

(A-Scan)

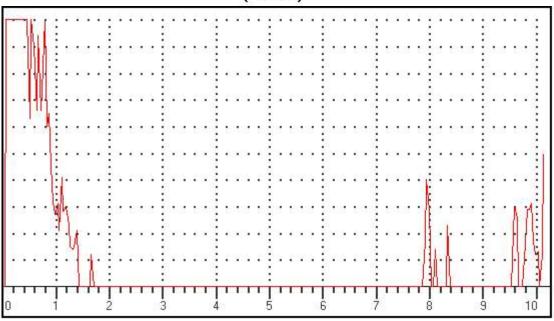

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:26 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC129 *

(A-Scan)

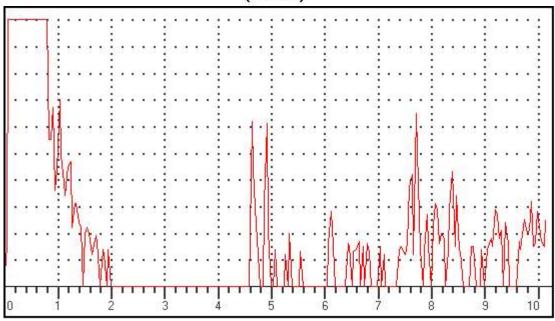

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:27 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC130 *

(A-Scan)

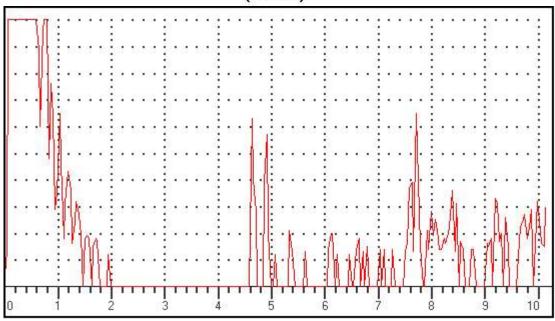

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:27
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop.....: <u>BS PLW</u>

Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC131 *

(A-Scan)

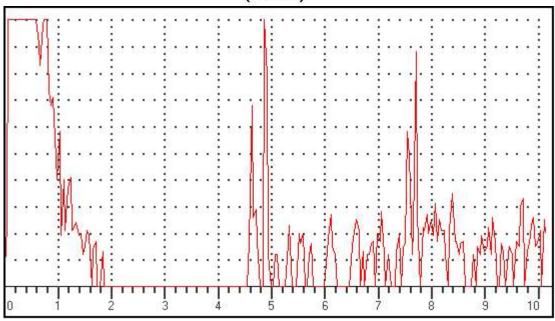

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance):

Gate 2(Surface Distance): mm Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Gate 2(Deptil). II

Date and Time.....:Dt:3/4/2025 Tm:11:27 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC132 *

(A-Scan)

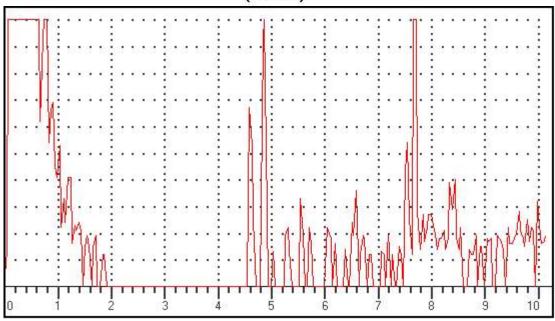

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:32 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC133 *

(A-Scan)

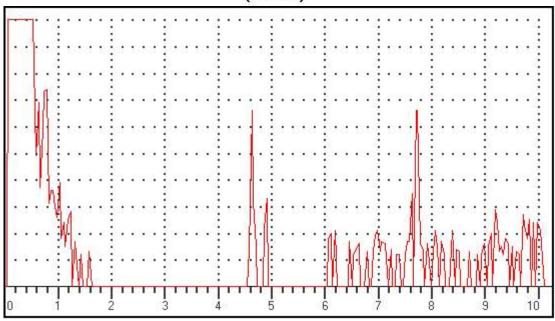

Data Setup

Gain: 46.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:3/4/2025 Tm:11:32 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC134 *

(A-Scan)

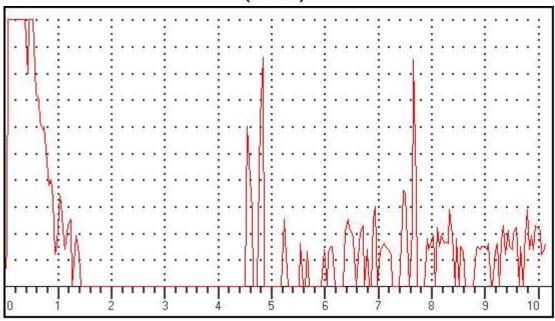

Data Setup

Gain: 46.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:33 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC135 *

(A-Scan)

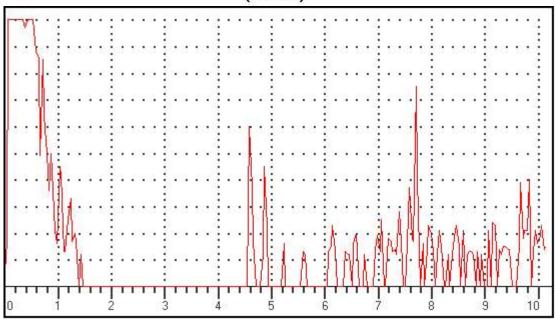

Data Setup

Gain: 46.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/4/2025 Tm:11:33 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel: 28656 Axle/wheel No:WAP7

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC136 *

(A-Scan)

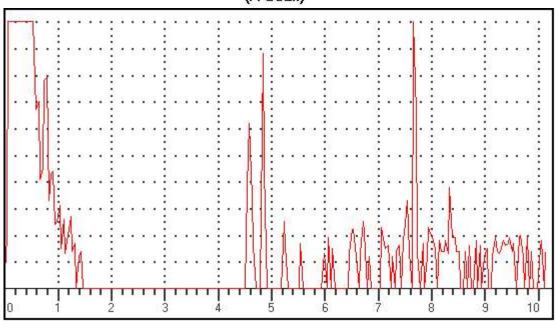

Data Setup

Gain: 46.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:3/4/2025 Tm:11:33	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28656	Axle/wheel No:WAP7
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC137 *

(A-Scan)

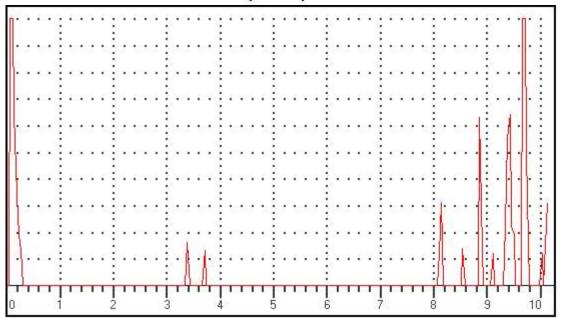

Data Setup Gain: 42.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:3/4/2025 Tm:11:34

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW


Type of Axle/wheel....: 28656 Axle/wheel No:WAP7

Operator Name/Code: CK MISHRA

Defect Location: FE

Frame No: ASC138 *

(A-Scan)

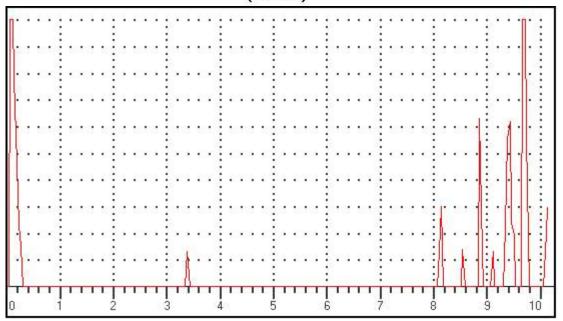

Data Setup

Gain: 42.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:3/4/2025 Tm:11:34	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28656	Axle/wheel No:WAP7
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC139 *

(A-Scan)

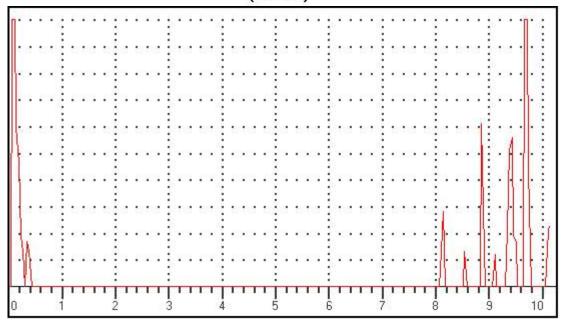


Data Setup Gain: 42.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:3/4/2025 Tm:11:34	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28656	Axle/wheel No:WAP7
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail <u>/other):</u>	

If other, then Remarks.....

Frame No: ASC140 *

(A-Scan)

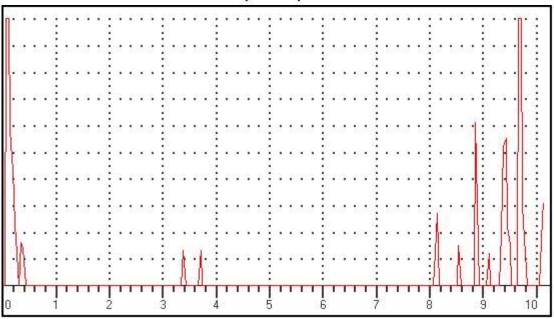

Gain: 42.0 dB RANGE: 2500.00mm MTL VEL: 5920 M/S REJECT: 12 % DELAY: 0.06mm

Data Setup

PROBE ZERO: 8,78us MODE: SINGLE

PROBE ANGLE: 0.0DEG THICK: 100.00mm Gate 1 (Status): OFF Gate 2 (Status): OFF

Gate 1(Echo height): 0 % Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:21/4/2025 Tm:12:18

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: 28766 Axle/wheel No:WAP7


Operator Name/Code: RAMYEER MEENA

Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks......Frame No: ASC141 *

(A-Scan)

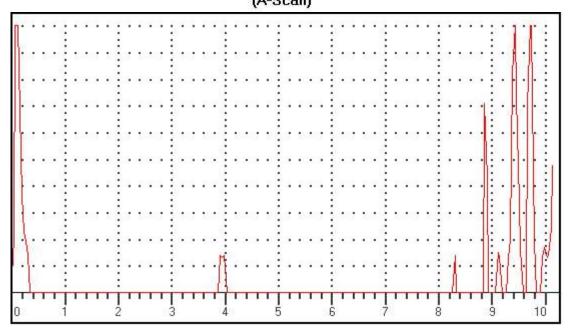

Data Setup

Gain: 38.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm


THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:21/4/2025 Tm:12:18	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28766	Axle/wheel No:WAP7
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail <u>/other):</u>	
If other, then Remarks	

Frame No: ASC142 *


(A-Scan)

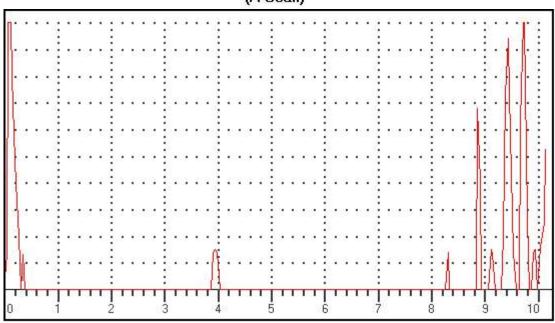

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): Gate 2(Beam Path): mm PROBE ANGLE: 0.0DEG THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop: BS PLW Type of Axle/wheel: 28766 Axle/wheel No:WAP7 Operator Name/Code: RAMVEER MEENA Defect Location: GE Test Results (Pass/Fail/other): If other, then Remarks	Date and TimeDt:21/4/2025 Tm:12:18	
Type of Axle/wheel: 28766 Axle/wheel No:WAP7 Operator Name/Code: RAMVEER MEENA Defect Location: GE Test Results (Pass/Fail/other): If other, then Remarks	UFD Model: Arya 1(R) Sr No:AA0362-4220	
Operator Name/Code : RAMVEER MEENA Defect Location: GE Test Results (Pass/Fail/other): If other, then Remarks	Railway/Workshop: BS PLW	
Defect Location GE Test Results (Pass/Fail/other): If other, then Remarks	Type of Axle/wheel 28766	Axle/wheel No:WAP7
Test Results (Pass/Fail <u>/other):</u> If other, then Remarks	Operator Name/Code : RAMVEER MEENA	
If other, then Remarks	Defect Location GE	
	Test Results (Pass/Fail/other):	
Frame No: ASC143 *	If other, then Remarks	
	Frame No: ASC143 *	

(A-Scan)

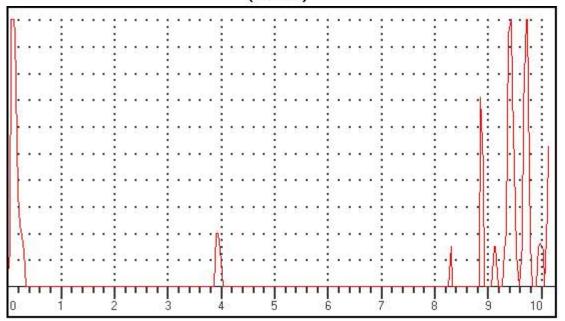


Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:21/4/2025 Tm:12:18	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28766	Axle/wheel No:WAP7
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC144 *

(A-Scan)

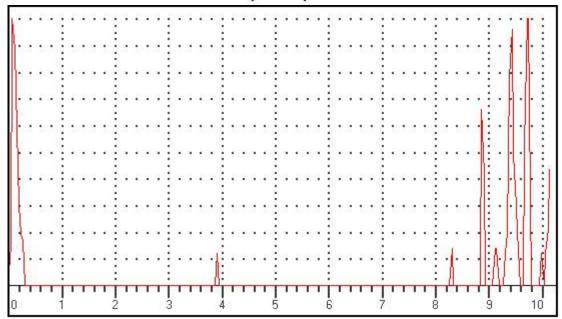

Data Setup Gain: 36.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:21/4/2025 Tm:12:20 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC145 *

(A-Scan)

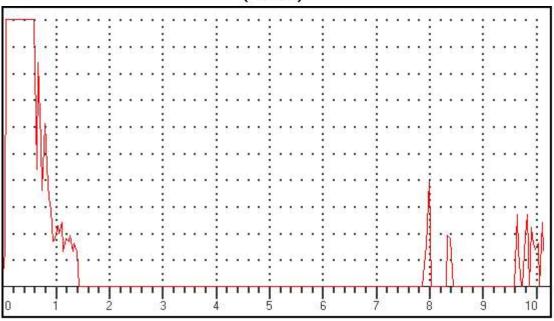

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:21/4/2025 Tm:12:20 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC146 *

(A-Scan)

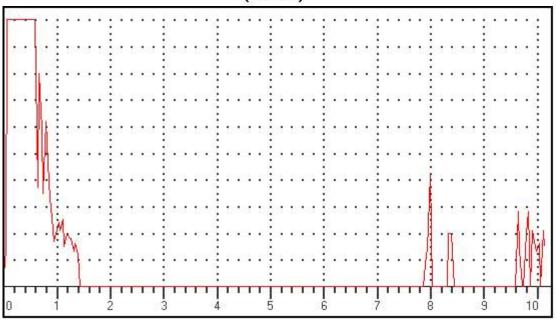

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:21/4/2025 Tm:12:21
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC147 *

(A-Scan)

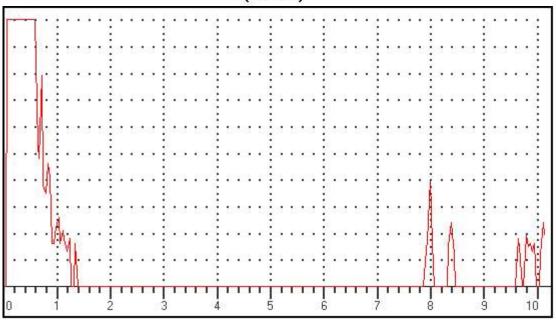

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:21/4/2025 Tm:12:21 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC148 *

(A-Scan)

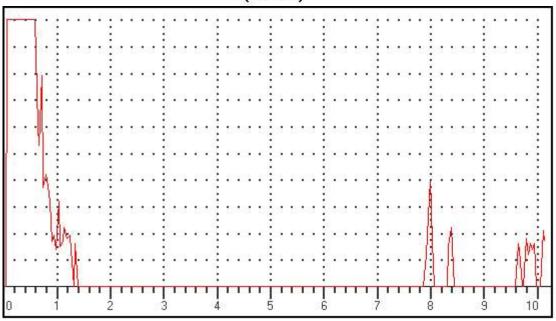

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:21/4/2025 Tm:12:21
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC149 *

(A-Scan)

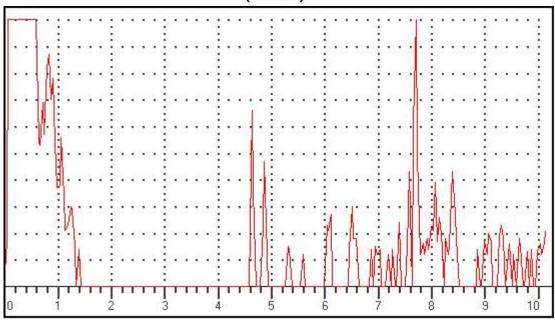

Data Setup

Gain: 52.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:21/4/2025 Tm:12:21 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC150 *

(A-Scan)

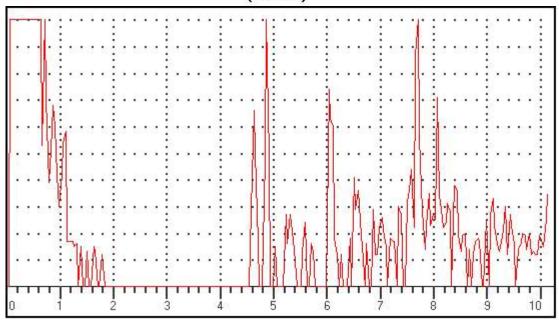

Data Setup

Gain: 52.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:21/4/2025 Tm:12:22 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC151 *

(A-Scan)

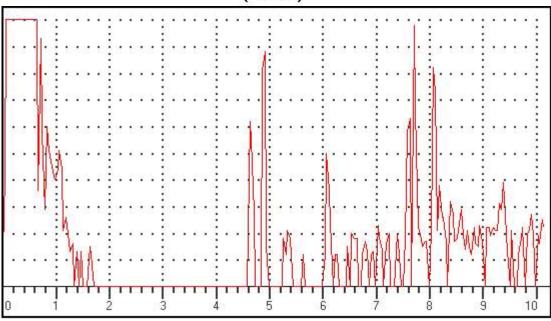

Data Setup

Gain: 52.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:21/4/2025 Tm:12:22 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC152 *

(A-Scan)

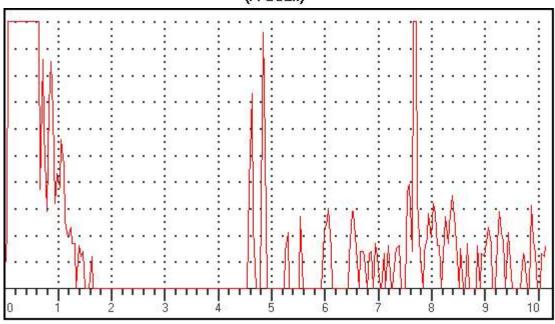

Data Setup

Gain: 52.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:21/4/2025 Tm:12:27 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel.....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC153 *

(A-Scan)

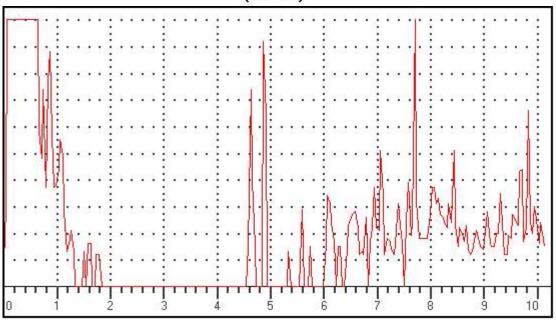

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:21/4/2025 Tm:12:27 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC154 *

(A-Scan)

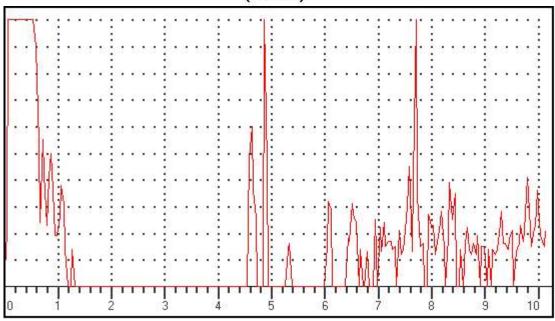

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:21/4/2025 Tm:12:27 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC155 *

(A-Scan)

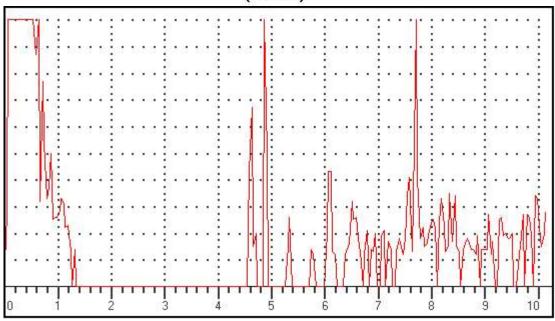

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:21/4/2025 Tm:12:27
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC156 *

(A-Scan)

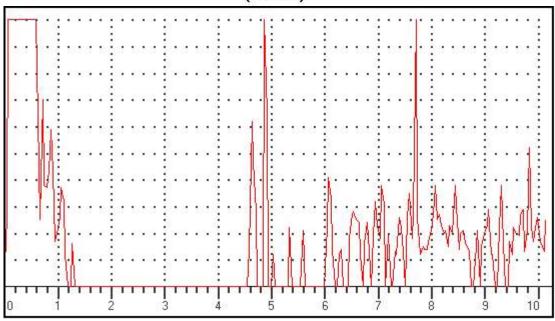

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:21/4/2025 Tm:12:28

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: 28766 Axle/wheel No:WAP7

Operator Name/Code: RAMVEER MEENA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC157 *

(A-Scan)

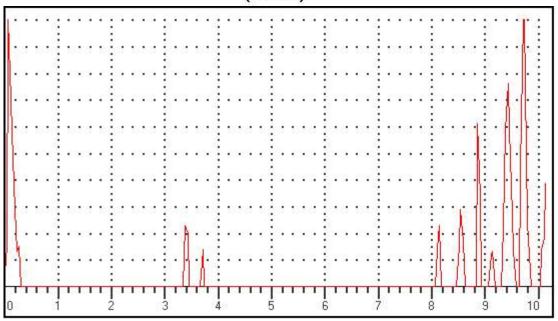

Data Setup

Gain: 36.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:21/4/2025 Tm:12:28

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: 28766 Axle/wheel No:WAP7

Operator Name/Code: RAMVEER MEENA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC158 *

(A-Scan)

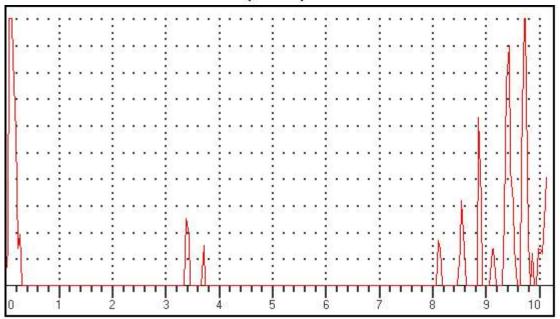

Data Setup

Gain: 36.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):


PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:21/4/2025 Tm:12:29	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: 28766	Axle/wheel No:WAP7
Operator Name/Code : RAMVEER MEENA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other than Demarks	

(A-Scan)

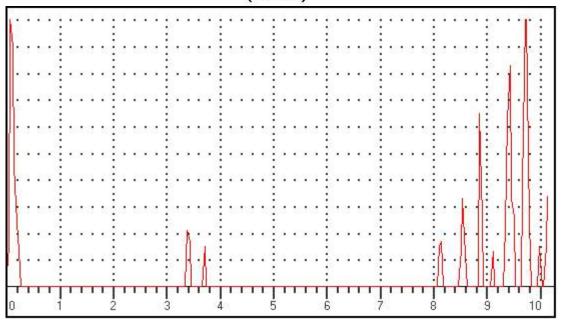

Data Setup Gain: 37.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Observation/Remarks (If Any):


Frame No: ASC159 *

Date and Time......Dt:21/4/2025 Tm:12:29 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel: 28766 Axle/wheel No:WAP7 Operator Name/Code : RAMVEER MEENA Defect Location FE

Test Results (Pass/Fail/other): If other, then Remarks.....

Frame No: ASC160 *

(A-Scan)

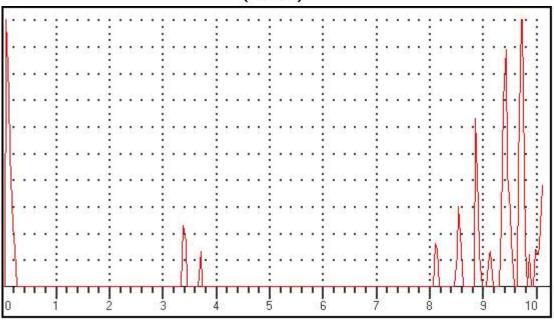

Data Setup

Gain: 35.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm


Gate 2(Depth): mm




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 27.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

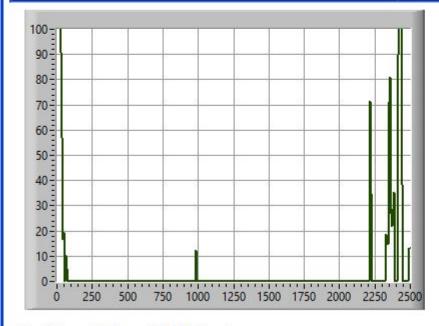

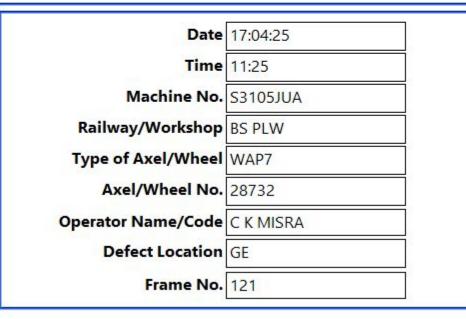


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 27.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

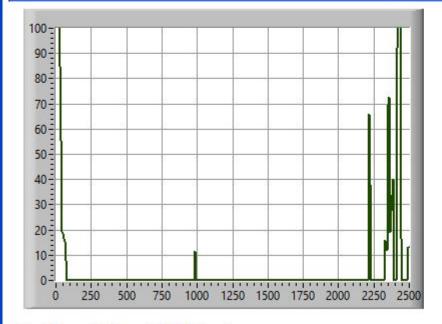

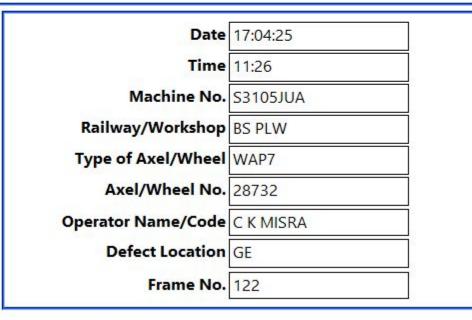


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Param	neters		Gate Measure				
Gain	: 27.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

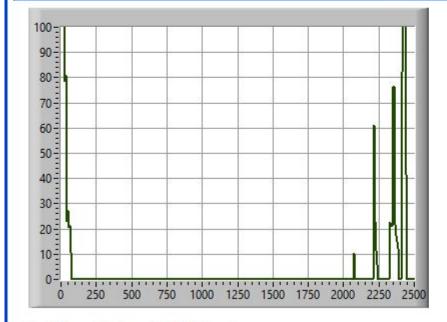

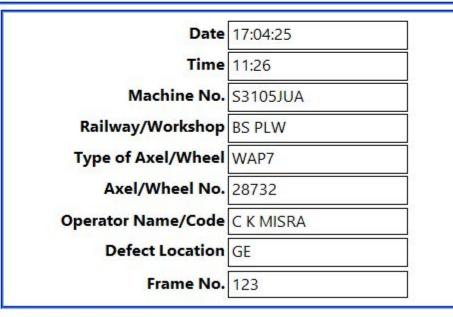


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 27.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

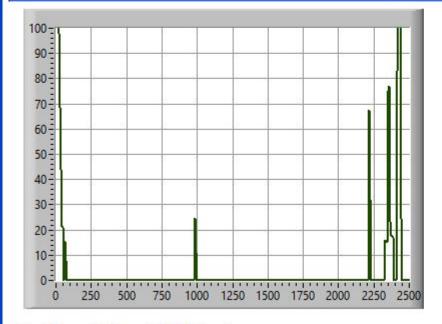

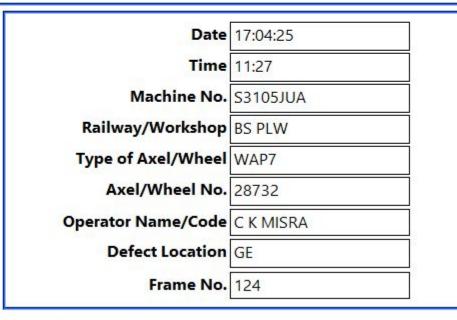


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

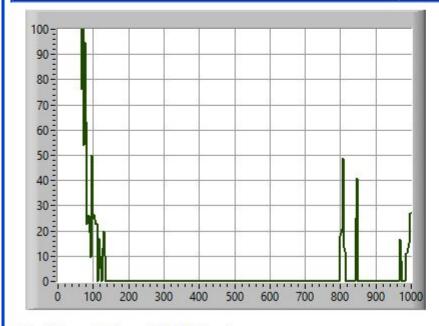

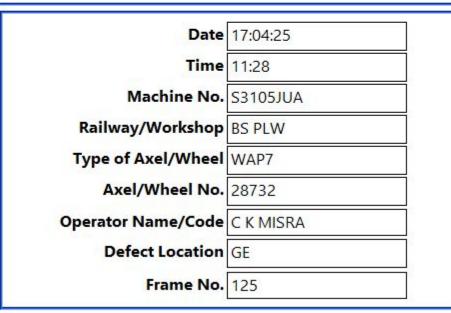


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

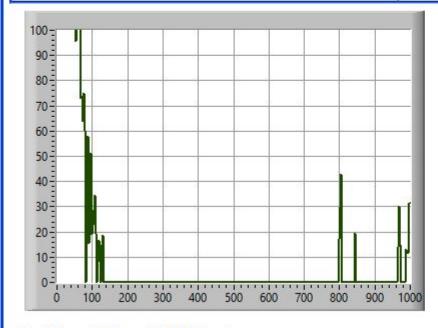

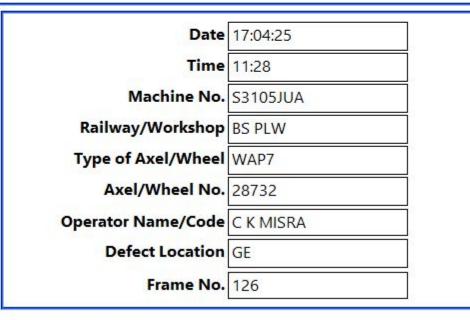


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

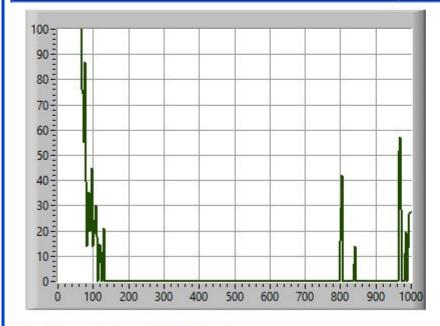

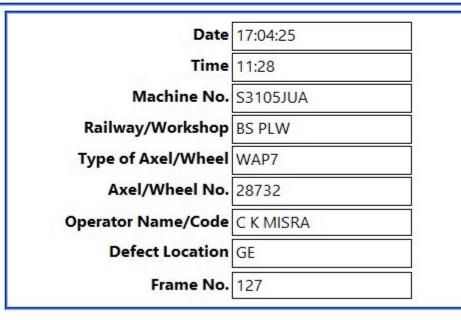


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM **INSTRUMENT VER: 0000**

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

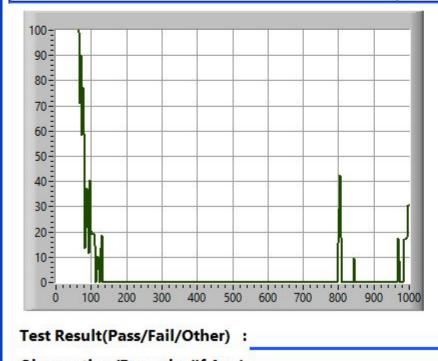

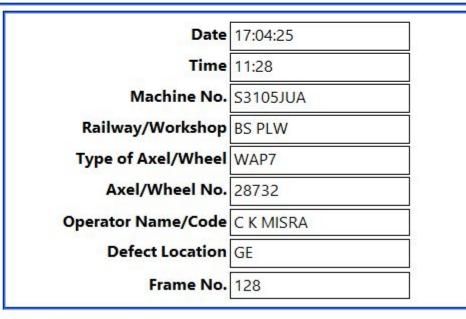


If Other, then Remarks:




DATE: 19-Apr-25 **TIME:** 9:21 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

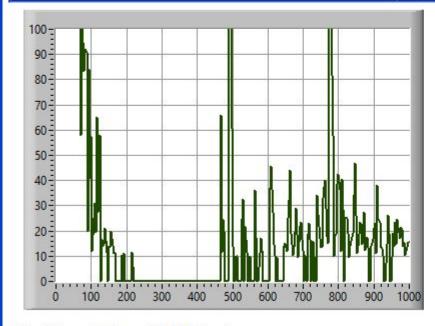

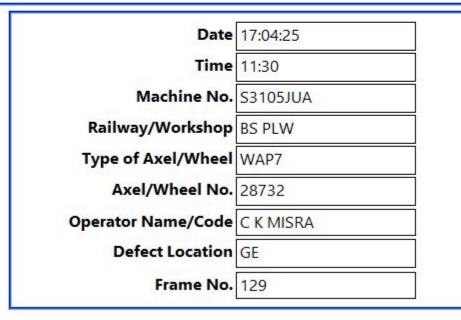


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

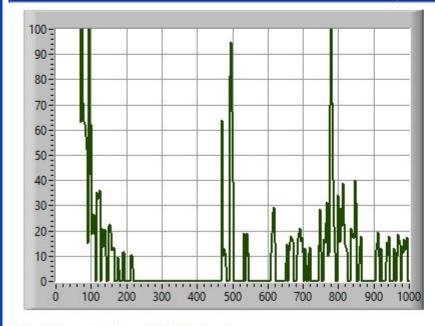

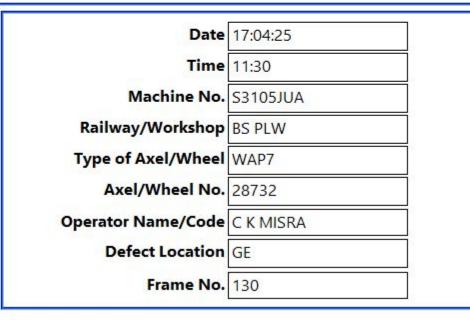


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

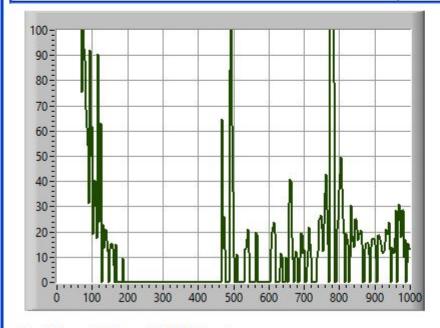

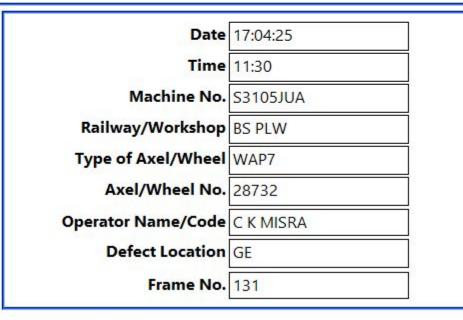


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

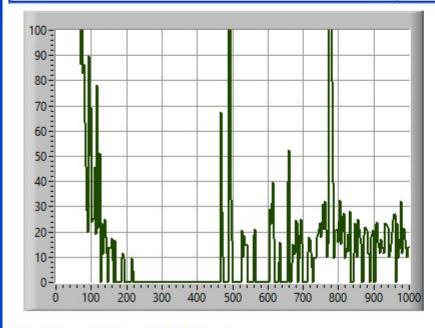

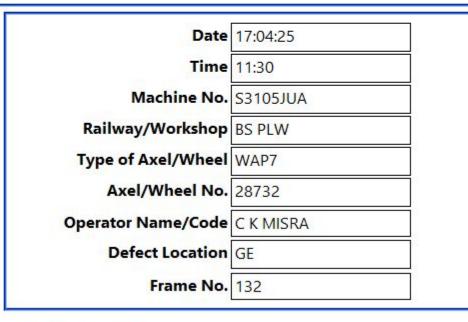


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 48.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

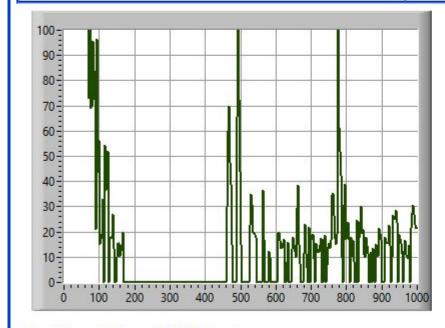

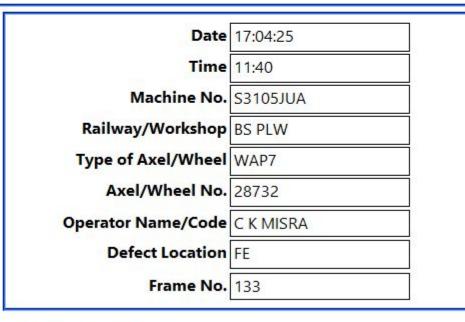


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 48.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

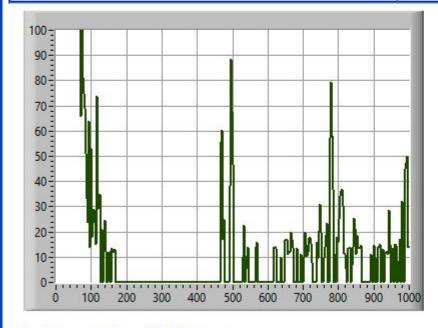

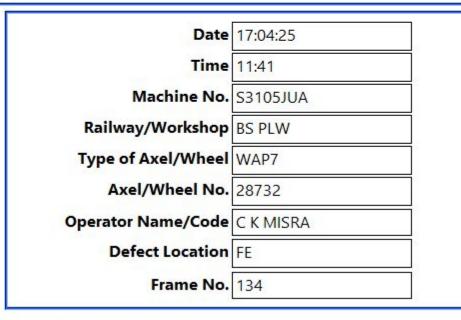


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 48.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

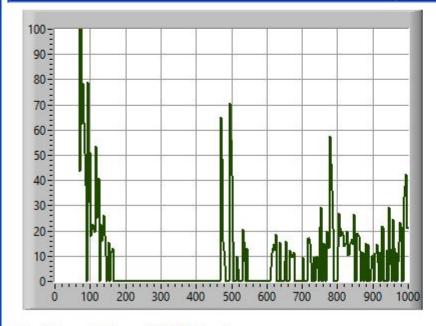

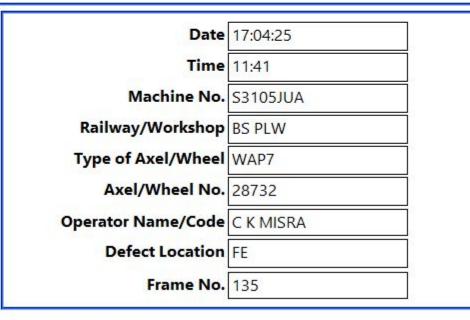


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 48.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

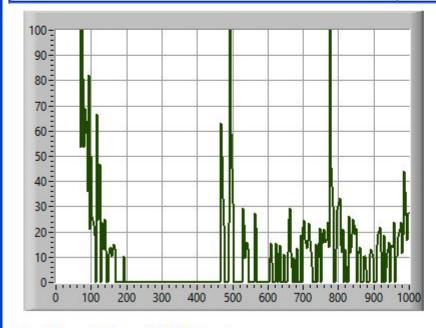

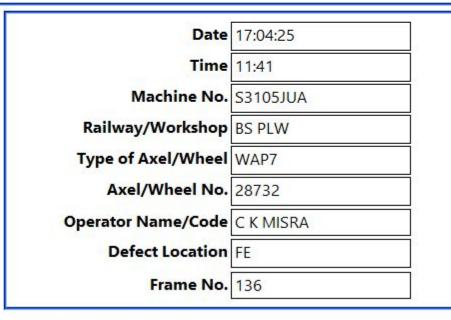


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Param	neters		Gate Measure				
Gain	: 23.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

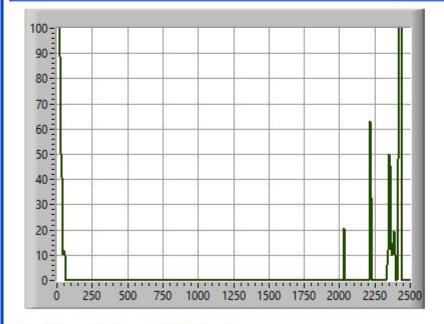

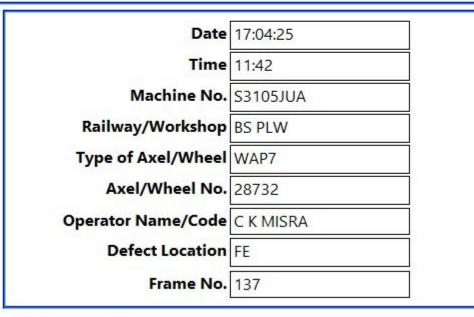


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 23.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

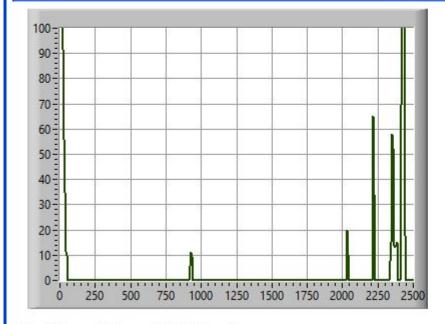

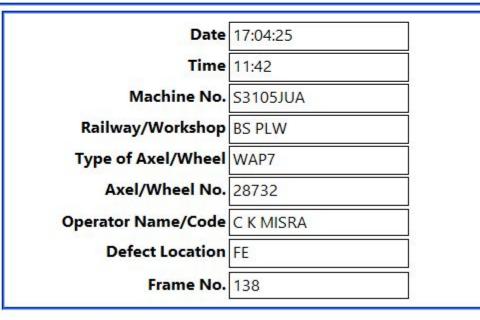


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 23.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

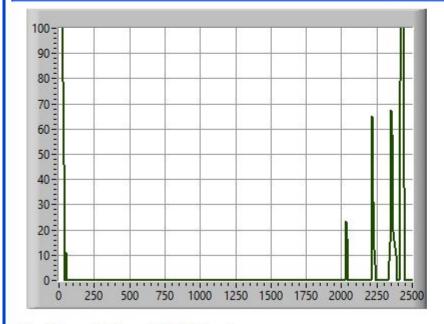

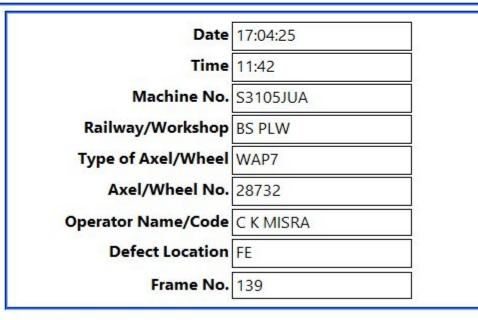


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 23.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

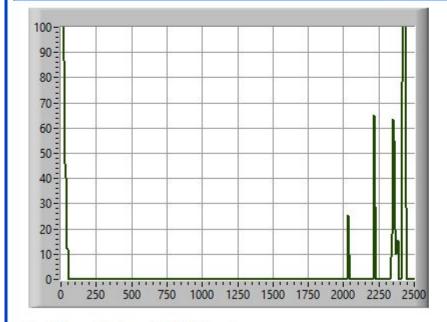

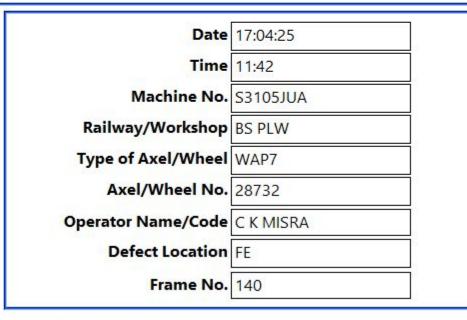


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 27.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

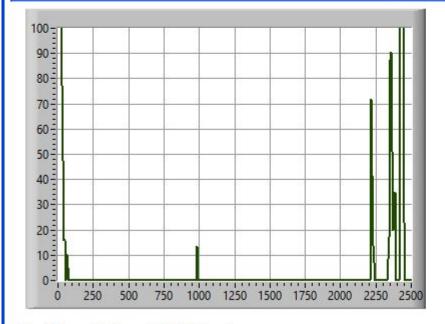

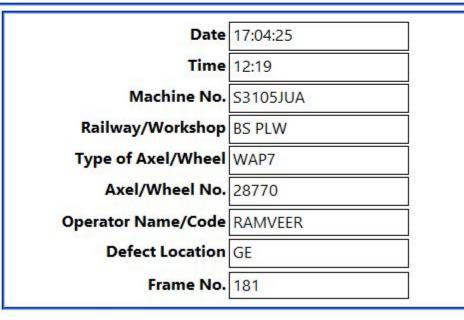


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 27.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

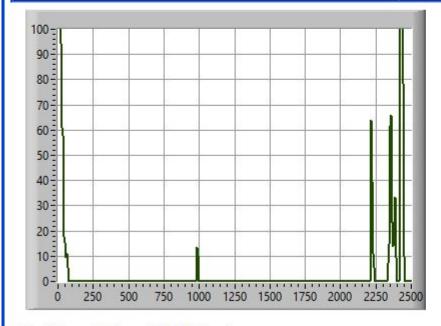

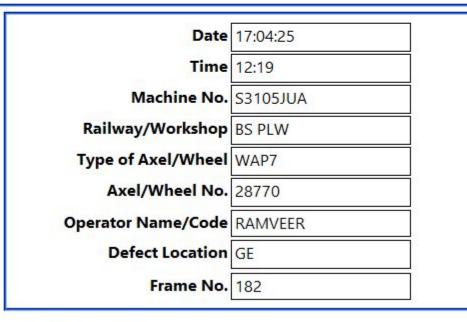


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 27.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

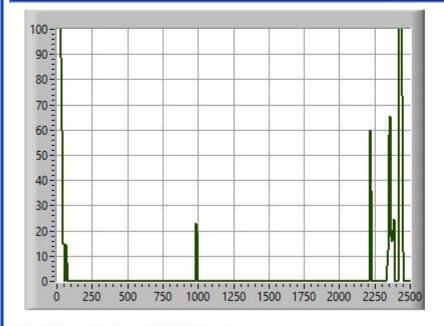

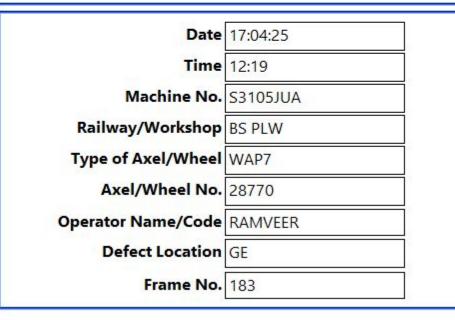


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 27.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

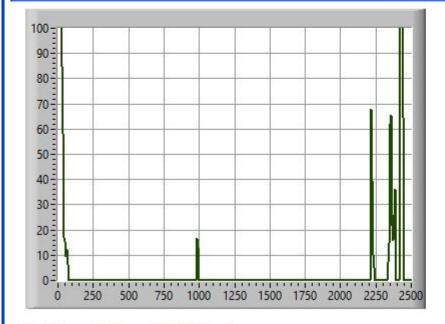

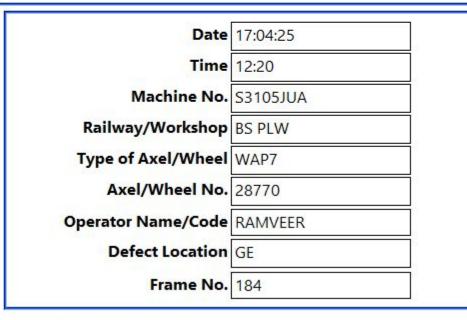


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

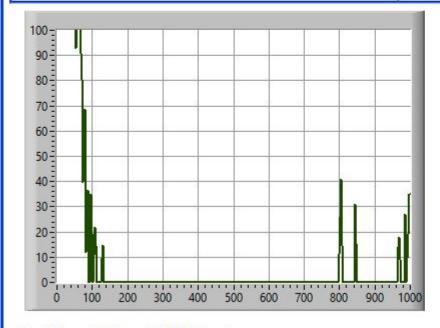

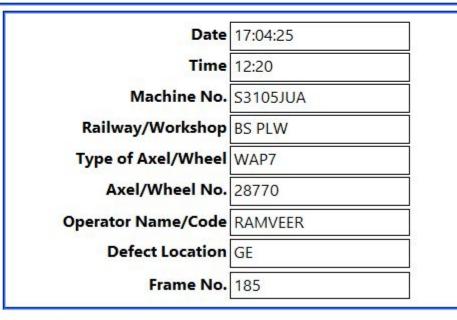


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

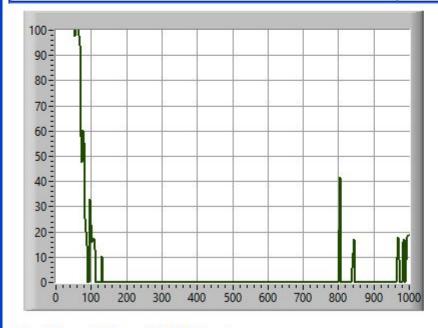

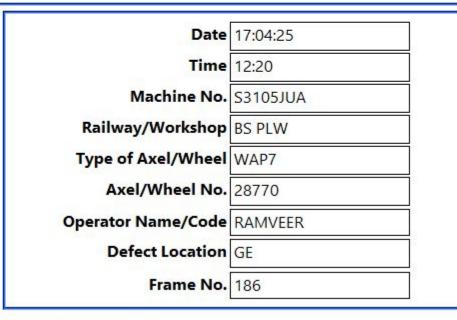


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

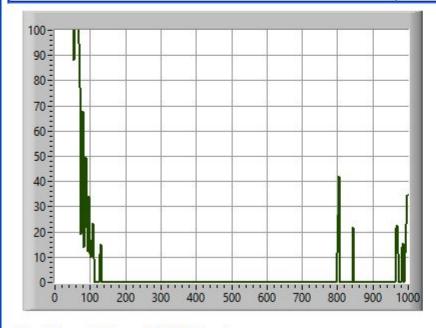

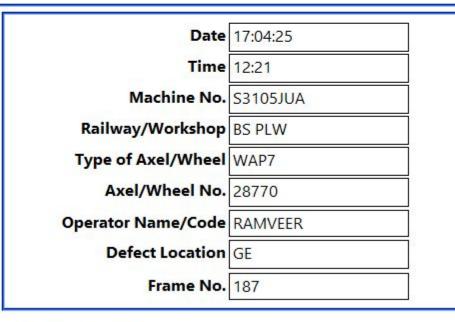


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

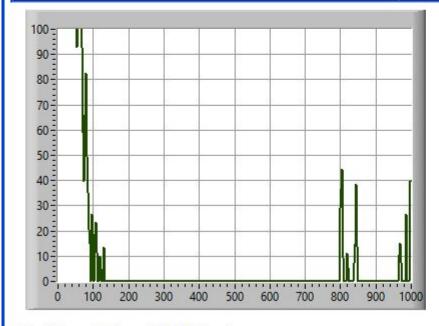

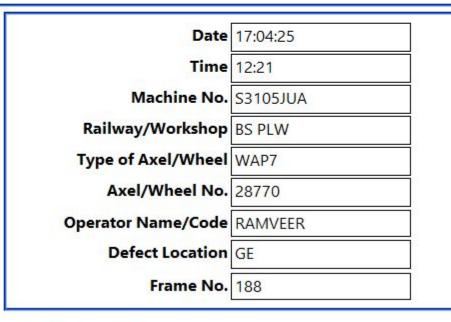


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 54.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

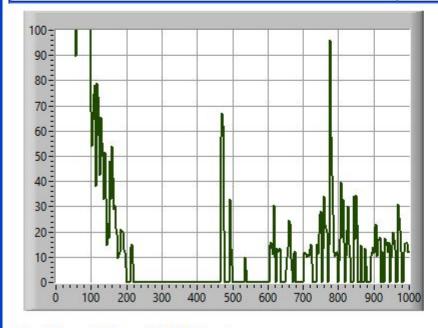

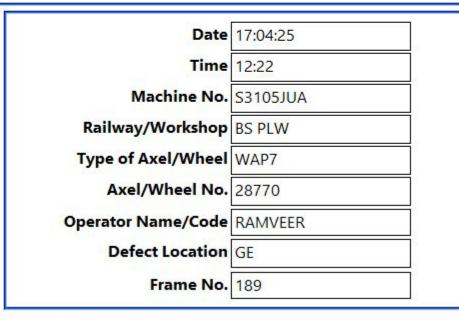


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 54.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

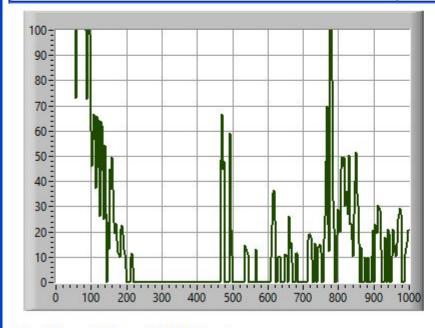

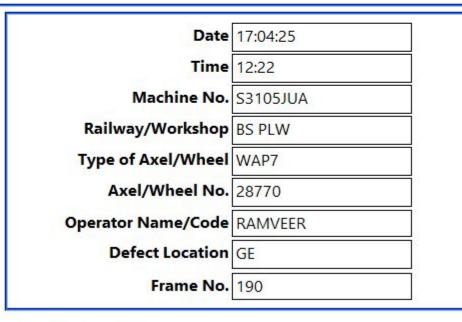


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 54.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

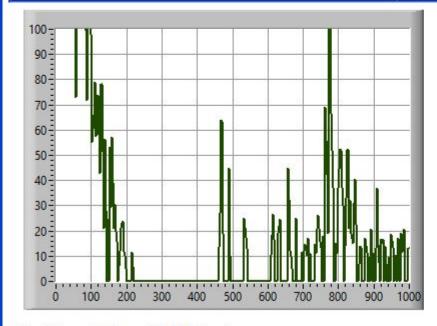

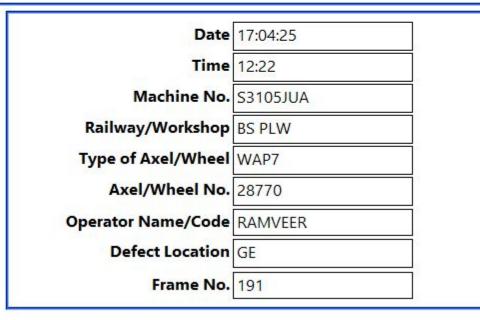


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 54.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

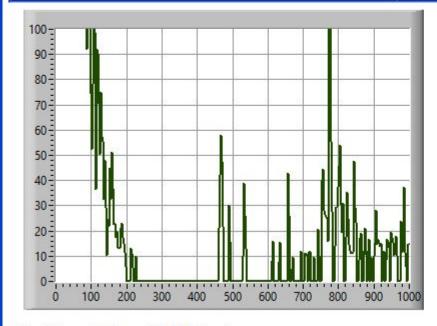

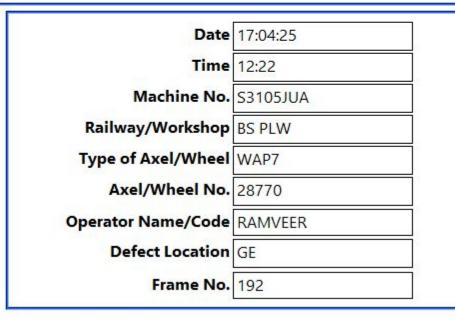


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

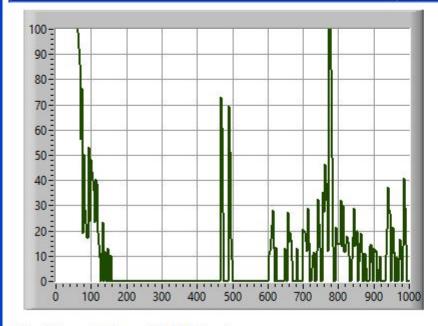

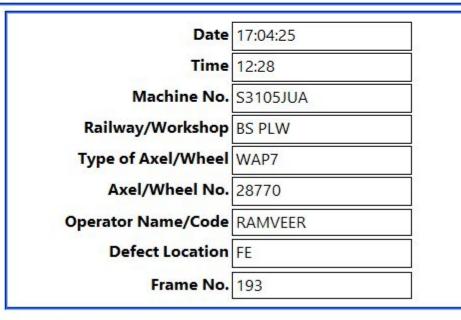


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

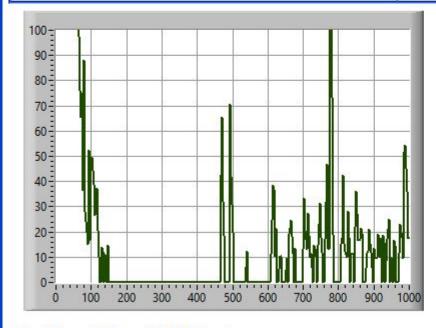

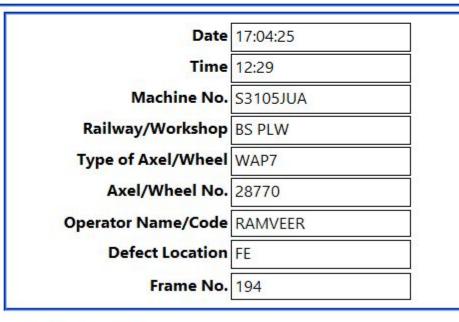


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

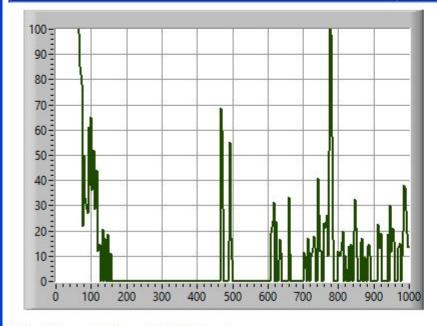

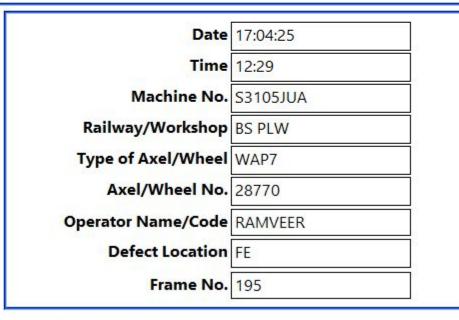


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

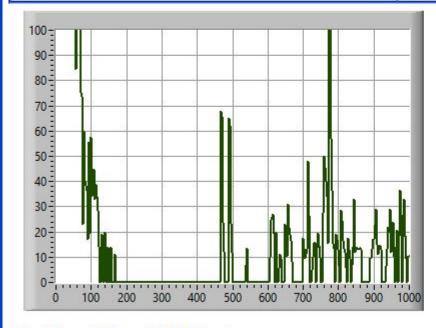

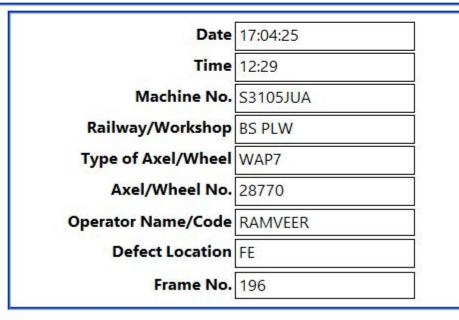


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 26.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

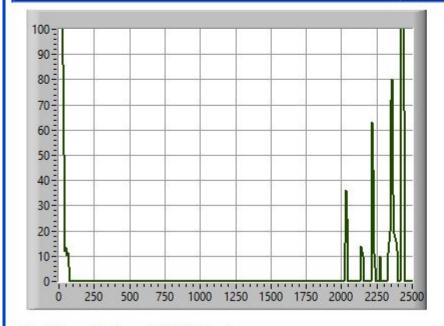

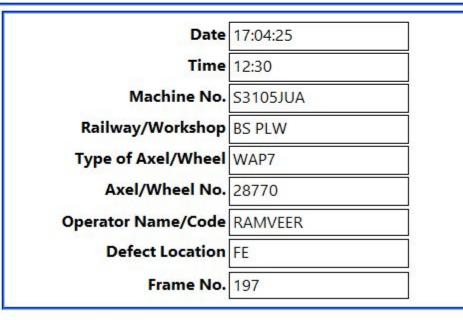


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 26.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

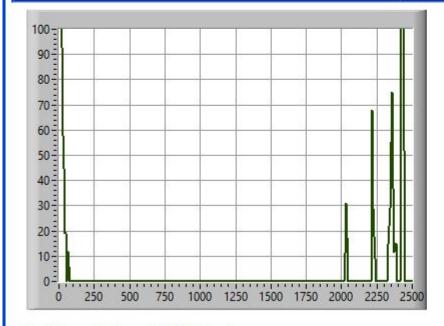

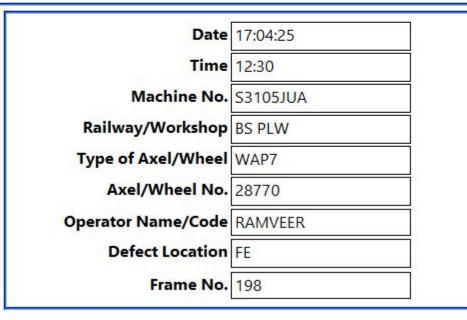


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Param	neters		Gate Measure			
Gain	: 26.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %
Velosity	: 5910 m/sec	Probe Angle	: 0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm

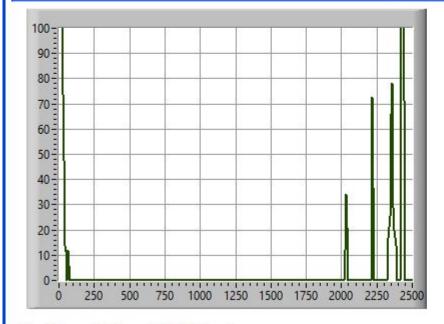

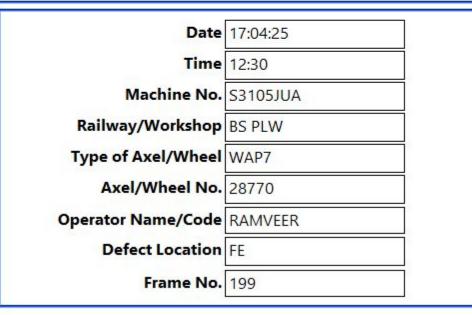


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 19-Apr-25 TIME: 9:22 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 26.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

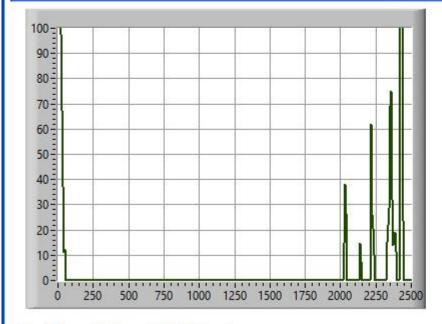

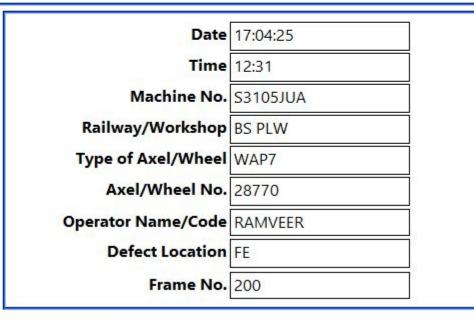

Test Result(Pass/Fail/Other) : If Other, then Remarks :

TOP 13 COSTLIEST ITEMS OF WAP-7 LOCO WITH WARRANTY CONDITIONS AS PER TENDERS

S No	PL No	DESCRIPTION	Warranty Period
1	29741075	IGBT BASED 3-PHASE DRIVE PROPULSION EQUIPMENT	60 months after commissioning or 72 months from date of supply whichever earlier as per special conditions given by CLW
2	29741087	2X500KVA IGBT Based Hotel Load Converter to CLW Specn. no. CLW/ES/3/IGBT/0490 aLT.D (REV.1) issued on December,2017	As per clause no. 3.1.6 of CLW SPECN. NO. CLW/ES/3/IGBT/0490 ALT.D REV.1 ISSUED ON DEC-2017. [60 months after commissioning or 72 months from date of supply whichever earlier]
3	29731057	MAIN TRANSFORMER 7775 KVA TYPE LOT 7500 FOR WAP7 3- PHASE ELECTRIC LOCOMOTIVE TO CLW SPECN NO.CLW/ES/3/0660/C	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
4	29171064	COMPLETE SHELL ASSLY (PIPED & PAINTED) FOR WAP-7 LOCO TO CLW SPEC. NO. CLW/MS/3/152 ALT-8	AS PER IRS CONDITIONS-30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER.
5	29600418	SET OF HARNESSED CABLE FOR 3-PHASE ELECTRIC LOCOMOTIVES TO CLW SPECN. NO. CLW/ES/03/646 ALT-NIL WITH DMW REQUIREMENT OF HARNESSED CABLE FOR WAP-7, ALT-A1 DATED 27/11/2018.	As per clause no.9 of CLW Specn. CLW/ES/3/0458 & Clause No.10 of CLW SpecnCLW/ES/3/0459. [18 months after commissioning or 20 months from date of supply for single core & 18 months after commissioning or 24 months from date of supply for multi core]

6	29180016	BRAKE CONTROL SYSTEM INCLUDING DRIVER'S VIGILANCE CONTROL DEVICE TO SET LIST NO.EL29180016.	As per specification no. CLW/MS/3/001 Alt. 16 i.e. the manufacturer is required to guarantee that the brakevalves/equipment work satisfactorily for a period of five (5) years after commissioning. Any equipment/part which failsduring the guarantee period shall be replaced free of cost by the manufacturer. The replaced components shallfurther be under warranty for five (5) years from the date of their fitment and should the replaced components proveunsatisfactory in service, they shall be replaced by modified and improved components by the supplier free of cost.
		COMPLETE ELLTED CUDICUE ALCANO MUTULALI	
7	29480140	COMPLETE FILTER CUBICLE ALONG WITH ALL EQUIPMENTS AND CABLING TO DRG./SPEC NO. [1] CLW/ES/3/0193 ALT-F OR LATEST AND CLW DRG. NO. 1209-15-143-004 ALT-10 AND PART DRG./SPEC NO AS PER ANNEXURE-A ATTACHED.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
8	29942007	3-PHASE ASYNCHRONOUS TRACTION MOTOR (RESISTANCE RING MECHANICALLY INTERLOCKED TO END PLATE DESIGN ROTOR, SCHEME-II), TYPE 6FRA-6068 FOR WAP-7 ELECTRIC LOCO WITHOUT ACTIVE SPEED SENSOR TO SPECIFICATION NO. 4TMS.096.081 ALT-2 AND STR NO. CLW/2008/3PHTM/STR/0001.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.

9	29105146	Bogie Frame Complete for WAP-7 for 3 Phase Co Co Locomotive to CLW specification No. CLW/MS/3/Bogie/003 alt-1 and CLW Drg.No.1209.01.112-202 Alt-Nil	As per clause 16 of Spec.No.CLW/MS/3/Bogie/003 Alt-1. [60 months after commissioning or 72 months from date of supply]
10	29171192	COMPLETE AUXILIARY CUBICLE HB2 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0192 ALT-E OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
11	29171210	COMPLETE CONTROL CUBICLE SB2 ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0195/A ALT-H OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
12	29171209	COMPLETE CONTROL CUBICLE SB1 (PUSH PULL SCHEME COMPLIANT) ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0194 ALT-G OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
13	29171180	COMPLETE AUXILIARY CUBICLE HB1 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0191 ALT-D OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.



भारत सरकार GOVERNMENT OF INDIA

रेल मंत्राल्य

MINISTRY OF RAILWAYS

पटियाला रेलइंजन कारखाना

PATIALA LOCOMOTIVE WORKS

Email: dyceeloco.dmw@gmail.com फैक्स/Fax No.: 0175-2397244 फोन/ Phone: 0175- 2396422

मोबाईल: 9779242310 पटियाला, 147003, भारत् PATIALA, 147003, INDIA



Date: As signed

(An ISO 9001, ISO 14001, ISO 45001 & ISO 50001, 5S & Green Building certified Organization)

No. PLW/M/ECS/Tech/Kavach

(Through Mail)

Sr. Div. Electrical Engineer, Electrical Loco Shed, Ghaziabad.

Email: srdeeelsgzb@gmail.com, gzbelstech@gmail.com

Sub:- Fitment of KAVACH in three Phase Electric Loco. No. 39471 WAP-7.

Ref:- (i). Director General Stds./Electrical/RDSO letter no. EL/0.1.3/3 dated 21.08.2023.

(ii).Director General Stds./Electrical/RDSO letter no. EL/0.1.3/3 dated 26.09.2023

In ref. to the above letter's Loco No. 39471 has been dispatched with fittings for implementation of KAVACH system in locomotive at home shed in Zonal Railway. This Loco was dispatched to ELS/GZB/NR on 07.06.2025. The details of fittings are attached as Annexure-A (pneumatic fittings), Annexure-B (Kavach equipment mounting Brackets) & Annexure-C (Wago with harnessed lay out).

This is for your information & necessary action please.

(निशांत बंसीवाल) उप मुख्य विद्युत अभियंता/लोको

प्रतिलिपि:-

CEE/Loco & CEE/D&Q, CMM, CELE/NR:- for kind information please Dy CME/Design, Dy. CMM/Depot: for information & necessary action please AWM/LAS, AWM/LFS&ABS, WM/ECS: for necessary action please

LOCO NO. 39471

ŚN	PL No.	Description of item	THY.
		ISOLATING COCK 3/8" (FEMALE) LEGRIS TYPE WITH VENT	04 nos.
1	29163341	ISOLATING COCK 3/8" (FEMALE) LEGRIS TYPE WITHOUT VENT	02 fics.
		TEE UNION 3/8"X3/8"X3/8" BRASS FITTINGS	02 das.
		MALE CONNECTORS 3/8" TUBE OD X 3/8" BSPT, BRASS FITTINGS	09 nos.
		MALE CONNECTORS 1/2" TUBE OD X 1/2" BSPT, BRASS FITTINGS	0 6 n os.
		FEMALE CONNECTORS (NYLON TUBE) DIA 6 TUBE X 3/8" BSPP BRASS FITTINGS	01 ho.
		MALE CONNECTOR (NYLON TUBE) DIA 6 TUBE X 3/8" BSPP BRASS	03 nos
		FEMALE TEE 3/8" BSPP – BRASS	O S pos
2	29611994	HEX PLUG -3/8" BSPT – BRASS	02 hos
		FEMALE TEE 1/2" BSPP – BRASS	04 nos
		HEX NIPPLE 3/8X3/8" BSPT – BRASS	0 4 hos
		RED HEX NIPPLE 3/8X1/2" BSPT - BRASS	02 nos
		HEX PLUG – 1/2" BSPT – BRASS	04 nos
		MALE ELBOW CONNECTORS 3/8" TUBE OD X 3/8) BSPT. BRASS FITTINGS	02 nos
3	29170114	Copper Tube OD 9.52mm (3/8") X 1.245 Mm W.T X 6 Mtr	1.2Mtr

AWM/ABS & LFS

SSEIGIABS

	PL No.	Description of item	Quantity
SN 1.	29611945	Mounting bracket arrangement provided for RF Antenna on the roof top of both driver cabs.	0,4 nos.
2.		Mounting bracket arrangement provided for GPS/GSM Antenna on the roof top of both driver cabs.	02 nos.
3.		Protection Guards for RFID reader provided behind the cattle	04 nos.
4.		Inspection door with latch provided on the both driver desk covers (LP side) in each cab to access isolation cock.	02 nos.
5.		Cable Entry Plate fitted for routing of cable with RF Antenna & GPS/GSM Antenna bracket.	06 nos.
6.	_	WAGO bracket fitted in Machine room at back side of SB-1.	01 no.
7.	-	One circular hole of 80 mm dia. provided in each cabs on LP side behind the driver desk toward the wall for routing of OCIP (DMI) cables.	02 nos.
8.	<u>.</u>	80 mm holes provided on TM1 and TM6 Junction box inspection cover hole for drawing of RFID reader cables.	02 nos.
9.	-	DIN Rail fitted inside the driver desk (LP Side)	02 nos.

AWM ABS & LFS

SSE/G/LFS

Annexure-C

SN	PL No.	Description of Item	Quantity
1.	42310301	Flexible conduit size 25mm ² provided for RF-1, 2 & GPS Antenna cable layout from CAB-1&2 to Machine room.	06 mtr.
2.	29611982	Wago terminals in CAB-1&2 (25 nos. in each CAB).	50 nos.
3.	29611982	Wago terminal in Machine room at back side of SB-1.	75 nos.
4.	<u></u>	Harness provided from KAVACH SB to SB-1	07 wires
5.	-	Harness provided from KAVACH SB to SB-2	05 wires
6.	-	Harness provided from KAVACH SB to Pneumatic Panel	12 wires
7.		Harness provided from KAVACH SB to CAB-1	16 wires
8.		Harness provided from KAVACH SB to CAB-2	16 wires

AWMIES

SSEIGIECS