# भारतीय रेल Indian Railways

पटियाला रेलइंजन कारख़ाना, पटियाला

# PATIALA LOCOMOTIVE WORKS, PATIALA



LOCO TESTING & DISPATCH REPORT OF IGBT BASED wAg9hc ELECTRIC LOCOMOTIVE

LOCO NO.: 42022

TYPE: WAG9HC

Rail way shed: scr/kzjl

ProPulsion system: cgl

Date of Dispatch: 28.02.2025

लोको निर्माण रिकार्ड



# पटियाला रेलइंजन कारख़ाना, पटियाला PATIALA LOCOMOTIVE WORKS, PATIALA

LOCO NO.: 42022

RAILWAY/SHED: SCR/KZJL

DOD: Feb-2025

## **INDEX**

SN	PARA	ACTIVITIES	PAGE NO.	
Testing & Commissioning (ECS)				
1.	1.0	Continuity Test of the cables		
	1.1	Continuity Test of Traction Circuit Cables		
	1.2	Continuity Test of Auxiliary Circuit Cables	1-4	
	1.3	Continuity Test of Battery Circuit Cables		
	1.4	Continuity Test of Screened Control Circuit Cables		
2.	2.0	Low Tension test		
	2.1	Measurement of resistor in OHMS (Ω)	5-6	
	2.2	Check Points	3-0	
	2.3	Low Tension Test Battery Circuits (without control electronics)		
3	3.0	Downloading of Software		
	3.1	Check Points		
	3.2	Download Software	7-10	
	3.3	Analogue Signal Checking		
	3.4	Functional test in simulation mode		
4	4.0	Sensor test & convertor test		
	4.1	Test wiring Transformer Circuits – Polarity Test		
	4.2	Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)		
	4.3	Primary Voltage Transformer		
	4.4	Minimum voltage relay (Pos. 86)	11-16	
	4.5	Maximum current relay (Pos. 78)	17.76	
	4.6	Test current sensors		
	4.7	Test DC Link Voltage Sensors (Pos 15.6/*)		
	4.8	Verification of Converter Protection Circuits (Hardware limits)		
	4.9	Sequence of BUR contactors		
5.	5.0	Commissioning with High Voltage		
	5.1	Check List		
	5.2	Safety test main circuit breaker		
	5.3	Auxiliary Converter Commissioning		
	5.3.1	Running test of 3 ph. auxiliary equipments		
	5.3.2	Performance of Auxiliary Converters	40.05	
	5.3.3	Performance of BURs when one BUR goes out	16-25	
	5.4 5.5	Auxiliary circuit 415/110		
	5.5 5.6	Hotel Load Circuit Treation Convertor Commissioning		
	5.6 5.7	Traction Converter Commissioning Test protective shutdown SP		
	5.7 5.8	Test protective shutdown SR Test Harmonic Filter		
	5.6 5.9	Test important components of the locomotive		
6.	6.0	Running Trial of the locomotive	25-26	
7.	7.0	Final Check List to be verified at the time of Loco dispatch	27	
8.	8.0	Status of RDSO modifications	28	
9.	1-10	Pneumatic Test Parameters	29 - 32	
10.		Loco Check Sheet(LAS)	33	
11.	-	Component History (LAS,ECS,ABS)	34-36	
12.	-	Component History & Testing Parameter (Bogie Shop)	37 - 38	
13	-	Warranty Conditions as per Tenders	39 -41	

(Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42022 - CGL

Type of Locomotive: WAP-7/WAG-9HC

# 1.0 Continuity Test of the cables

Page: 1 of 27

1.1 Continuity Test of Traction Circuit Cables

As per cable list given in Para 1.3 of document no. 3 EHX 410 124, check the continuity with continuity tester and megger each cable to be connected between following equipment with 1000V megger.

From	То	Continuity (OK/Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Filter Cubicle	Transformer	OK	100 ΜΩ	800ma
Filter Cubicle .**	Terminal Box of Harmonic Filter Resistor (Roof)	oK	100 ΜΩ	STOMO
Filter Cubicle	Earthing Choke	OK	100 ΜΩ	OSOM .
Earthing Choke	Earth Return Brushes	OK.	100 ΜΩ	650MA
Transformer	Power Converter 1	ok	100 ΜΩ	650ma
Transformer	Power Converter 2	oK	100 ΜΩ	600M9
Power Converter 1	TM1, TM2, TM3	oK	100 ΜΩ	650ma
Power Converter 2	TM4, TM5, TM6	OK	100 ΜΩ	booms
Earth	Power Converter'1	OK	100 ΜΩ	bsoma
Earth	Power Converter 2	OK	100 ΜΩ	600MA

## 1.2 Continuity Test of Auxiliary Circuit Cables

As per cable list given in Para 1.4 of document no. 3 EHX 410 124, check the continuity with continuity meter and megger each cable to be connected between following equipment with the, help of 1000V megger.

Signature of the JE/SSE/Harness

Signature of the JE/SSE/Loco Cabling

(Ref: WI/ECS/10)

Effective Date: Feb 2022

# PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42012

Type of Locomotive: WAP-7/WAG-9HC

Page: 2 of 27

From	To دني	Continuity(OK/ Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Transformer	BUR1	8V-	100 ΜΩ	600 Mr
Transformer	BUR2	ote	100 ΜΩ	700 M/L
Transformer	BUR3	ØL-	100 ΜΩ	900 ma
Earth	BUR1	Ne	100 MΩ	600 m
Earth	BUR2	ok.	100 MΩ	600 Mr
Earth	BUR3	OK	100 MΩ	700 M
BUR1	HB1	ok	100 ΜΩ	600 M/L
BUR2	HB2	06	100 ΜΩ	700 00/2
HB1	HB2	ol_	100 ΜΩ	600 ML
HB1	TM Blower 1	Ob-	100 MΩ	600 MC
HB1	TM Scavenge Blower 1	Ola	100 MΩ	700 m
HB1	Oil Cooling Unit 1	OL	100 ΜΩ	600 m/2
HB1	Compressor 1	ok	100 MΩ	800 m/
HB1	TFP Oil Pump 1	ok_	$100~{ m M}\Omega$	600 m/L
, HB1	Converter Coolant Pump 1	ol	100 ΜΩ	goo m
HB1	MR Blower 1	OL	100 MΩ	500 m2
HB1	MR Scavenge Blower 1	OK	100 ΜΩ	500 MA
HB1	Cab1	Ole	100 ΜΩ	600 m
Cab1	Cab Heater 1	OL_	100 MΩ	Too me
HB2	TM Blower 2	OL	100 MΩ	600 M/
HB2	TM Scavenge Blower 2	Ola	100 ΜΩ	900 m
HB2	Oil Cooling Unit 2	OL	100 MΩ	600 m
HB2	Compressor 2	Ok.	100 ΜΩ	SOOMS
HB2	TFP Oil Pump 2	ok	100 MΩ	600 m
HB2	Converter Coolant Pump 2	01_	100 MΩ	800 m/
HB2	MR Blower 2	ok	100 MΩ	600 mr
HB2	MR Scavenge Blower 2	OL	100 ΜΩ	600ML
HB2	Cab2	ok.	100 ΜΩ	Soome
Cab2	Cab Heater 2	<i>ا</i>	100 ΜΩ	600 Mr

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42029

Type of Locomotive: WAP-7/WAG-9HC

Page: 3 of 27

(Ref: WI/ECS/10)

1.3 Continuity Test of Battery Circuit Cables

Check continuity of following cables as per Para 2.3 of document no. 3 EHX 610 299

From	То	Condition	Continuity (OK/Not OK)
Battery (wire no 2093)	Circuit breakers 110- 2, 112.1-1, 310.4-1	By opening and closing MCB 112	øK.
MCB 110	Connector 50.X7-1	By opening and closing MCB 110	ok
Battery (Wire no. 2052)	Connector 50.X7-2		ok
SB2 (Wire no 2050)	Connector 50.X7-3		ø/<

Close the MCB 112, 110, 112.1, and 310.4 and measure the resistance of battery wires 2093, 2052, 2050 with respect to the loco earth.	Prescribed value $> 0.5 \ M\Omega$	Measured  Value  MΩ
Measure the resistance between 2093 & 2052, 2093 & 2050, 2052 & 2050	Prescribed value: $> 50 \text{ M}\Omega$	Measured  Value $60$ M $\Omega$

Commission the indoor lighting of the locomotive as per Sheet No 7A & 7B.

# 1.4 Continuity Test of Screened Control Circuit Cables

Check the continuity and isolation of the screen cable of the following circuits with the help of sheet no. mentioned against each as per document no. 3 EHX 610 299.

Screened control circuit cables for	Corresponding Sheet Nos.	Continuity & Isolation (OK/Not OK)
Battery voltage measurement	04B	. ok
Memotel circuit of cab1 &2	10A	ak
Memotel speed sensor	10A	ok
Primary voltage detection	01A, 12A	0k
Brake controller cab-1 & 2	06F, 06G	ak

DOC.NO.F/ECO/O (Ref: WI/ECS/10)

Effective Date: Feb 2022

# PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48029

Type of Locomotive: WAP-7/WAG-9HC Page: 4 of 27

Master controller cab-1 &2	08C, 08D	øK
TE/BE meter bogie-1 & 2	08E, 08F	ok
Terminal fault indication cab-1 & 2	09F	OK
Brake pipe pressure actual BE electric	06H	ok
Primary current sensors	12B, 12F	Ok
Harmonic filter current sensors	12B, 12F	ØK.
Auxiliary current sensors	12B, 12F	oK
Oil circuit transformer bogie 1	12E, 12I	ak
Magnetization current	12C, 12G	ok
Traction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-1	12D	ak
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-2	12D	ok
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-3	12D	de
Traction motor/speed sensors (2 nos.) and temperature sensors (1 no.) of TM-4	12H	ok.
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-5	12H	OK
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-6	12H	· ok
Train Bus cab 1 & 2 (Wire U13A& U13B to earthing resistance=	13A	OK
10K <b>Ω</b> ± ± 10%)	•	
UIC line	13B	OK
Connection FLG1-Box TB	13A	Ok

Doc.No.F/ECS/VI · (Ref: WI/ECS/10)

Effective Date: Feb 2022

# PATIALA LOCOMOTIVE WORKS, PATIALA

# Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC

Page: 5 of 27

# 2.0 Low Tension test

2.1 Measurement of resistor in OHMS ( $\Omega$ )

Measure the resistances of the load resistors for primary voltage transformer, load resistors for primary current transformer and Resistor harmonic filter as per Para 3.2 of the document no. 3 EHX 610 279.

Name of the resistor	Prescribed value	Measured value
Load resistor for primary voltage transformer (Pos. 74.2).	3.9K <b>Ω</b> ± 10%	3.9ku
Resister to maximum current relay.	1Ω ± 10%	12
Load resistor for primary current transformer (Pos. 6.11).	3.3 <b>Ω</b> ± 10%	3.3.1
Resistance harmonic filter (Pos 8.3). Variation allowed ± 10%	WAP7	WAP7
Between wire 5 & 6	0.2 Ω	0.22
Between wire 6 & 7	0.2 Ω	مرد، ه
Between wire 5 & 7	0.4 Ω	0.45
For train bus, line U13A to earthing.	10 k <b>Ω</b> ± 10%	999 KZ
For train bus, line U13B to earthing.	10 k <b>Ω</b> ± 10%	10.0KU
Insulation resistance of High Voltage Cable from the top of the roof to the earth (by1000 V megger).	200 ΜΩ	3 00 MM.
Resistance measurement earth return brushes Pos. 10/1.	≤0.3 Ω	0.292
Resistance measurement earth return brushes Pos. 10/2.	≤0.3 Ω	0.290
Resistance measurement earth return brushes Pos. 10/3.	≤0.3 Ω	0.302
Resistance measurement earth return brushes Pos. 10/4.	≤0.3 Ω	0.282
Earthing resistance (earth fault detection) Harmonic Filter –I; Pos. 8.61.	<b>2.2 kΩ</b> ± 10%	2.242
Earthing resistance (earth fault detection) Harmonic Filter –II; Pos 8.62.	2.7 kΩ± 10%	2.742
Earthing resistance (earth fault detection) Aux. Converter; Pos. 90.3.	3.9 k <b>Ω</b> ± 10%	3.9KL
Earthing resistance (earth fault detection) 415/110V; Pos. 90.41.	1.8 k <b>Ω</b> ± 10%	1.8KL
Earthing resistance (earth fault detection) control circuit; Pos. 90.7.	390 <b>Ω</b> ± 10%	390A
Earthing resistance (earth fault detection) Hotel load; Pos. 37.1(in case of WAP5).	3.3 kΩ± 10%	NA.
Resistance for headlight dimmer; Pos. 332.3.	10Ω ± 10%	10.50

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 420 23

Type of Locomotive: WAP-7/WAG-9HC

Page: 6 of 27

(Ref: WI/ECS/10)

Make sure that the earthing brush device don't make direct contact with the axle housing,

earth connection must go by brushes.

## 2.2 Check Points

Items to be checked	Remarks	
Check whether all the earthing connection in roof and machine room as mentioned in sheet no. 22A is done properly or not.  These earthing connections must be flexible and should be marked yellow & green	Checkel ok	
Check whether all the earthing connection between loco body and bogie is done properly or not. These cables must be flexible having correct length and cross section	checked ok	

# 2.3 Low Tension Test Battery Circuits (without control electronics)

These tests are done with the help of the special type test loop boxes as per procedure given in Para 3.6 of the document no. 3 EHX 610 279

Para 3.6 of the document no. 3 EHX 6  Name of the test	Schematic used.	Remarks
Test 24V supply	Sheet 04F and other linked sheets	Checked ois
Test 48V supply	Sheet 04F & sheets of group 09	Fan supply to be checked.
Test traction control	Sheets of Group 08.	ak
Test power supply bus stations.	Sheets of Group 09.	Fan supply to be checked.
Test control main apparatus	Sheets of Group 05.	ols
Test earth fault detection battery circuit by making artificial earth fault to test the earth fault detection	Sheet 04C	ck
Test control Pneumatic devices	Sheets of Group 06	ok
Test lighting control	Sheets of Group 07	ols
Pretest speedometer	Sheets of Group 10	ok -
Pretest vigilance control and fire system	Sheets of Group 11	øk
Power supply train bus	Sheets of Group 13	Ø(<

Doc.No.F/ECS/UI (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

# Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 420293.0 Downloading of Software

Type of Locomotive: WAP-7/WAG-9HC

Page: 7 of 27

3.1 Check Points.	Yes/No
Check that all the cards are physically present in the bus stations and all the plugs are connected.	40)
Check that all the fibre optic cables are correctly connected to the bus stations.	40
Make sure that <b>control electronics off relay</b> is not energized i.e. disconnect Sub-D 411.LG and loco is set up in simulation mode.	Yes
Check that battery power is on and all the MCBs (Pos. 127.*) in SB1 &SB2 are on	48)

3.2 Download Software

The software of Traction converter, Auxiliary converter and VCU should be done by commissioning engineer of the firm in presence of supervisor. Correct software version of the

propulsion equipment to be ensured and noted:

28
28
510
410
4,0
1600
1600

3.3 Analogue Signal Checking

Check for the following analogue signals with the help of diagnostic tool connected with loco.

<b>Description</b>	Signal name	Prescribed value	Measured Value
Brake pipe pressure	FLG2;0101XPrAutoBkLn	100% (= 5 Kg/cm2)	en
Actual BE electric	FLG2; AMSB_0201- Wpn BEdem	100% (= 10V)	علا
TE/BE at 'o' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 9% and 11 %	104,
TE/BE at 'TE maximal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 99 % and 101 %	1 25.17
TE/BE at 'TE minimal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 20 % and 25 %	257.

PATIALA LOCOMOTIVE WORKS, PATIALA

(Ref: WI/ECS/10)

DOC.NO.FECSIVE

# <u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u> <u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC

Page: 8 of 27

TE/BE at 'BE maximal' position from both cab	FLG1; AMSB_0101- XangTrans FLG2; AMSB_0101- XangTrans	Between 99% and 101%	100-1-
TE/BE at 'BE Minimal' position from both cab	FLG1; AMSB_0101- XangTrans FLG2; AMSB_0101- XangTrans	Between 20% and 25%	25),
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1; AMS_0101- LT/BDEM>1/3 HBB2; AMS_0101- LT/BDEM>1/3	Between 42 and 44%	444,
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1; AMS_0101- LT/BDEM>2/3 HBB2; AMS_0101- LT/BDEM>2/3	Between 72 and 74%	741,
Both temperature sensor of TM1	SLG1; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	1600
Both temperature sensor of TM2	SLG1; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	17°C
Both temperature sensor of TM3	SLG1; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	16°C
Both temperature sensor of TM4	SLG2; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	16°0
Both temperature sensor of TM5	SLG2; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	16.5°C
Both temperature sensor of TM6	SLG2; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	170-

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42023

Type of Locomotive: WAP-7/WAG-9HC

Page: 9 of 27

# 3.4 Functional test in simulation mode

Conduct the following functional tests in simulation mode as per Para 5.5 of document no.3EHX 610 281. through the Diagnostic tool/laptop:

Test Function	Result desired in sequence	Result obtained
Emergency shutdown through emergency stop switch 244	VCB must open. Panto must lower.	Cheekes 18
Shut Down through cab activation switch to OFF position	VCB must open. Panto must lower.	checkedok
Converter and filter contactor operation with both Power Converters during Start Up.	FB contactor 8.41 is closed.  By moving reverser handle:  Converter pre-charging contactor 12.3 must close after few seconds.  Converter contactor 12.4 must close.  Converter re-charging contactor 12.3 must opens.  By increasing TE/BE throttle:  FB contactor 8.41 must open.  FB contactor 8.2 must close.  FB contactor 8.1 must close.	Checkedon
	<ul> <li>Bring TE/BE to O.</li> <li>Bring the cab activation key to "O"</li> <li>VCB must open.</li> <li>Panto must lower.</li> <li>Converter contactor 12.4 must open.</li> <li>FB contactor 8.1 must open.</li> <li>FB contactors 8.41 must close.</li> <li>FB contactor 8.2 must remain closed.</li> </ul>	r

(Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42099

Type of Locomotive: WAP-7/WAG-9HC Page : 10 of 27

Contactor filter adaptation by isolating any bogie	Isolate any one bogie through bogie cut out switch. Wait for self-test of the loco.  • Check that FB contactor 8.1 is open.  • Check that FB contactor 8.2 is open.  After raising panto, closing VCB, and setting TE/BE  • FB contactor 8.1 closes.  • FB contactor 8.2 remains open.	Checkelok
Test earth fault detection battery circuit positive & negative	By connecting wire 2050 to earth, create earth fault negative potential.  • message for earth fault  • By connecting wire 2095 to earth, create earth fault positive potential.  • message for earth fault	Checked as
Test fire system. Create a smoke in the machine room near the FDU. Watch for activation of alarm.	When smoke sensor-1 gets activated then  • Alarm triggers and fault message priority 2 appears on screen.  When both smoke sensor 1+2 gets activated then  • A fault message priority 1 appears on screen and lamp LSF1 glow.  • Start/Running interlock occurs and TE/BE becomes to 0.	Chechelox
Time, date & loco number	Ensure correct date time and Loco number	ok

Effective Date: Feb 2022

(Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

# Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC

Page : 11 of 27

# 4.0 Sensor Test and Converter Test

4.1 Test wiring main Transformer Circuits

Apply  $198V_p/140V_{RMS}$  to the primary winding of the transformer (at 1u; wire no. 2 at surge arrestor and at 1v; wire no. 100 at earthing choke). Measure the output voltage and compare

e of the following of the transformers.

Output Winding nos.	Description of winding.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
2U <sub>1</sub> & 2V <sub>1</sub>	For line converter bogie 1 between cable 801A- 804A	10.05V <sub>p</sub> and same polarity	10.0446	OK.
2U <sub>4</sub> & 2V <sub>4</sub>	For line converter bogie 1 between cable 811A- 814A	10.05V <sub>p</sub> and same polarity	10.0500	e <sub>V</sub> _
2U <sub>2</sub> & 2V <sub>2</sub>	For line converter bogie 2 between cable 801B- 804B	10.05V <sub>p</sub> and same polarity	10.0500	عد.
2U <sub>3</sub> & 2V <sub>3</sub>	For line converter bogie 2 between cable 811B-814B	10.05V <sub>p</sub> and same polarity	10.044	. OK
2U <sub>B</sub> & 2V <sub>B</sub>	For aux. converter 1 between cable 1103- 1117 (in HB1) For Aux converter 2 between cable 1103- 1117 (in HB2)	7.9V <sub>p</sub> , 5.6V <sub>RMS</sub> and same polarity.	7.8 VP , 5.5 Vp.ms	ev
2U <sub>F</sub> & 2V <sub>F</sub>	For harmonic filter between cable 4-12 (in FB)	9.12V <sub>p</sub> , 6.45V <sub>RMS</sub> and same polarity.	9:11 P 6:44 Upms	Og

# 4.2 Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)

Apply  $141V_p$  /  $100V_{RMS}$  to input of the auxiliary transformer at cable no 1203 –1117 and measure the output at

Description of wire no.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
Cable no. 1218 - 1200	58.7V <sub>p</sub> , 41.5V <sub>RMS</sub> and opposite polarity.	58.70 41.50 Rms)	8 <sub>16</sub>
Cable no. 1218 – 6500	15.5V <sub>p</sub> , 11.0V <sub>RMS</sub> and opposite polarity.	15.579	PK

Effective Date: Feb 2022

(Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42029

Type of Locomotive: WAP-7/WAG-9HC Page: 12 of 27

#### **Primary Voltage Transformer** 4.3

Apply  $250V_{eff}/350V_p$  by variac to roof wire 1 and any wire 0 and measure the magnitude and polarity of the output of the primary voltage transformer for both bogies as per the procedure specified and suggested by the traction converter manufacturer. Primary voltage measurement converters (Pos. 224.1/\*) & catenary voltmeter (Pos. 74/\*)

This test is to be done for each converter.

Activate cab in driving mode and supply  $200V_{RMS}$  through variac to wire no 1501 and 1502. Monitor the following parameters through Diagnostic tool and in catenary voltmeter.

	Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
ŀ	SLG1 G 87-XUPrim	25kV	250%	35 KV	250 X.
ŀ	SLG2 G 87-XUPrim	25 kV	250%	95 150	250 X

Decrease the supply voltage below 140 V<sub>RMS</sub>. VCB must open at this voltage. In this case the readings in Diagnostic Tool and catenary voltmeter will be as follows.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1 G 87-XUPrim	17kV	170%	12/11	1704
SLG2 G 87-XUPrim	17 kV	170%	17 KV	1707

Reactivate VCB to on by increasing this voltage to 175% (17.5 kV).

Increase the supply to 240 V<sub>RMS</sub> through variac. VCB must open at this voltage, In this case the readings in diagnostic tool and catenary voltmeter will be as follows:

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1 G 87-XUPrim	30kV	300%	30150	300%
SLG2_G 87-XUPrim	30 kV	300%	30 KV	3004.

Reactivate VCB to on by decreasing this voltage to 290% (29 kV).

PATIALA LOCOMOTIVE WORKS, PATIALA

(Ref: WI/ECS/10)

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42082

Type of Locomotive: WAP-7/WAG-9HC

Page: 13 of 27

#### Minimum voltage relay (Pos. 86) 4.4

Functionality test:	d to approv 68%
Minimum voltage relay (Pos. 86) must be adjuste	d to approx 0876
Activate loco in cooling mode. Check Power supply of 48V to minimum voltage relay. Disconnect primary voltage transformer (wire no. 1511 and 1512) from load resistor (Pos. 74.2) and connect variac to wire no. 1501 and 1502. Supply	Wes/No)
200V <sub>RMS</sub> through variac. In this case; <i>Minimum voltage relay</i> (Pos. 86) picks up	
The state of the sale in driving mode:	(Yes/No)
Try to activate the cab in driving mode:  Contactor 218 do not close; the control electronics is not be working.	
Turn off the variac :	(Yes/No)
Contactor 218 closes; the control electronics is be	
working	
Test Under Voltage Protection;	
Activate the cab in cooling mode; Raise panto;	(Yes/No)
Supply 200V <sub>RMS</sub> through variac to wire no. 1501	
& 1502; Close the VCB; Interrupt the supply	
voltage	
The VCB goes off after 2 second time delay.	
Again supply 200V <sub>RMS</sub> through variac to wire no. 1501 & 1502; Decrease the supply voltage below	(Yes/No)
140V <sub>RMS</sub> ± 4V;	
Fine tune the minimum voltage relay so that VCB opens.	

Disconnect wire 1521 & 1522 of primary current transformer; Connect variac to wire 1521 &1522 (including the resistor at Pos. 6.11); Put loco in simulation for driving mode; Open  $R_3 - R_4$ on contact 136.3; Close VCB; supply 3.6A<sub>RMS</sub> at the open wire 1521; Tune the drum of the maximum current relay Pos. 78 for correct over current value; UYes/No) VCB opens with Priority 1 fault message on display. Keep contact  $R_3$  –  $R_4$  of 136.3 closed; Close VCB; Tune the resistor 78.1 for the current of 7.0 $A_{RMS}$  $/9.9A_{\rm p}$  at the open wire 1521; YYes/No) VCB opens with Priority 1 fault message on display.

(Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42029

Type of Locomotive: WAP-7/WAG-9HC

Page: 14 of 27

4.6 Test current sensors Name of the sensor	Description of the test	Prescribed value	Set/Measured value
Primary return current sensor (Test-1,Pos.6.2/1 & 6.2/2)	Activate cab in driving mode supply 10A. Measure the current through diagnostic tool or measuring print.	(Variation allowed is ± 10%)	
Primary return current	Supply 90mA <sub>DC</sub> to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)		
sensor (Test-2, Pos.6.2/1 & 6.2/2)	Supply 297mA <sub>DC</sub> to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)		2-98 mg
Auxiliary winding current sensor (Pos. 42.3/1 & 42.3/2)	Supply 90mA <sub>DC</sub> to the test winding of sensor through connector 415.AC/1or 2 pin no. 7(+) & 8(-) Supply 333mA <sub>DC</sub> to the test winding of sensor through connector 415.AC/1		335mB
Harmonic filter current sensors (Pos.8.5/1 &8.5/2)	or 2 pin no. 7(+) & 8(-)  Supply 90mA <sub>DC</sub> to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)		
· · · · · · · · · · · · · · · · · · ·	Supply 342mA <sub>DC</sub> to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)		346mh
Hotel load current sensors (Pos. 33/1 &	Switch on hotel load. Supply 90mA <sub>DC</sub> to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) 8(-)		NA
33/2)	Supply 1242mA <sub>DC</sub> to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) & 8(-)	NA	AK

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

## PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 4242

Type of Locomotive: WAP-7/WAG-9HC

Page: 15 of 27

4.7 Test DC Link Voltage Sensors (Pos 15.6/\*)

This test is to be done by the commissioning engineer of the firm if required.

## 4.8 Verification of Converter Protection Circuits (Hardware limits) -

This test is to be done as per para 6.17 of the document no. 3EHX 610 282 for both the converters.

Protection circuits	Limit on which shutdown should take place	Measured limit	
Current sensors (Pos 18.2/1, 18.2/2,	Increase the current quickly in	For 18.2/1=	7
18.2/3, 18.4/4, 18.5/1, 18.5/2,	the test winding of the current	For 18.2/2=	1
18.5/3)	sensors, VCB will off at 2.52A	For 18.2/3=	1
for Power Converter 1	with priority 1 fault for each	For 18.4/4=	
	sensor.	For 18.5/1=	Y
· .		For 18.5/2=	0
		For 18.5/3=	
Current sensors (Pos 18.2/1, 18.2/2,	Increase the current quickly in	For 18.2/1=	ৰ্ব
18.2/3, 18.4/4, 18.5/1, 18.5/2,	the test winding of the current	For 8.2/2=	
18.5/3)	sensors, VCB will off at 2.52A	For 18.2/3=	V
for Power Converter 2	with priority 1 fault for each	For 18.4/4=	<b>V</b>
*	sensor.	For 18.5/1=	1 0
		For 18.5/2=	"
	·	For 18.5/3=	
Fibre optic failure In Power	Remove one of the orange	•	+
Converter1	fibre optic plugs on traction	.1.	
	converter. VCB should trip	ok	
Fibre optic failure in Power	Remove one of the orange		-
Converter2	fibre optic plugs on traction	Gla	
•	converter. VCB should trip	-1,	1

# 4.9 Sequence of BUR contactors

The sequence of operation of BUR contactors for 'ALL BUR OK' BUR 1 out BUR 2 out and BUR 3 out condition has to be verified by putting the Loco in driving mode (VCB should not be closed) and isolating the BURs one by one. In these condition following will be the contactor sequence.

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52 5/1	52.5/2
AI BUR OK	Close	Open	Close	Open	Close	Open	Close	Close	Open
BUR1 off	Close	Open	Close	Close	Open	Close	Open	Open	Close
BUR2 off	Open	Open	Close	Close	Close	Close	Open	Open	Close
BUR3 off	Open	Close	Open	Close	Close	Close	Open	Open	Close

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC

Page: 16 of 27

## Monitored contactor sequence

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
AI BUR OK	10000	nen	Close	Nen	Clare	clen	clare	Classe	de
BUR1 off	1620	den	Close	Clase	Der	close	Mer	alla	Classe
BUR2 off	den	den	Can Be	10,20	Case	Core	for	de	Clase
BUR3 off	De-	clare	Den	Close	Clare	Carre	de	Den	Clube

## 5.0 Commissioning with High Voltage

## 5.1 Check List

Items to be checked	Yes/No
Fibre optic cables connected correctly.	Yes
No rubbish in machine room, on the roof, under the loco.	yes
All the electronic Sub-D and connectors connected	100
All the MCBs of the HB1 & HB2 open.	Yen
All the three fuses 40/* of the auxiliary converters	Yes
The fuse of the 415/110V auxiliary circuit (in HB1) open.	yes
Roof to roof earthing and roof to cab earthing done	Yes
Fixing, connection and earthing in the surge arrestor done correctly.	190
Connection in all the traction motors done correctly.	رص ا
All the bogie body connection and earthing connection done correctly.	Yes
Pulse generator (Pos. 94.1) connection done correctly.	Yes
All the oil cocks of the gate valve of the transformer in open condition.	43
All covers on Aux & Power converters, Filter block, HB1, HB2 fitted	Yes
KABA key interlocking system.	10)

# 5.2 Safety test main circuit breaker

Prepare to switch off the catenary supply during the first charging of the locomotive in case of any unexpected behavior of the electrical component of the loco. Charge the loco for the first time by closing BLDJ switch. The VCB will trip after certain time as no oil/coolant pumps are running yet.

Perform the following safety test of main circuit breaker through both the cabs of the locomotive.

Effective Date: Feb 2022

(Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42922

Type of Locomotive: WAP-7/WAG-9HC Page: 17 of 27

DOC.NO.F/ECS/UI

Name of the test	Description of the test	Expected result	Monitored result
Emergency stop in cooling mode	Raise panto in cooling mode. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	Checkesok
Emergency stop in driving mode	Raise panto in driving mode in. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	cheekes NK
Under voltage rotection in cooling mode	Raise panto in cooling mode. Close the VCB. Switch off the supply of catenary by isolator	VCB must open.	Meckedole
Under voltage protection in driving mode	Raise panto in driving mode. Close the VCB. Switch off the supply of catenary by isolator	VCB must open with diagnostic message that catenary voltage out of limits	Checked ok
Shut down in cooling mode.	Raise panto in cooling mode. Close the VCB. Bring the BL- key in O position.	VCB must open. Panto must lower.	Cheekesok
Shutdown in driving mode	Raise panto in driving mode. Close the VCB. Bring the BL-key in O position.	VCB must open. Panto must lower.	Cheekeson
Interlocking pantograph- VCB in cooling *** mode	Raise panto in cooling mode. Close the VCB. Lower the pantograph by ZPT	VCB must open.	Cheeked 610
Interlocking pantograph- VCB in driving mode	Raise panto in driving mode. Close the VCB. Lower the pantograph by ZPT	VCB must open.	Cheareson

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

## PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: りか変す

Type of Locomotive: WAP-7/WAG-9HC

Page: 18 of 27

## 5.3 Auxiliary Converter Commissioning

Switch on the high voltage supply and set up the loco in driving mode. Raise the panto. Close the VCB. Check that there is no earth fault in the auxiliary circuit, Switch off the VCB. Lower the panto. Create the earth fault in auxiliary circuit by making connection between wire no 1117(in HB2 cubicle) and earth. After 3 minutes a diagnostic message will come that "Earth fault auxiliary circuit."

## 5.3.1 Running test of 3 ph. auxiliary equipments

Switch on the 3 ph. auxiliary equipment one by one. Check the direction of rotation of each auxiliary machine and measure the continuous current and starting current drawn by them.

Name of the auxiliary machine	Typical phase current	Measured continuous phase current	Measured starting phase current
Oil pump transformer 1	9.8 amps	7.5	7.8
Oil pump transformer 2	9.8 amps	7.0	98
Coolant pump converter 1	19.6 amps	5.1	6.8
Coolant pump converter 2	19.6 amps	5.2	6.5
Oil cooling blower unit 1	40.0 amps	41.0	121.0
Oil cooling blower unit 2	40.0 amps	40.0	118.3
Traction motor blower 1	34.0 amps	22.3	500
Traction motor blower 2	34.0 amps	26.4	45.5
Sc. Blower to Traction motor blower 1	6.0 amps	4.3	14.4
Sc. Blower to Traction motor blower 1	6.0 amps	4.0	18.0
Compressor 1	25 amps at 0 kg/cm <sup>2</sup> 40 amps at 10 kg/cm <sup>2</sup>	24.4	103.5
Compressor 2	25 amps at 0 kg/cm <sup>2</sup> , 40 amps at 10 kg/cm <sup>2</sup>	220	145.3

Effective Date: Feb 2022

Doc.No.F/ECS/01
(Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC

Page: 19 of 27

5.3.2 Performance of Auxiliary Converters

Measure the performance of the auxiliary converters through software and record it.

BUR1 (Condition: Switch off all the load of BUR 1)- to be filled by commissioning engineer

of the firm.

Signal name	Description of the signal	Prescribed value	Monitored value	Value under Limit (Yes/No)
BUR1 7303 XUUN	Input voltage to BUR1	75% (10%=125V)	998V	Yey
BUR1 7303 XUUZ1	,DC link voltage of BUR1	60% (10%=100V)	638	Yes
BUR1 7303 XUIZ1	DC link current of BUR1	0% (10%=50A)	1 Ann	Yes

BUR2 (Condition: Switch off all the load of BUR 2, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed value by the firm	Monitored value	Value under Limit (Yes/No)
BUR2 7303-XUUN	Input voltage to BUR2	75% (10%=125V)	10020	109
BUR2 7303-XUUZ1	DC link voltage of BUR2	60% (10%=100V)	6370	Yey
BUR2 7303-XUIZ 1	DC link current of BUR2	1% (10%=50A)*	7 Amp	You
BUR2 7303-XUILG	Current battery charger of BUR2	3% (10%=100A)*	21 Amp	Yey
BUR2 7303-XUIB1	Current battery of BUR2	1.5%(10%=100A)*	11000	Yey
BUR2 7303 -XUUB	Voltage battery of BUR2	110%(10%=10V)	1101	YSE1

<sup>\*</sup> Readings are dependent upon charging condition of the battery.

BUR3 (Condition: Switch off all the load of BUR 3, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed set value by the firm	Monitored value	Value under limit (Yes/No)
BUR3 7303-XUUN	Input voltage to BUR3	75% (10%=125V	10024	Yay
BUR3 7303- XUUZ1	DC link voltage of BUR3	60% (10%=100V)	637V	Yey
BUR3 7303-XUIZ 1	DC link current of BUR3	1% (10%=50A)*	7 Boul	(c)
BUR3 7303-XUILG	Current battery charger of BUR 3	3% (10%=100A)*	2180	Yey
BUR3 7303-XUIB1	Current battery of BUR 3	1.5%(10%=100A)*	1/Ami	Pey
BUR3 7303-XUUB	Voltage battery of BUR 3	110%(10%=10V)	1100	Ye

\* Readings are dependent upon charging condition of the battery.

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42029

Type of Locomotive: WAP-7/WAG-9HC Page: 20 of 27

DOC.NO.F/EUS/UI

(Ref: WI/ECS/10)

e hecken

5.3.3 Performance of BURs when one BUR goes out

When any one BUR goes out then rest of the two BURs should take the load of all the auxiliaries at ventilation level 3 of the locomotive

	ntilation level 3 of the lo	Loads in BUR2	Loads in BUR3
BURs	Eddus Oil DOIL		
All BURs OK	Oil Cooling unit 1&2	TM blower1&2, TFP oil pump 1&2, SR coolant pump 1&2.	Compressor 1&2, Battery charger and TM Scavenger blower 1&2
BUR 1 out		Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2,TFP oil pump 1&2, SR coolant pump 1&2 and Battery. charger.
BUR 2 out	Oil Cooling unit 1&2, TM blower 1&2, TM Scavenger blower 1&2	•	Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.
BUR 3 out	Olf Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.	

5.4 Auxiliary circuit 415/110

For checking earth fault detection, make a connection between wire no. 1218 and vehicle body. On switching on VCB, Earth fault relay 89.5 must pick up and after 3 minutes a message will come in the Diagnostic display that Earth Fault 415/110V Circuit

Switch on the 1 ph. auxiliary equipment one by one. Check the direction of rotation of each

Name of the auxiliary machine	Typical phase current	Measured phase current	Measured starting current
Machine room blower 1	15.0 amps*	4.0	16.0.
Machine room blower 2	15.0 amps*	4.1	15.0
Sc. Blower to MR blower 1	1.3 amps	1.5	4.1
Sc. Blower to MR blower 2	1.3 amps	1.2	2.3
Ventilator cab heater 1	1.1 amps	2.4	2.6
Ventilator cab heater 2	1.1 amps	2.4	2.6
Cab heater 1	4.8 amps	5.0	5.1
Cab heater 2	4.8 amps	50	5.1

For indigenous MR blowers.

Effective Date: Feb 2022

Doc.No.F/ECS/07 (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42,22

Type of Locomotive: WAP-7/WAG-9HC

Page: 21 of 27

## 5.5 Hotel load circuit (Not applicable for WAG-9HC)

For WAP-7 locomotive with Hotel load converter refer to Annexure-HLC

## 5.6 Traction Converter Commissioning

### This test is carried out in association with Firm.

Traction converter commissioning is being done one at a time. For testing Converter 1, switch off the traction converter 2 by switch bogie cut out switch 154. For testing Converter 2, switch off the traction converter 2 by switch bogie cut out switch 154. Isolate the harmonic filter also by switch 160. Start up the loco by one converter. Follow the functionality tests.

#### For Converter 1

Test Function	Results desired	Result obtained
Measurement of charging and pre-charging and charging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheeked oc
Measurement of discharging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	charkelok
Earth fault detection on positive potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checkelok
Earth fault detection on negative potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	CheekeLok
Earth fault detection on AC part of the traction circuit of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheaked on
Pulsing of line converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Checkesok
Pulsing of drive converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Cheecedola

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC Page: 22 of 27

### For Converter 2

For Converter 2	I Decelle decined in company	Result obtained
Test Function	Results desired in sequence	Result obtained
Measurement of charging and pre-charging and charging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Cheeked ok
Measurement of discharging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Cheered 6 le
positive potential of DC Link of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Cheekes ola
negative potential of DC Link of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/v	cheerelor
AC part of the traction circuit of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Checicedola
of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Checkesok
Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Cheekesolv

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC

Page: 23 of 27

# 5.7 Test protective shutdown SR

Test Function	Results desired in sequence	Result obtained
Measurement of protective shutdown by Converter 1 electronics.	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Remove one of the orange fibre optic feedback cable from converter 1Check that converter 1 electronics produces a protective shut	
	down.  • VCB goes off  • Priority 1 fault mesg. on DDU appears  **Disturbance in Converter 1	Cheekesok
Measurement of protective shutdown.	Start up the loco with both the converter. Raise panto. Close VCB.	·
by Converter 2 electronics.	Move Reverser handle to forward or reverse. Remove one of the orange fibre optic feedback cable from converter 2. Check that converter 2 electronics produces a protective shut	eneckes or
	<ul> <li>down.</li> <li>VCB goes off</li> <li>Priority 1 fault mesg. on diagnostic display appears</li> <li>Disturbance in Converter 2</li> </ul>	

## 5.8 Test Harmonic Filter

Switch on the filter by switch 160

Test Function	Results desired in sequence	Result obtained	
currents ,	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Apply a small value of TE/BE by moving the throttle.  • FB contactor 8.41 must open.	Checkedor	

Doc:No.F/ECS/01 (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 4 Lo 22

Type of Locomotive: WAP-7/WAG-9HC

Page: 24 of 27

·	• FB contactor 8.2 must close.	
•	<ul> <li>◆ FB contactor 8.1 must close</li> </ul>	
	<ul> <li>Check the filter current in diagnostic laptop</li> </ul>	
i ,	Bring the TE/BE throttle to O	
الي	Switch off the VCB	cheehed ak
¥	• FB contactor 8.1must open.	
	• FB discharging contactor 8.41	[]
	must close	
	<ul> <li>Check the filter current in</li> </ul>	
· ·	diagnostic laptop	γ
Test earth fault	Make a connection between wire.	
detection harmonic	no. 12 and vehicle body. Start up	·
filter circuit.	the loco. Close VCB.	a .
	• Earth fault relay 89.6 must pick up.	uncelled old
	Diagnostic message comes that -	
	Earth fault in harmonic filter circuit	
Test traction motor	Traction converter manufacturer	
speed sensors for	to declare the successful operation	CANK .
both bogie in both	and demonstrate the same to the	(, ,
cabs	supervisor/ PLW ,	<u>;</u>

# 5.9 Test important components of the locomotive

Items to be tested 🛷	Description of the test	Monitored value/remark	
Speedometer	VCU converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/ PLW	Cheeked ok	
Time delay module of MR blower	The time after which the starting capacitor for MR blower should go off the circuit should be set to 10-12 seconds	Cheekes	
Ni-Cd battery voltage	At full charge, the battery voltage should be 110V DC.	Checkelok	
Flasher light	From both cab flasher light should blink at least 65 times in one minute.	Cheelaedok	
Head light	Head light should glow from both cabs by operating ZLPRD. Dimmer operation of headlight should also occur by operating the switch ZLPRD.	cheared or	

L1

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

# Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC

Page: 25 of 27

Marker light	Both front and tail marker light should glow from both the cabs	Cheeked 6k
Cab Light	Cab light should glow in both the cabs by operating the switch ZLC	Checkelok
Spot lights	Both Drivers and Asst. Drivers Spot light should glow in both cabs by operating ZLDD	checkedok
Instrument lights	Instrument light should glow from both cab by operating the switch ZLI	checked or
Illuminated Push button	All illuminated push buttons should glow during the operation	Cheekelok
Contact pressure of the high rating contactors	The contact pressure of FB contactors (8.1, 8.2) is to be measured  Criteria:  The minimum contact pressure is 54 to 66  Newton.	For contactor 8.1:
rew Fan	All crew fans should work properly when VCB of the loco is switched on. The airflow from each cab fan is to be measured.  Criteria:  The minimum flow of air of cab fan should be 25 m <sup>3</sup> /minute	Cab 1 LHS: Cab 1 RHS: Cab 2 LHS: Cab 2 RHS:

# 6.0 Running Trial of the locomotive

SN	Description of the items to be seen during trail run	Action which should take place	Remarks
1	Cab activation in driving mode	No fault message should appear on the diagnostic panel of the loco.	cheche)
	Loco charging	Loco to be charged and all auxiliaries should run.  No fault message to appear on the diagnostic panel of the loco. Raise MR pressure to 10 Kg/cm <sup>2</sup> , BP to 5 Kg/cm <sup>2</sup> , FP to 6 Kg/cm <sup>2</sup> .	cheekes
3.	Check function of Emergency push stop.	This switch is active only in activated cab. By pushing this switch VCB should open & pantograph should be lowered.	Cheeke
4.	Check function of BPCS.	<ul> <li>Beyond 5 kmph, press BPCS, the speed of loco should be constant.</li> <li>BPCS action should be cancelled by moving TE/BE throttle, by dropping BP below 4.75 Kg/cm<sup>2</sup>, by pressing BPCS again.</li> </ul>	Cheekes 0 1c
5.	Check train parting operation of the Locomotive.	Operate the emergency cock to drop the BP Pressure LSAF should glow.	Cheeke

Signature of the JE/SSE/Loco Testing

ok

## Doc.No.F/ECS/01 (Ref: WI/ECS/10)

# PATIALA LOCOMOTIVE WORKS, PATIALA

# <u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u> <u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42022

Type of Locomotive: WAP-7/WAG-9HC

Page : 26 of '27

		·	<del></del>
6.	Check vigilance	Set the speed more than 1.5 kmph and ensure that	
	operation of the	brakes are released i.e. BC < 1 Kg/cm <sup>2</sup> .	
1.	locomotive	For 60 seconds do not press vigilance foot switch or	
	No.	sanding foots switch or TE/BE throttle or BPVG	
	,"	switch then	6
		Buzzer should start buzzing.	
		LSVW should glow continuously.	
	·	Do not acknowledge the alarm through BPVG or	checked
		vigilance foot switch further for 8 seconds then:-	OR
		Emergency brake should be applied	
	,	automatically.	
		VCB should be switched off.	$\Lambda$
· ·		Resetting of this penalty brake is possible only after	
	;	32 seconds by bringing TE/BE throttle to 0 and	
		acknowledge BPVR and press & release vigilance	
<u> </u>		foot switch.	<u>」</u>
7.	Check start/run interlock	• At low pressure of MR (< 5.6 Kg/cm <sup>2</sup> ).	Checkesok
		With park brake in applied condition.	MA
		• With direct loco brake applied (BP< 4.75Kg/cm <sup>2</sup> ).	chenial
		• With automatic train brake applied (BP<4.75Kg/cm <sup>2</sup> ).	ak
	Agrico .	• With emergency cock (BP < 4.75 Kg/cm <sup>2</sup> ).	
8.	Check traction interlock	Switch of the brake electronics. The	7
		Tractive /Braking effort should ramp down, VCB	checkes
		should open and BP reduces rapidly.	014
9.	Check regenerative	Bring the TE/BE throttle to BE side. Loco speed	1 Cheekes
10.	braking.	should start reducing.	y olk
10.	Check for BUR	In the event of failure of one BUR, rest of the two	
	redundancy test at ventilation level 1 & 3 of	BURs can take the load of all the auxiliaries. For this	Checked
	loco operation	switch off one BUR.	p de
	oco operación	Auxiliaries should be catered by rest of two BURs.	
11.	Check the power	Switch off the 2 BURs; loco should trip in this case.	
,	converter	Create disturbance in power converter by switching	1
. [	isolation test	off the electronics. VCB should open and converter	( checke)
		should get isolated and traction is possible with	b of
		another power converter.	<u> </u>

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

## PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42029

Type of Locomotive: WAP-7/WAG-9HC

Page: 27 of 27

# 7.0 Final check list to be verified at the time of Loco dispatch

Condition /Operations of the following items are to be checked:

SN	item	Cab-1	Cab-2	Remarks
1	Head lights	ok	Gle	
2	Marker Red	ok	G.K	
3 -	Marker White	ok	ak	
4	Cab Lights	ok	GR	
5	Dr Spot Light	G/C	ck	4
6	Asst Dr Spot Light	ale	ok	checked working
7	Flasher Light	6k	øk	CARCACO COCHENTY
8	Instrument Lights	Blc	ok.	
9	Corridor Light	OK.	GR	
10	Cab Fans	do	dr	
11	Cab Heater/Blowers	de	6k	
12	All Cab Signal Lamps Panel 'A'	Gk.	6/e	

# Status of RDSO modifications

LOCO NO: 42022

Sn	Modification No.	Description	Remarks
1.	RDSO/2008/EL/MS/0357 Rev.'0' Dt 20.02.08	Modification in control circuit of Flasher Light and Head Light of three phase electric locomotives.	OK/Not Ok
2.	RDSO/2009/EL/MS/0377 Rev.'0' Dt 22.04.09	Modification to voltage sensing circuit in electric locomotives.	Ok/Not Ok
3.	RDSO/2010/EL/MS/0390 Rev.'0' Dt 31.12.10	three phase locomotives to improve reliability.	Ok/Not Ok
4.	RDSO/2011/EL/MS/0399 Rev.'0' Dt 08.08.11	Removal of interlocks of control circuit contactors no. 126 from MCPA circuit.	Ok/Not Ok
5.	RDSO/2011/EL/MS/0400 Rev.'0' Dt 10.08.11	KV, 70 sq mm cables and 2x2.5 sq mm cables housed in lower portion of HB2 panel and provision of Synthetic resin bonded glass fiber sheet for three phase locomotives.	OK/Not Ob
6.	RDSO/2011/EL/MS/0401 Rev.'0' Dt 10.08.11	Modification sheet for relaying of cables in HB-2 panel of three phase locomotives to avoid fire hazards.	OK/NOT UK
7.	RDSO/2011/EL/MS/0403 Rev.'0' Dt 30.11.11	Auto switching of machine room/corridor lights to avoid draining of batteries in three phase electric locomotives.	OK/NOT OK
8.	RDSO/2012/EL/MS/0408 Rev.'0'	assembly.	QK/Not OK
9.	RDSO/2012/EL/MS/0411 Rev.'1' dated 02.11.12	White and Red marker light in three phase electric locomotives.	OK/Not Ok
10	RDSO/2012/EL/MS/0413 Rev.'1' Dt 25.04.16	contactors of three phase locomotives to improve reliability	OK/NOL OK
11	RDSO/2012/EL/MS/0419 Rev.'0' Dt 20.12.12	Modification sheet to provide rubber sealing gasket in Master Controller of three phase locomotives.	Qk/Not Ok
12	RDSO/2013/EL/MS/0420 Rev.'0' Dt 23.01.13	Modification 'sheet to provide mechanical locking arrangement in Primary Over Current Relay of three phase locomotives.	QK/Not Ok
13	RDSO/2013/EL/MS/0425 Rev.'0' Dt 22.05.13	Modification sheet for improving illumination of head light in dimmer mode in three phase electric locomotives.	Øk/Not Ok
14	RDSO/2013/EL/MS/0426 Rev.'0' Dt 18.07.13	Modification sheet of Bogie isolation rotary switch in three phase electric locomotives.	Øk/Not Ok
•	RDSO/2013/EL/MS/0427 Rev.'0' Dt 23.10.13	Modification sheet for MCP control in three phase electric locomotives.	Øk/Not Ok
16	RDSO/2013/EL/MS/0428 Rev.'0' Dt 10.12.13	Modification sheet for relocation of earth fault relays for harmonic filter and hotel load along with its resistors in three phase electric locomotives.	Øk/Not Ok
17	RDSO/2014/EL/MS/0432 Rev.'0' Dt 12.03.14	Removal of shorting link provided at c-d terminal of over current relay of three phase electric locamotives	Øk/Not Ok
18		filter ON (8.1)/adoption (8.2) Contactor in GTO/IGBT locomotives.	Ok/Not Ok
19 20		Modification in blocking diodes to improve reliability in three phase electric locomotives.	Øk/Not Ok
20	RDSO/2018/EL/MS/0475 Rev.'0'	Modification in existing Control Electronics (CE) resetting scheme of 3 phase electric locomotives.	Øk/Not Ok

Signature of JE/SSE/ECS

Loco No.: 42022

# PLW/PATIALA

# PNEUMATIC TEST PARAMETERS OF 3-PHASE ELECTRIC LOCOMOTIVES

(As per DG/RDSO/LKO's letter No.-EL/3.2.19/3phase, dated-29.03.2012)

SN	Parameters	Reference	Value	Result
	Brake Panel: M/s Knorr			
1.0	Auxiliary Air supply system (Pantograph & VCB)			
1.1	Ensure, Air is completely vented from pantograph			0
	Reservoir (Ensure Panto gauge reading is Zero)			
1.2	Turn On BL Key. Now MCPA starts.		60 sec. (Max.)	
	Record pressure Build up time (8.0 kg/cm2)		120 sec (knorr)	118 sec
1.3	Auxiliary compressor safety Valve 23F setting	Faiveley Doc. No.	8.5±0.25kg/cm2	8.45 Kg/cm2
		DMTS-014-1, 8 CLW's	-	
		check sheet no.		
		F60.812 Version 2		
1.4	Check VCB Pressure Switch Setting	CLW's check sheet	Opens 4.5±0.15	4.45 Kg/cm2
		no. F60.812 Version 2	kg/cm2, closes	
			5.5±0.15 kg/cm2	5.45 Kg/cm2
1.5	Set pantograph Selector Switch is in Auto, Open pan-1&2 Is	olating Cocks & KABA co		1
1.6	Set Cab-1 Pan UP in Panel A.		Observed Pan-2	ОК
			Rises.	
1.7	Close Pan-2 isolating Cock		Panto-2 Falls Down	ОК
	Open Pan -2 isolating Cock		Panto-2 Rises	
1.8	Record Pantograph Rise time		06 to 10 seconds	8 Sec
1.9	Record Pantograph Lowering Time		06 to 10 seconds	9 Sec
1.10	Panto line air leakage		0.7 kg/cm2 in 5	0.25 kg/cm2
			Min.	in 5 Min.
1.11	High Reach Panto emergency test and reset.			ok
2.0	Main Air Supply System			
2.1	Ensure, Air is completely vented from locomotive. Drain	Theoretical		
	out all the reservoirs by opening the drain cocks and then	calculation and		
	closed drain cocks. MR air pressure build up time by each	test performed by		
	compressor from 0 to 10 kg/cm2.	Railways.	·\ ¬ · ва	
	i) with 1750 LPM compressor		i) 7 mins Max.	6 min. &
	ii) with 1450 LPM compressor		ii) 8.5 mins Max.	50 sec.
2.2	Drain air below MR 8 kg/cm2 to start both the		Check Starting of	ok
	compressors		both compressors	
2.3	Drain air from main reservoir up to 7 kg/cm2. Start		30 Sec. (Max)	CP2-28 -Sec
	compressors, Check pressure build time of individual			
	compressor from 8 kg/cm2 to 9 kg/cm2			CP2-29- Sec
2.4	Check Low MR Pressure Switch Setting (37)	D&M test spec.	Closes at 6.40±0.15	6.50 Kg/cm2
		MM3882 &	kg/cm2 Opens at	
		MM3946	5.60±0.15kg/cm2	5.50 Kg/cm2
2.5	Check compressor Pressure Switch RGCP setting (35)	D&M test spec.	Opens at 10±0.20	10.0 Kg/cm2
		MM3882 &	kg/cm2, Closes at	
		MM3946	8±0.20 kg/cm2	8.0 Kg/cm2
2.6	Run both the compressors Record Pressure build up time	Trial results	3.5 Minutes Max.	3.45 minute

# PLW/PATIALA

Loco No.: 42022

2.7	Check unloader v	alve operation time				Approx. 12 Sec.	11sec
2.8	Check Auto Drain	Valve functioning (1	24 & 87)			Operates when Compressor starts	ok
2.9	Check CP-I delive Direct by BLCP.	ry safety valve settin	g (10/1). Run CP	D&M test spec. MM3882 & MM3946		11.50±0.35 kg/cm2	11.5 Kg/cm2
2.10	Check CP-2 delive direct by BLCP	ery safety valve settir	ng (10/2). Run CP		est spec. & MM3946	11.50±0.35 kg/cm2	11.50 Kg/cm2
2.11		compressors and ensoressure 1.2 kg/cm2			est spec. & MM3946		
2.12	by drain cock of 1	ch 'OFF' compressor I" Main Reservoir, St ssure of Duplex Chec	art Compressor,	CLW's chec F60.812 Ve	ck sheet no. ersion 2	5.0±0.10kg/cm2	5.0 Kg/cm2
2.13	FP pressure: Fit Test Gauge in 136F. Check press	Test point 107F FPTF sure in Gauge.	. Open isolate cock	CLW's chec F60.812 Ve	ck sheet no. ersion 2	6.0±0.20kg/cm2	6.0 Kg/cm2
3.0	Air Dryer Opera	ntion					
3.1		90 of 2 <sup>nd</sup> MR to start eck Air Dryer Towers				Tower to change every minute	ok
3.2	Check Purge Air S						
3.3	Check condition of			Blue	Blue		
4.0	Main Reservoir L	eakage Test					
4.1	Put Auto Brake (A-9) in full service, Check MR Pressure air leakage from both cabs.			est spec. & MM3946	Should be less than 1 kg/cm2 in 15 minutes	0.4 Kg/cm2 in 15 minutes	
4.2	Check BP Air leak	age			est spec. & MM3946	0.15 kg/cm2 in 5 minutes	0.05 Kg/cm2 in 5 minutes
5.0	Brake Test (Aut	omatic Brake oper	ation)				
5.1	Record Brake Pip	e & Brake Cylinder p	ressure at Each Step				
	Check proportionality of Auto Brake system  Auto controller position BP Pressure kg/cm2			ck sheet no. Version 2			
			BC (WAG-9 Kg/cm2	9 & WAP-7)	BC (WAP-5) Kg/cm2		
		Value	Result	Value	Result	Value	Result
1	Run	5±0.1	5.0 Kg/cm2	0.00	0.00 Kg/ cm2	0.00	-
	Intial	4.60±0.1	4.6 Kg/cm2	0.40±0.1	0.40Kg/ cm2	0.75±0.15	-
	Full service	3.35±0.2	3.35 Kg/cm2	2.50±0.1	2.5Kg/ cm2	5.15±0.30	-
	Emergency	Less than 0.3	0.25 Kg/cm2	2.50±0.1	2.5Kg/ cm2	5.15±0.30	-

# PLW/PATIALA

Loco No.: 42022

F 2	D 11 1 DD 1 1 251 / 25	DOM	0.12	0.6
5.2	Record time to BP pressure drop to 3.5 kg/cm2 Ensure	D&M test spec.	8±2 sec.	9 Sec
	Automatic Brake Controller handle is Full Service from Run	MM3882 & MM3946		
5.3	Operate Asst. Driver Emergency Cock,	D&M test spec.	BP pressure falls	01/
		MM3882 & MM3946	to Below 2.5	ОК
F 4		01347   1   1   1	kg/cm2	4.25
5.4	Check brake Pipe Pressure Switch 69F operates	CLW's check sheet no.	Closes at BP	4.25
		F60.812 Version 2	4.05- 4.35	Kg/cm2
			kg/cm2	
			Opens at BP	
			2.85- 3.15	3.0
			kg/cm2	Kg/cm2
5.5	Move Auto Brake Controller handle from Running to	D&M test spec.		
	Emergency BC filling time from 0.4 kg/cm2 i.e. 95% of	MM3882 & MM3946		
	Max. BC developed			
	WAP5 – BC 5.15 $\pm$ 0.3 kg/cm2 apply time		4±1 sec.	
	WAP7 - BC 2.50 ± 0.1 kg/cm2		7.5±1.5 sec.	
	WAG9 - BC 2.50 ± 0.1 kg/cm2		21±3 sec.	20 sec.
5.6	Move Auto Brake Controller handle to full service and	D&M test spec.		
	BP pressure 3.5 kg/cm2. Move Brake controller to	MM3882 & MM3946		
	Running position BC Release time to fall BC Pressure up			
	to 0.4 kg/cm2 i.e. 95% of Max. BC developed			
	BC release Time			
	WAP7		17.5±25 sec.	
	WAG9		52±7.5 sec.	55 sec.
5.7	Move Auto Brake Controller handle to Release, Check	CLW's check sheet no.	60 to 80 Sec.	78 Sec
	BP Pressure Steady at 5.5± 0.2 kg/cm2 time.	F60.812 Version 2		
5.8	Auto Brake capacity test : The capacity of the A9 valve	RDSO Motive power	BP pressure	
	in released condition must conform to certain limit in	Directorate report no.	should not fall	
	order to ensure compensation for air leakage in the	MP Guide No. 11 July,	below 4.0	
	train without interfering with the automatic	1999 Rev.1	kg/cm2 with in	4.45
	functioning of brake.		60 Sec.	Kg/cm2
	* Allow The MR pressure to build up to maximum			
	stipulated limit.			
	* Close brake pipe angle cock and charge brake pipe to			
	5 kg/cm2 by A (Automatic brake controlling) at run			
	position.			
	* Couple 7.5 dia leak hole to the brake hose pipe of			
	locomotive. Open the angle cock for brake pipe.			
	The test shall be carried out with all the compressors in			
	working condition.			
5.9	Keep Auto Brake Controller (A-9) in Full Service. Press		BC comes to '0'	0
	Driver End paddle Switch (PVEF)		223323 60 0	
6.0	Direct Brake (SA-9)			
6.1	Apply Direct Brake in Full Check BC pressure			
5.1	WAG9/WAP7	CLW's check sheet no.	3.5±0.20 kg/cm2	3.60
	WAP5	F60.812 Version 2	5.15±0.3 kg/cm2	Kg/cm2
6.2	Apply Direct Brake, Record Brake Cylinder charging	D&M test spec.	8 sec. (Max.)	8 Sec
0.2	time	MM3882 & MM3946	o sec. (iviax.)	0 366
	unie	IVIIVI3002 & IVIIVI3940		

# **PLW/PATIALA**

Loco No.: 42022

6.3	Check Direct Brake Pressure switch 59 (F)	D&M test spec. MM3882 & MM3946	0.20±0.10 kg/cm2	0.20 kg/cm2	
6.4	Release direct brake & BC Release time to fall BC pressure up to 0.4 kg/cm2		10 -15 Sec.	14 Sec	
7.0	Modified System Software (only for CCB)				
7.1	Bail-off de-activated during emergency by any means	-		Now De- activated	
7.2	DPWCS and Non-DPWCS mode enabled		Multi Loco		
7.3	TCAS and Non-TCAS mode enabled		Not Yet Launched	Presently	
7.4	Penalty brake application deactivated for Fault code 113 (FC 113) and CCB health signal will not drop to avoid loco detention/failure. The Brake Electronics Failure "message will not generate on DDS.	DD00 letter ve	Pressure Setting Needed is12 kg/sqcm Causing mismatching with standard Pr Setting	- not happening in PLW	
7.5	CCB health signal logic revised (Now will remain high) for penalty condition occurring with FC 108 due to wrong operation/not affecting operation/ Not a CCB Fault (i.e Both controllers selected as LEAD etc) The Brake electronic failure message will not generate on DDS	RDSO letter no. EL/3.2.19/3-phase (CCB), dtd 30.01.2023		Brake electronic failure message not generate on DDS	
7.6	CCB health signal logic for FC 102 (In case of BC request from VCU is more than 90 %-above 9V DC) is changed i.e CCB health signal will not drop for FC 102 which will avoid loco detention/failure. The brake electronic failure message will not generate on DDS.		Could not performed by M/s Knorr	Presently not happening in PLW	
7.7	Booting time for CCB with TCAS/TPM/PTWS/DPWCS mode 15-20 sec. However, in case of absence of either one or both system booting time subsequently increased to 40-50 sec.			50 sec	
8.0	Sanding Equipment				
8.1	Check Isolating Cock-134F is in open position. Press sander paddle Switch. (To confirm EP valves Operates)		Sand on Rail	Ok	
9.0	Test Vigilance equipment : As per D&M test specification			Ok	

SAMSHER Digitally signed by SAMSHER SINGH SINGH BIST Date: 2025.03.17

BIST 11:31:04 +05'30'

Signature of SSE/Shop

	42022									
	Warranty									
S.No.	Description	PL NO.	QPL /Nos.	Supplier	Sr. no.	, , , , , , , , , , , , , , , , , , ,				
1	Pantograph	29880014(HR), 29880026	2	FAIVELEY, CONTRANSYS	N24-0833/DEC-2024, 15656-11/24					
2	Servo motor	29880026	2	CONTRANSYS	15664-11/24					
3	Air Intake filter Assly	29480103	2	PARKER	O/C 1573P/A/01 (PLW) 08/24, O/C 1657P/A/02 (PLW) 09/24					
4	Insulator Panto Mtg.	29810127	8	IEC	08-24, 08-24					
			MIDDLE RC	OF COMPONENT						
5	High Voltage Bushing	29731021	1	ELECTRANEX	EIPL-5976-01-25					
6	Voltage Transformer	29695028	1	CG POWER & INDUSTRIAL	243339-18/09/2024					
7	Vacuum Circuit Breaker	25712202	1	AUTOMETERS	AALN/10/2024/010/VCBA/718					
8	Insulator Roof line	29810139	9	MIL	05-2024, 06-2024, 07-2024					
9	Harmonic Filter	29650033	1	Daulat Ram	24J/RHFG/06/727-09/2024	AS Per PO/IRS Conditions				
10	Earth Switch	29700073	1	AUTOMETERS	AALN/09/2024/058/ES/414					
11	Surge Arrester	29750052	2	CG POWER & INDUSTRIAL	58328-2024, 58329-2024					
			Air B	rake Components						
12	Air Compressor (A,B)	29511008	2	ELGI	EXFS 923359 A, EXHS 923957 B					
13	Air Dryer	29162051	1	KNORR	E 24 E 0425					
14	Babby compressor	25513000	1	ELGI	BXFS 109 290					
15	Air Brake Panel	29180016	1	KNORR	24-11-CO-3864					
16	Contoller (A,B)	29180016	2	KNORR	24-11-FO-3926 A, 24-11-FO-3926 B					
17	Breakup Valve	29180016	2	KNORR						
18	wiper motor	29162026	4	AUTO INDUSTRY						

SAMSHER Digitally signed by SAMSHER SINGH BIST Date: 2025.03.20 15:57:08 +05'30' SSE/ABS

#### PLW/PTA

#### ELECTRIC LOCO HISTORY SHEET (ECS)

ELECTRIC LOCO NO: 42022 LIST OF ITEMS FITTED BY ECS **RLY: SCR** 

SHED: KZJL

PROPULSION SYSTEM: CGL

· · · · · · · · · · · · · · · · · · ·	DESCRIPTION OF ITEM	ITEM PL NO.	ITEM SR. NO C	AB-1/CAB-2	MAKE/SUPPLIER	
SN	DESCRIPTION OF THE STATE OF	29612937	4992	4912	POWER TECH	
	LED Based Flasher Light Cab I & II	29612925	142961/142866/1	42965/142925	MATSUSHI P. TECH.	
	Led Marker Light Cab I & II	29170011	3322	3228	KKI	
	Cab Heater Cab I & II	29470080	24100204/24100195/2	4100023/24100027	KAPSONS	
	Crew Fan Cab I & II	29470060	7220			
	Master Controller Cab I	29860015	722		WOAMA	
6	Master Controller Cab II			1636	KONTACT	
7	Complete Panel A Cab I & II	29178265	1602	251020	CGCP/CGL	
8	Complete Panel C Cab I & II	29170539	251019	1616	KONTACT	
9	Complete Panel D Cab I & II	29178265	1612		HIND	
10	Complete Cubicle- F Panel Cab I & II	29178162		GF2024M0274-915A GF2024M0274-915B		
11	Speed Ind.& Rec. System	29200040	6003/5		MEDHA	
1	Battery (Ni- Cd)	29680025	B-12	27		
13	Set of Harnessed Cable Complete	29600420			QUADRANT	
	Transformer Oil Pressure Sensor (Cab-1)		2835 Sep-24	2792 Sep-24	LAXVEN	
14	(Pressure Sensor Oil Circuit Transformer)	29500047		2364 Aug-24		
15	Transformer Oil Pressure Sensor (Cab-2)		2844 Sep-24			
16	Transformer Oil Temperature Sensor (Cab-1)	00500005	BG/TFP/880	)3 Aug-24	BG INDUSTRIES	
10	(Temperature Sensor Oil Circuit Transformer)	_ 29500035	BG/TFP/8960 Aug -24			
17			24L3	INTEC		
	Roof mounted Air Conditioner I	29811028		24L3520 24L3501		
19	Roof mounted Air Conditioner II		2420			

SSE/ECS

JERECS Perform

		LOCO NO- 42022/V				
S.No.	Equipment	PL No.		t Serial No.	Ma	ke
1	Complete Shell Assembly with piping	29171027	62/63	3, 01/25	ECBT	
2	Side Buffer Assly Both Side Cab I		1247, 07/24	1736, 11/24	KM	KM
3	Side Buffer Assly Both Side Cab II	29130050	1765, 11/24	1290, 07/24	KM	KM
4	CBC Cab I & II	29130037	122, 11/24	182, 11/24	FASP	FASP
5	Hand Brake		12/2	4-1101	Rising Eng	z. Concern
6	Set of Secondry Helical Spring	29045034 29041041			AB	
7	Battery Boxes (both side)	29680013	129, 01/25	113, 01/25	BHARTIA BRIGHT	BHARTIA BRIGH
8	Traction Bar Bogie I		8830	, 01/25	KI	M
9	Traction Bar Bogie II			, 01/25	KI	M
10	Centre Pivot Housing in Shell Bogie I side	20400057	246,	12/24	PE	PL
11	Centre Pivot Housing in Shell Bogie II side	29100057	241,	12/24	PE	PL
12	Elastic Ring in Front in Shell Bogie I side		1406	, 10/24	AVA	NDH
13	Elastic Ring in Front in Shell Bogie II side	29100010	1484	11/24	AVA	DH
14	Main Transformer	29731008 for WAG 9 29731057 for WAP-7	BHEL-65-10-24	-2058688, 2024	ВН	EL
15	Oil Cooling Radiator I		11/24, P1	124RC2373	FINE AUTOMO	TIVE PVT LTD
16	Oil Cooling Radiator II	29470031	10/24, 10	024RC2305	FINE AUTOMOTIVE PVT LTD	
17	Main Compressor I with Motor			957, 11/24	ELGi	
18	Main Compressor II with Motor	29511008		359, 09/24	ELGi	
19	Transformer Oil Cooling Pump I				FLOW	
20	Transformer Oil Cooling Pump II .		24081307, 08/23 24081343, 08/23		FLOWWELL	
21	Oil Cooling Blower OCB I				ACC	
		29470043		), LHP1001606104		
22	Oil Cooling Blower OCB II		09/24, 324093734, 32409AF3734		SAINI ELECTR	
23	TM Blower I	29440075	01/25, 24P5358/01, 24P5358AF01		SAINI ELECTR	
	TM Blower II			22, 24P4427AF22	SAINI ELECTR	
25	Machine Room Blower I	29440105		G, CGLXKCM11464	ACCEL	
26	Machine Room Blower II			), CGLXKCM11458	ACCEL	
27	Machine Room Scavenging Blower I	29440129	12/24, CF25/D	7354, D25-6982	SAMAL HARA	ND PVT LTD
28	Machine Room Scavenging Blower II	25440125	12/24, CF25/D	7338, D25-6966	SAMAL HARA	ND PVT LTD
29	TM Scavenging Blower Motor I	29440117	02/25, ST	Г-25.02.15	GTR CO	PVT LTD
30	TM Scavenging Blower Motor II	23440117	02/25, \$7	Г-25.02.78	GTR CO	PVT LTD
31	Traction Convertor I		01/25, CGP12	512454-P1146		x
	Traction Convertor II			512453-P1146		
	Vehicle Control Unit I	29741075		11389-P1146	co	SL.
	Vehicle Control Unit II			11390-P1146		
	Aux. Converter Box I (BUR 1)			12511564-P1146		
	Aux. Converter Box 2 (BUR 2 + 3)	20474400		22511564-P1146	CTECAL	IT LTD
	Axillary Control Cubical HB-1	29171180 29171192		10022410358 024/J/0178/666	STESAL HIND RECT	
_	Axillary Control Cubical HB-2 Complete Control Cubicle SB-1			24110900	HIND RECT	
_		29171209 29171210		624/11/2024	KAYSONS ELECT	
41	Complete Control Cubicle SB-2 .  Filter Cubical (FB) (COMPLETE FILTER  CUBICLES)	29480140		CFC/2408/82	KAPATRONI	
	Driver Seats	29171131	1/25-51.2	276,38,252	TARU	DEEP
	Transformer oil steel pipes	29230044		IT PIPES		
	Conservator Tank Breather	29731057		, 2058337	ANUSHF	REE LTD
				089, 0117	GF	
45	Ballast Assembly ( only for WAG-9) Head Light	29170163		, 0142	ENS	

NAME CHURNAM (MARM SSE/LAS

NAME LANIHERRATE MEENY JE/LAS/UF LAS

NAME AHUT OPPAL JE/LAS / UF Issue No. : 05 Effective Date: July-2023 DOC NO: F/LAS/Electric Loco CHECK SHEET (Ref: WI/LAS/Elect/01, 02, 03 & 04 & QPL/LAS/Elect. Loco)

Page 1 of 1

#### पटियाला रेलइंजन कारखाना, पटियाला PATIALA LOCOMOTIVE WORKS, PATIALA ELECTRIC LOCO CHECK SHEET

LOCO NO: 42022

Rly: S(R

Shed: KZJL

S. No.	ITEM TO BE CHECKED	Specified Value	0	bserved '	Value
1.1	Check proper Fitment of Hotel Load Converter & its output contactor.	OK	-	-NA	_
1.2	Check proper Fitment of MR Blower 1 & 2, MR Scavenging Blower 1 & 2, TM Blower 1 & 2, TMB Scavenging Blower 1 & 2.  TM scavenging blower 1 & 2 & Oil Cooling unit.	ОК		0/4	
1.3	Check proper of Fitment of oil cooling unit (OCU).	OK		0/4	
1.4	Check proper Fitment of HB 1 & 2 and its respected lower part on its position.	OK		OK	
1.5	Check proper Fitment of FB panel on its position.	OK		OK	
1.6	Check proper Fitment of assembled SB1 & SB2 panel.	OK		012	
1.7	Check proper Fitment of Auxiliary converter 1, 2 & 3-(BUR-1, 2 & 3).	OK		0/4	
1.8	Check proper Fitment of Traction converter 1 & 2 (SR-1 & 2).	OK		0/2	
1.9	Check proper fitment, torquing & Locking of Main Transformer bolt.	OK		11/4	
1.10	Check proper fitment of Main compressor both side with the compressor safety wire rope.	OK		OL	
1.11	Check proper resting of Secondary Helical Springs between Bogie & Shell body.	OK		0/2	
1.12	Check proper fitment of Bogie Body Safety Chains.	OK		OLL	
.13	Check proper fitment of Cow catcher.	OK		OF	3
1.14	Check coolant level in SR 1 & 2 Expansion Tank.	OK	ak		- 1
1.15	Check Transformer Oil Level in both conservators Tank (Breather Tank).	OK ·	014		
1.16	Check proper fitment and maintain required gaps from Loco Shell Body of all metallic pipes to avoid any damage during online working of Locomotives.	OK	OK		
1.17	Check proper fitment of both battery box.	OK	OLT.		
1.18	Check for any gap between Main Transformer mounting base & Loco Shell.	OK	Oll		
1.19	Check proper fitment of Push Pull rod its bolt torquing and fitment of fixing cable. As per Drg No 1209-01-113-001	OK		OK	
1.20	Secondary Vertical and Lateral Clearance on leveled track at the time of Loco Dispatch.		CAE	3-1	CAB-2
	ELRS/TC/ 0082 (Rev 1) dated 17.09.2015	Vertical-Std :35-60 mm	LP		LP ALP
		Lateral Std- 45-50 mm	4	A	8 30
1.21	Buffer height: Range (1090, +15,-5)	1085-1105		L/S	R/S
	Drg No IB031-02002.	mm	FRONT	1100	1105
			REAR	1100	
4.00	D ( ) 1 D ( ) 14 D ( ) 14 D ( ) 15 D ( )	0.44	NLAN		
1.22	Buffer Length: Range (641 mm + 3 to 10 mm with buffer face)  Drg No-SK.DL-3430.	641 mm	EDONIT	L/S	R/S
	Drg No-SK.DL-3430.		FRONT	GUS	
			REAR	644	644
1.23	Height of Rail Guard. (114 mm + 5 mm,-12 mm).	114 mm + 5		L/S	R/S
	As per RDSO Pamphlet Important Bogie Clearances of Electric Locomotives.	mm,-12 mm	FRONT	116	115
			REAR	116	114
1.24	CBC Height: Range (1090, +15,-5)	1090, +15	FRONT:		119
1.24	Drg No- IB031-02002.	-5 mm	REAR:	1096	

(Signature of SSE/Elect. Loco )

NAME SHUBHAN SHAPMA

DATE 28/02/25

(Signature of /JE/Elect Loco)

NAME Rawindra Kr Meina

DATE 28/02/25

(Signature of JE/UF)

NAME AMUIT UPPAL

DATE 28/ 32/25

#### **Loco No.** 42022

#### 1. BOGIE FRAME:

BOGIE	FRAME NO	Make	PL No.	PO No. & dt.	Warranty Period
FRONT	SL-289	ECBT	29100677	100360	As per PO/IRS
REAR	SL-2421	ACPL	29100677	100363	conditions

#### 2. Hydraulic Dampers (PL No.29040012) Make: ESCORT / ESCORT

#### 3. AXLES:

AXLE POSITION NO	1	2	3	4	5	6
MAKE/	PLW	PLW	PLW	PLW	PLW	PLW
S.NO	27765	27670	27536	27584	27922	27611
Ultrasonic Testing	OK	OK	OK	OK	OK	OK

#### 4. WHEEL DISCS NO. AND TYPE & BULL GEAR

AXLE POSITION NO	1	2	3	4	5	6
GEAR END	PLW24-088	CNC24-3349	CNC24-3487	CNC24-3172	CNC24-3913	CNC24-3211
Make	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED
FREE END	CNC24-3423	CNC24-3483	CNC24-3292	CNC24-3173	CNC24-3977	CNC24-3229
Make	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED
Bull Gear No.	17119	13609	13768	13021	24-D-1042	24-F-65
Bull Gear Make	GGAG	GGAG	GGAG	GGAG	KPCL	LMS

#### 5. AXLE ROLLER BEARING (CRU) (PL No. 29010020, Warranty: As per PO/IRS conditions)

	AXLE POSITION NO	1	2	3	4	5	6
Gear	MAKE	FAG	FAG	FAG	FAG	FAG	FAG
End	PO NO. & dt	02312	02312	02312	02312	02312	02312
Free	MAKE	FAG	FAG	FAG	FAG	FAG	FAG
End	PO NO. & dt	02312	02312	02312	02312	02312	02312

#### 6. WHEEL DISC PRESSING PRESSURE IN KN: (SPECIFIED 80-105 T)

AXLE POSITION NO	1	2	3	4	5	6
BULL GEAR END	96 T	80 T	90 T	832 KN	90 T	801 KN
FREE END	102 T	889 KN	85 T	785 KN	825 KN	93 T

#### Loco No. 42022

#### 7. DIAMETER AFTER PROFILE TURNING: SPECIFIED 1092 + .5 mm - 0 mm

AXLE POSITION NO	1	2	3	4	5	6
DIA IN mm GE	1092.5	1092.5	1092.5	1092.5	1092.5	1092.5
DIA IN mm FE	1092.5	1092.5	1092.5	1092.5	1092.5	1092.5
WHEEL PROFILE GAUGE (1596±0.5mm)	OK	OK	OK	OK	OK	OK

#### 8. SUSPENSION TUBE & ITS TAPER ROLLER BEARING:

AXLE POSITION NO		1	2	3	4	5	6
S.T. PL 29100288	MAKE	BSL	KPE	SDI	SDI	SDI	IN
GE Brg. PL 29030110	MAKE	NBC	NBC	NBC	NBC	NBC	NBC
FE Brg. PL 29030110	MAKE	NBC	NBC	NBC	NBC	NBC	NBC

#### 9. GEAR CASE (PL No. 29030018) & BACKLASH:

AXLE POSITION NO	1	2	3	4	5	6
MAKE	KM	KM	KM	KM	KM	KM
BACKLASH (0.254 – 0.458mm)	0.300	0.300	0.400	0.290	0.390	0.320

#### 10 A/BOX TO BOGIE FRAME LATERAL CLEARANCES (SPECIFIED 15.0 to 19.0mm):

AXLE POSITION NO	1	2	3	4	5	6
RIGHT SIDE	15.32	16.42	16.31	17.23	16.10	15.61
LEFT SIDE	16.22	16.25	15.47	17.10	15.52	15.42

#### 11. TRACTION MOTOR: (PL No.29940606, Warranty: As per PO/IRS conditions)

AXLE POSITION NO	MAKE	PO No. & Date	S. NO.
1	TITAGARH	102213	6FRA24230
2	TITAGARH	102213	6FRA24193
3	TITAGARH	102213	6FRA24194
4	TMS		PLW-2982
5	CGP	102027	2242001-7634
6	TMS		PLW-2919


JE/SSE/ Bogie Shop




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 29.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

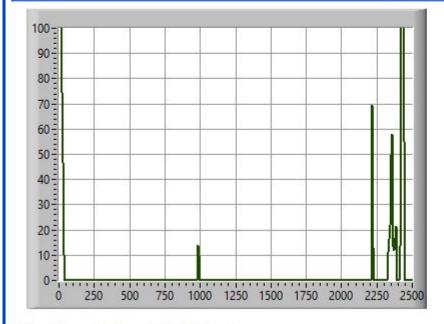

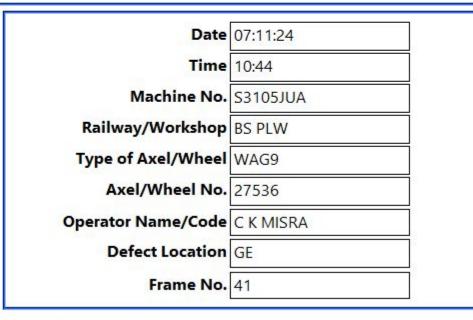


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 29.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

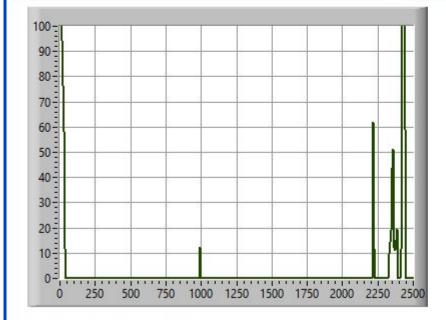

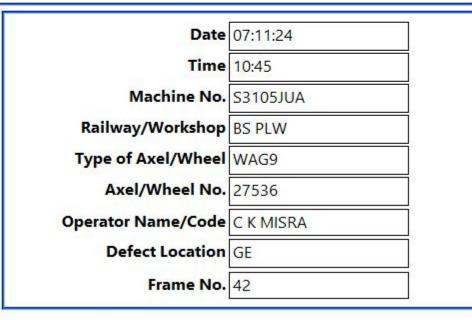


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 29.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

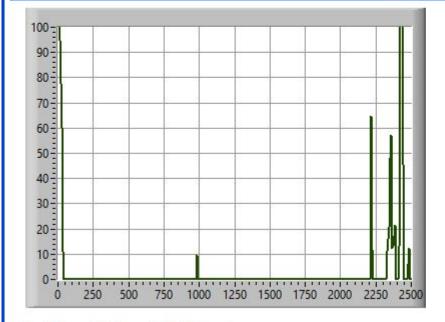

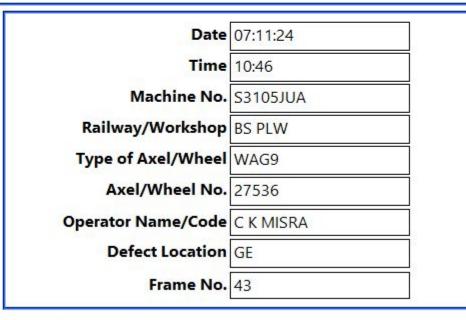


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 29.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

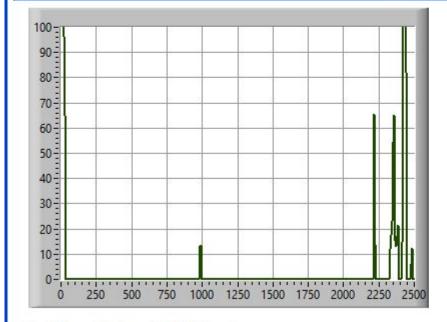

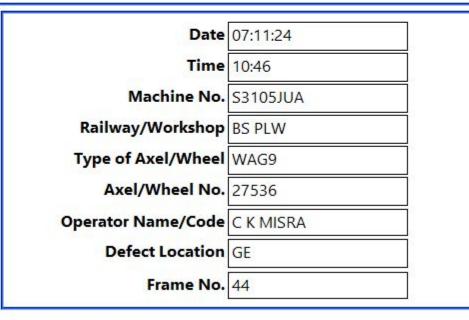


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 46.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

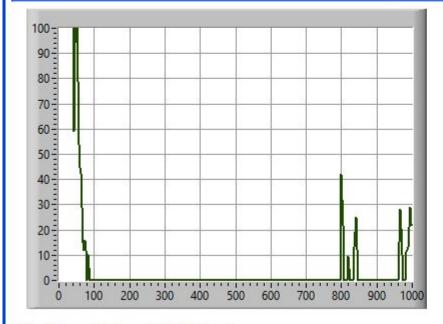

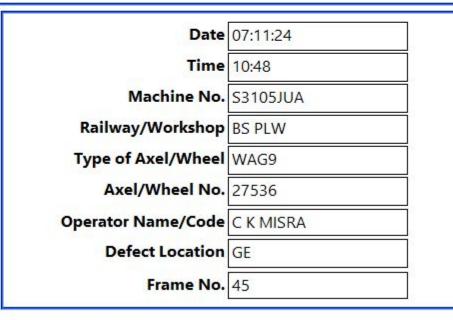


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 46.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

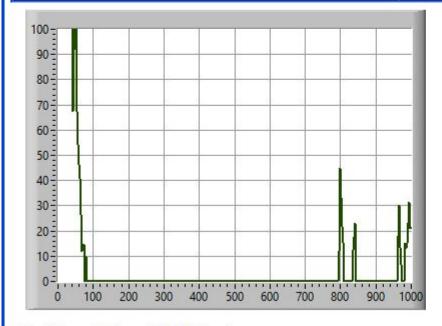

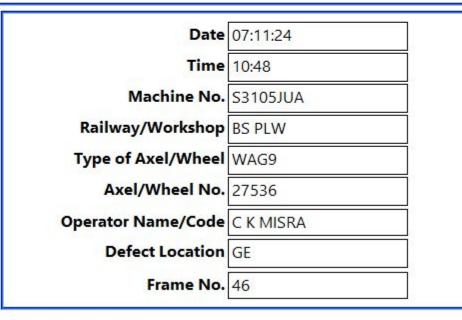


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 46.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

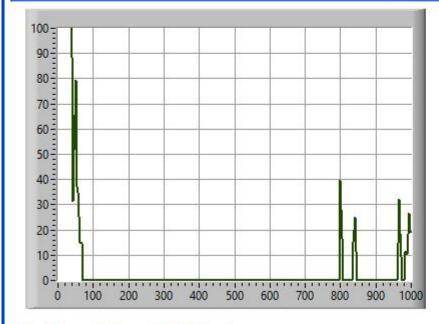

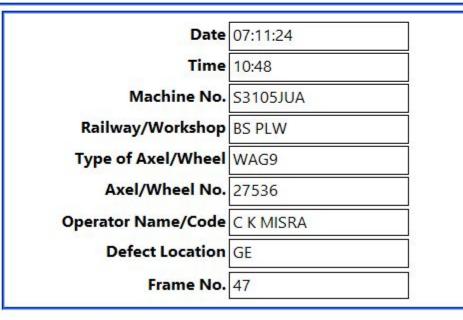


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 46.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

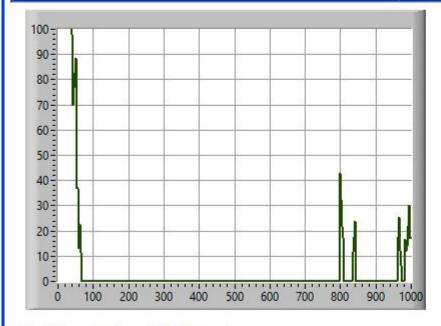

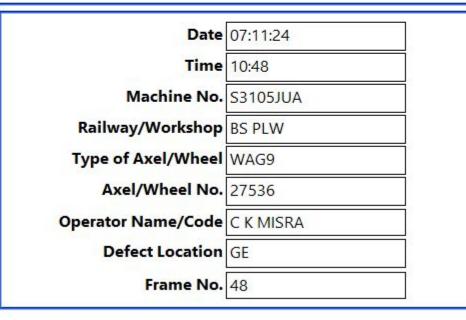


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 46.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

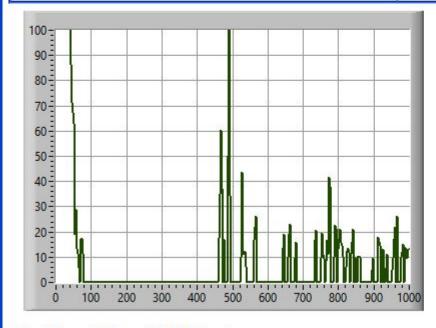

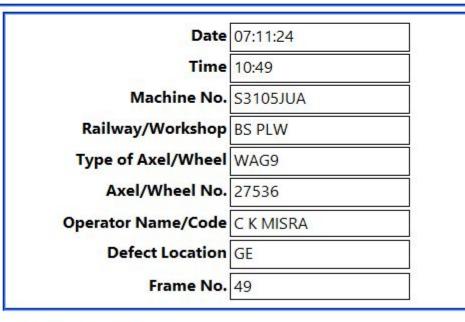


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 46.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

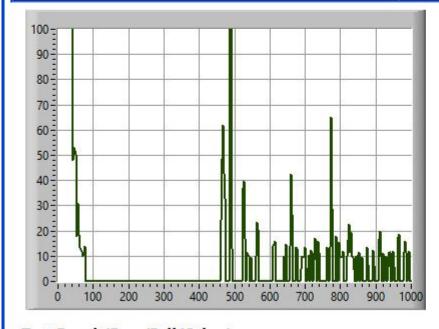

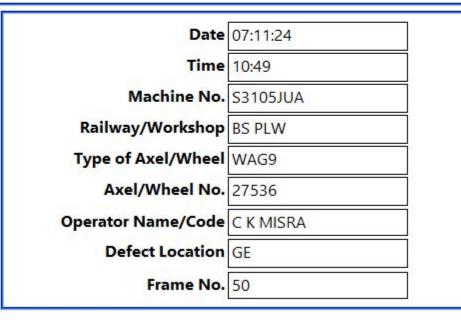


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 46.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

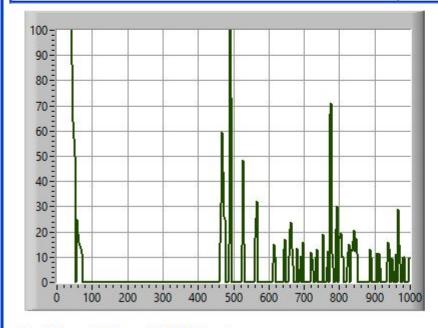

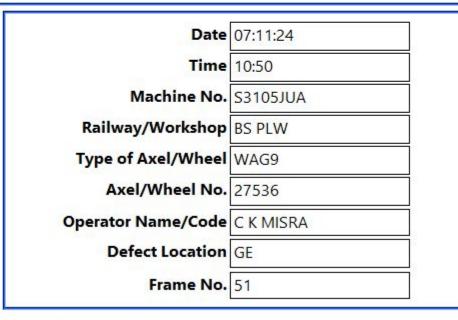


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 46.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

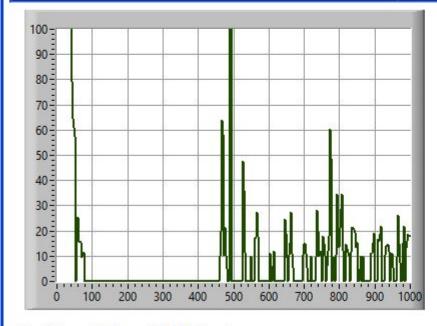

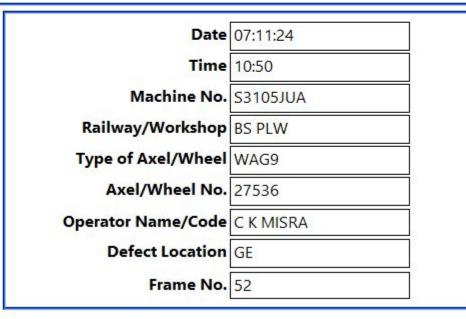


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

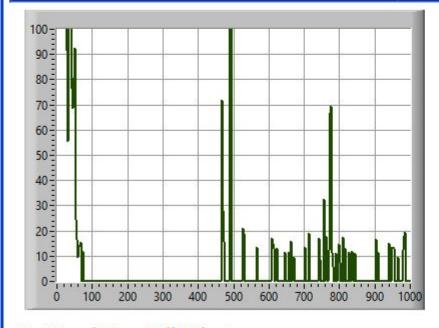

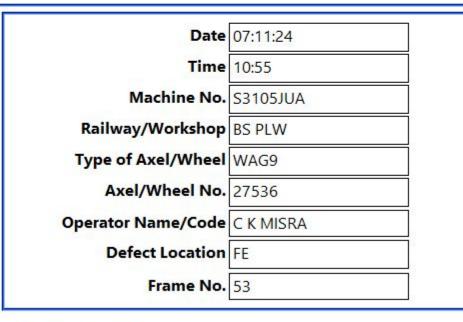


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	: 9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

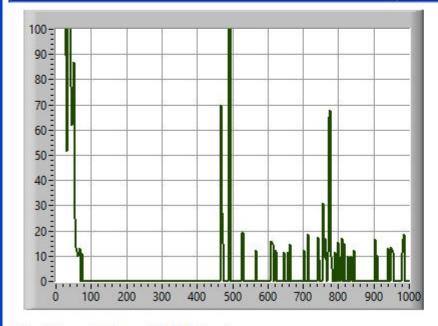

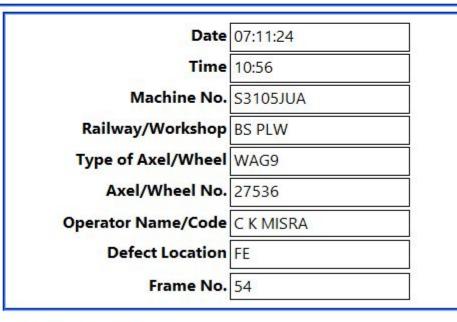


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

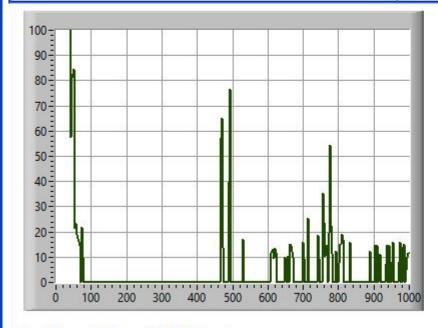

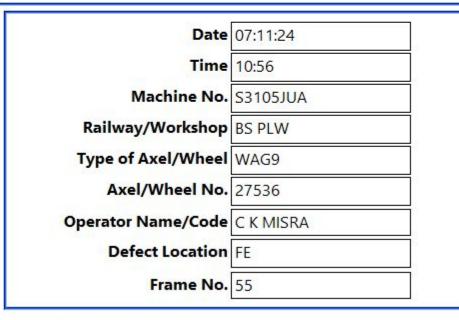


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

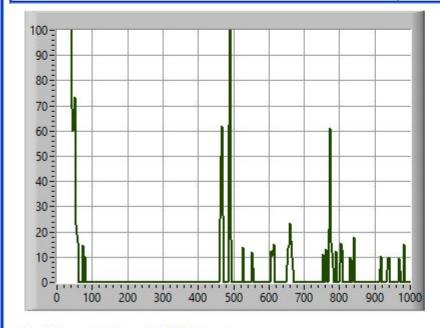

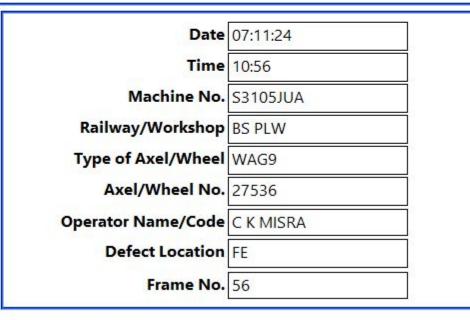


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 31.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

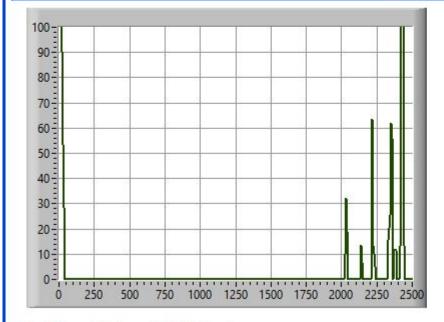

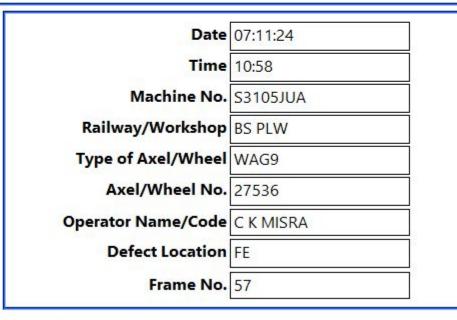


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 31.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

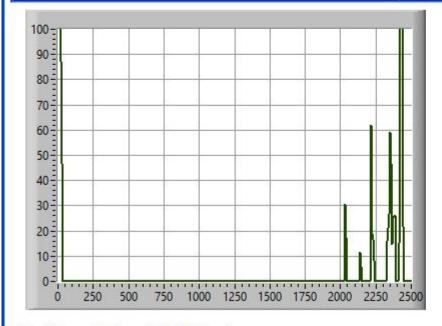

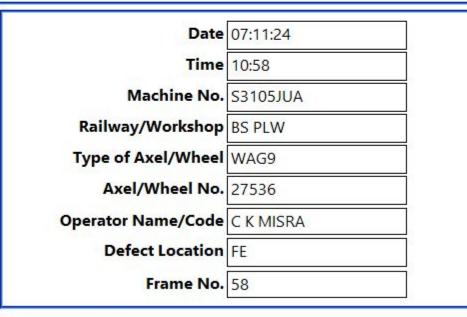


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 31.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

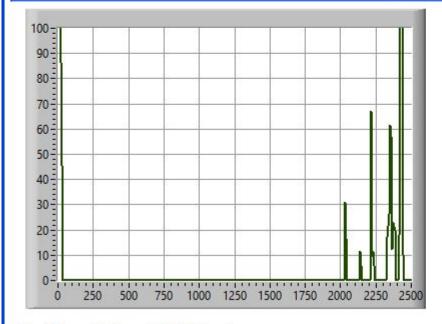

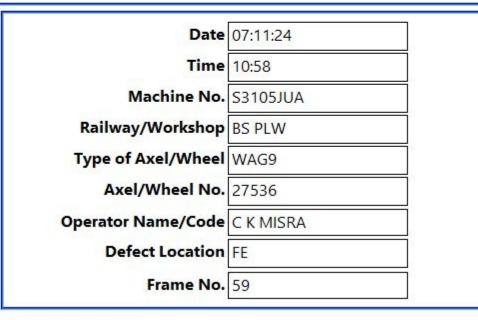


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 08-Nov-24 TIME: 8:57 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 31.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

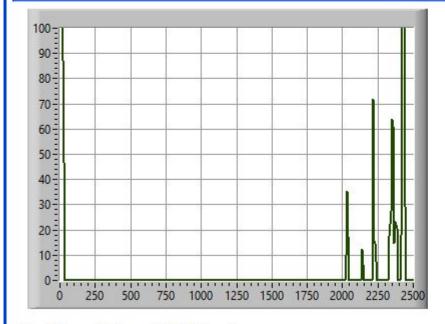

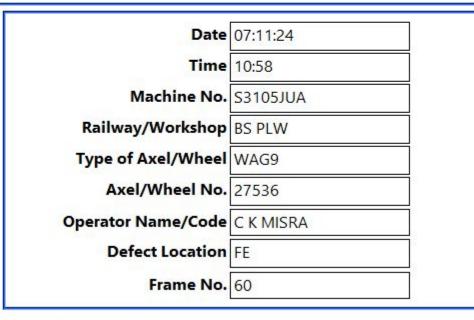


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 35.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

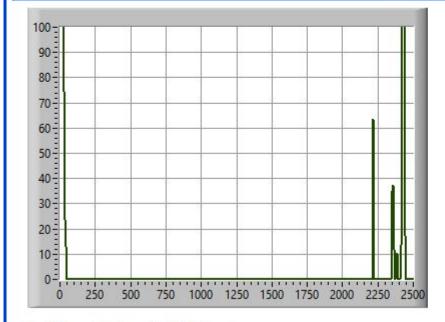

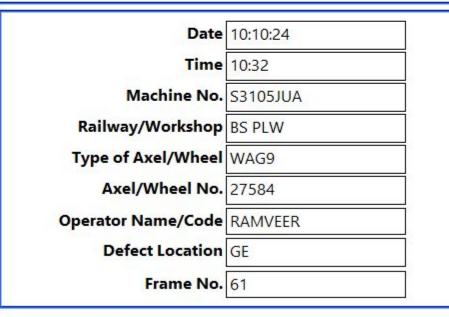


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 35.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

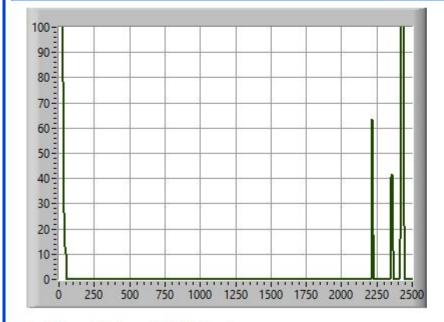

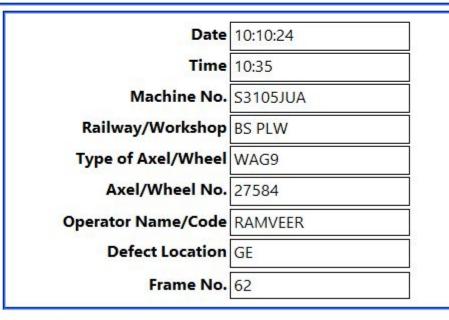


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Param	neters		Gate Measure				
Gain	: 35.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

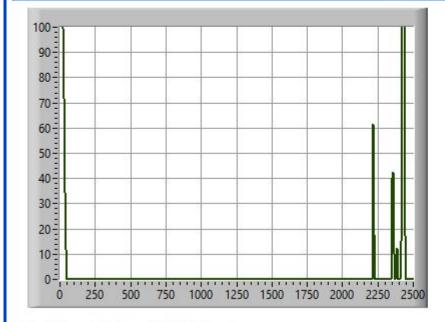

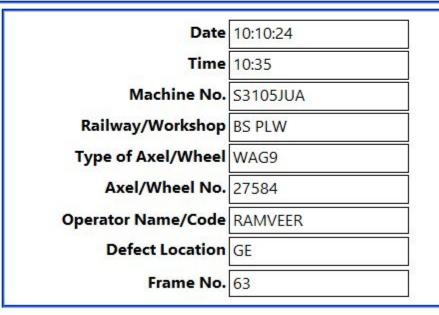


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 35.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

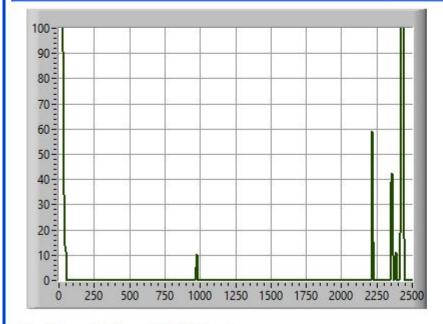

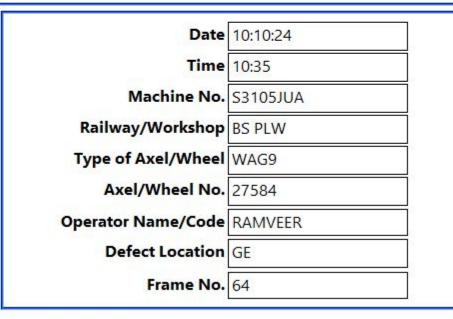


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

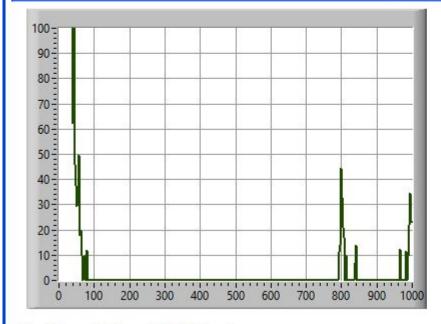

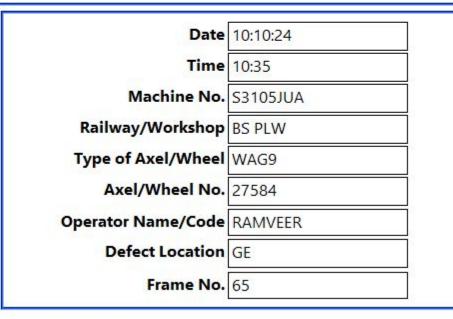


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

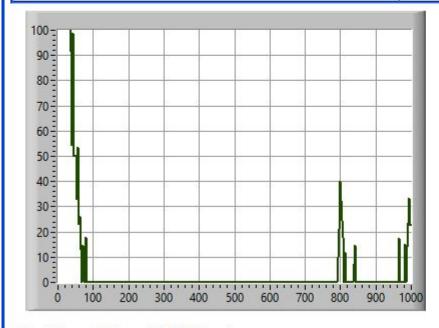

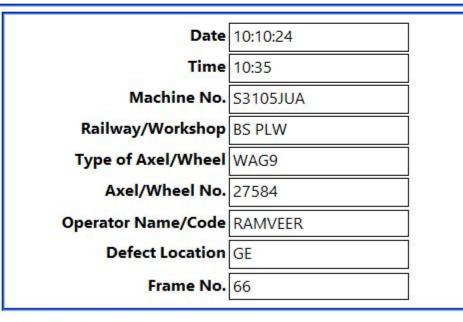


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

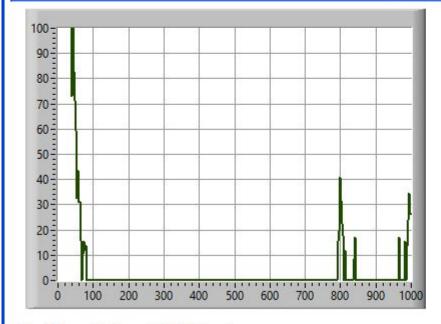

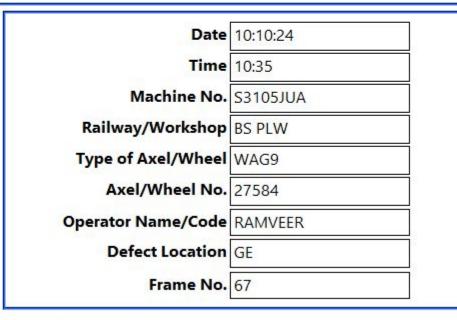


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

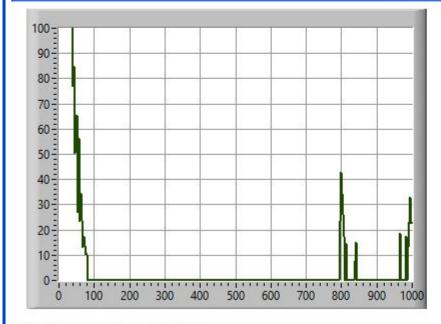

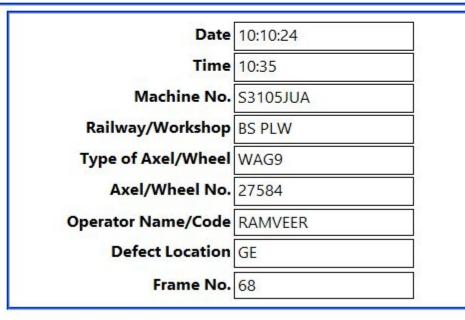


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

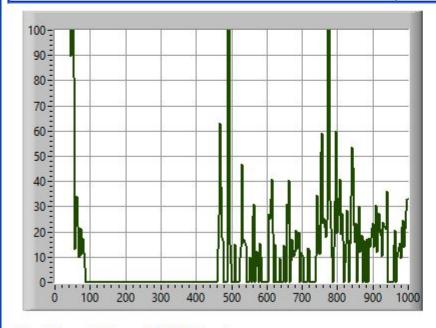

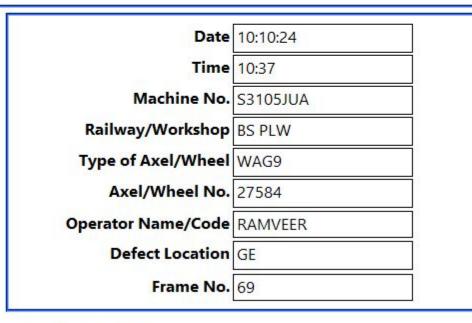


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

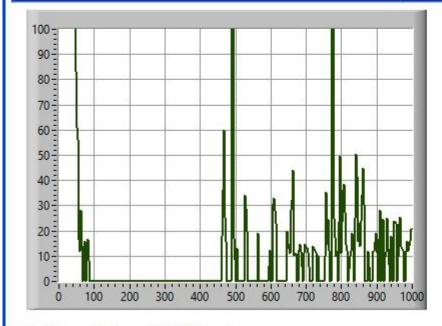

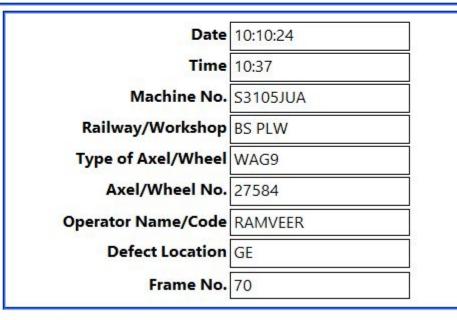


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

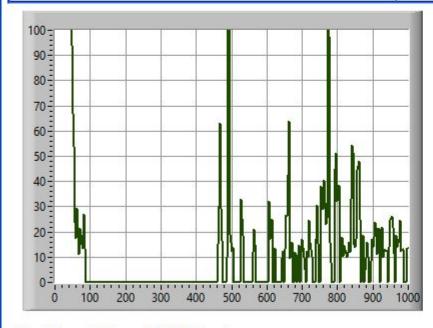

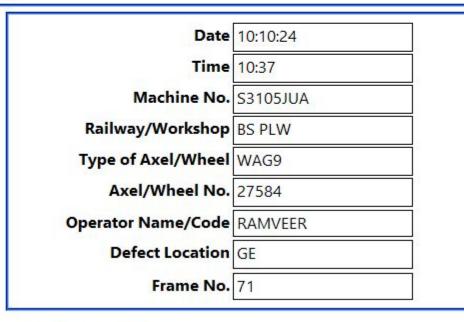


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

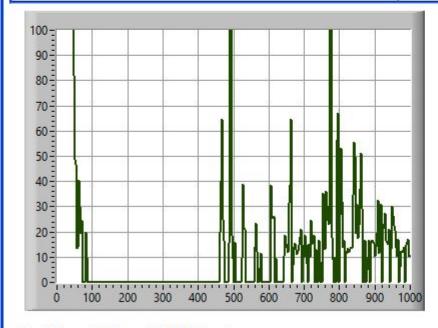

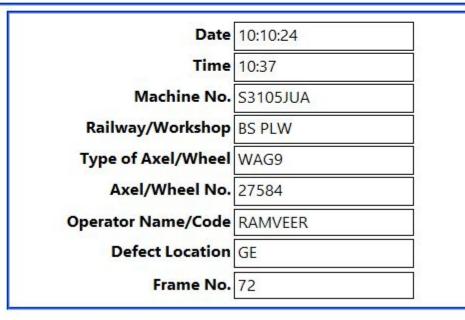


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

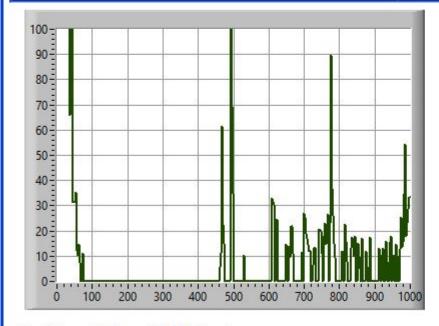

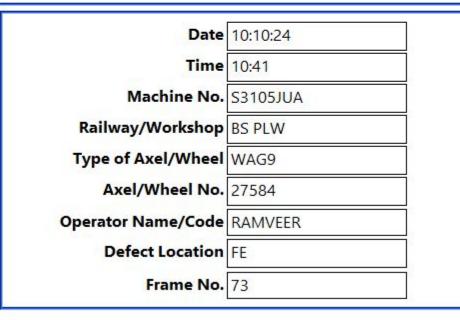


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

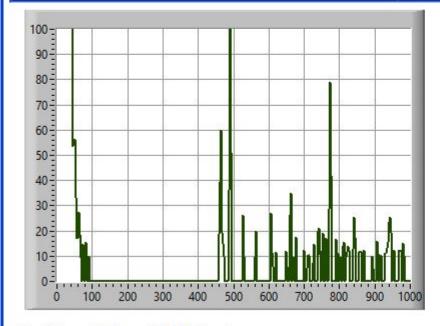

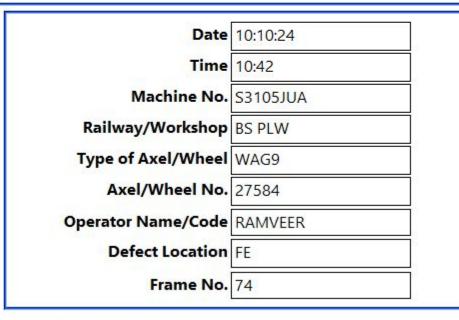


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

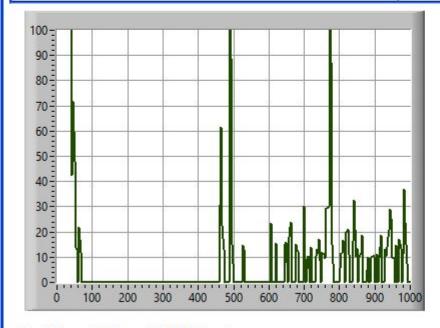

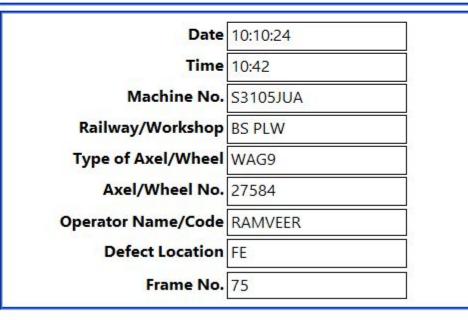


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

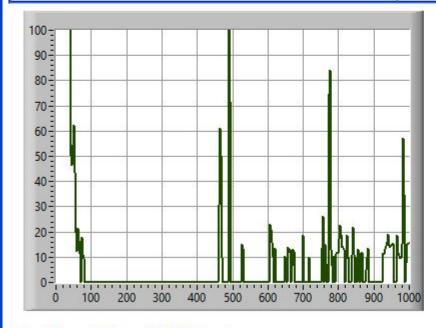

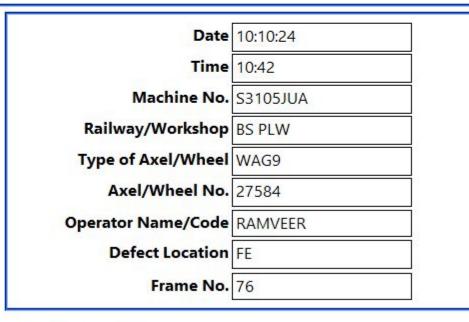


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

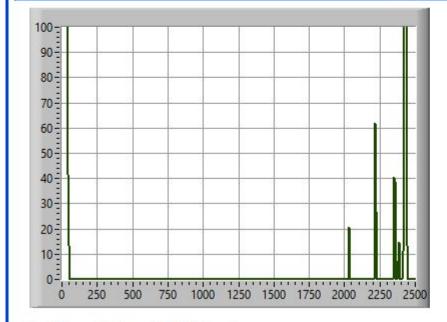

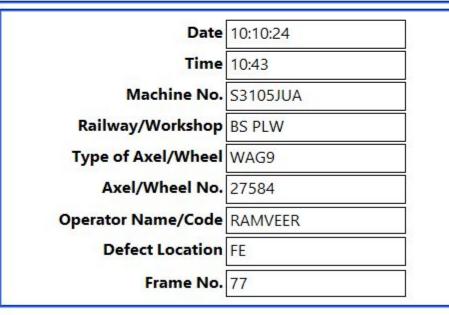


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Param	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

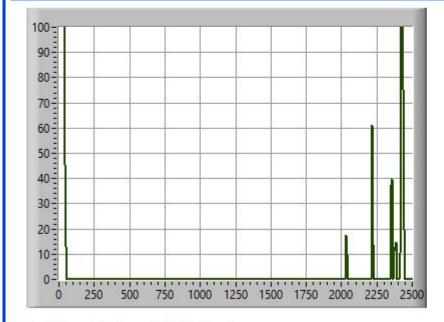

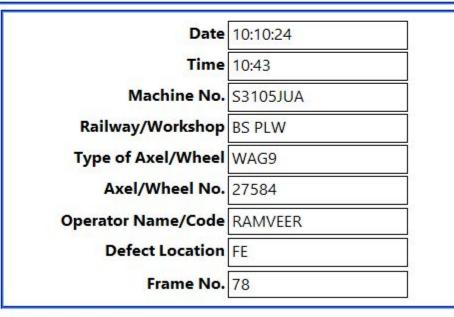


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

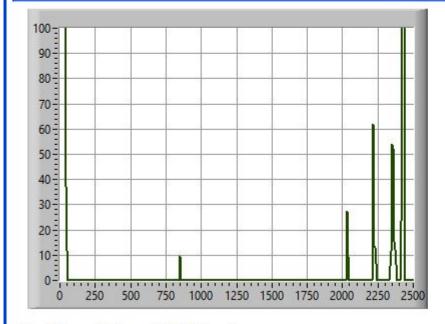

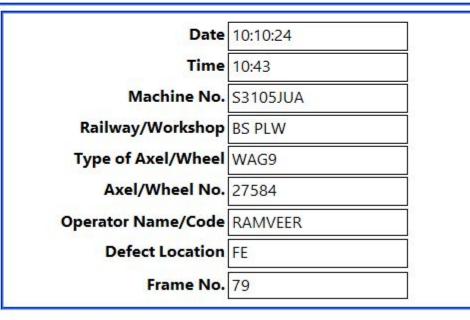


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

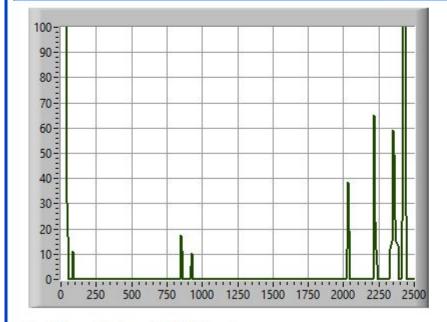

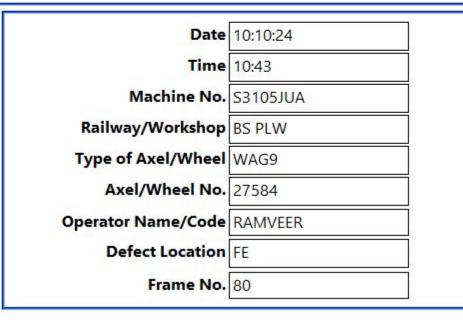


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 44.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

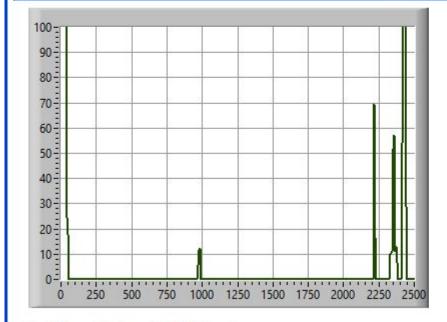

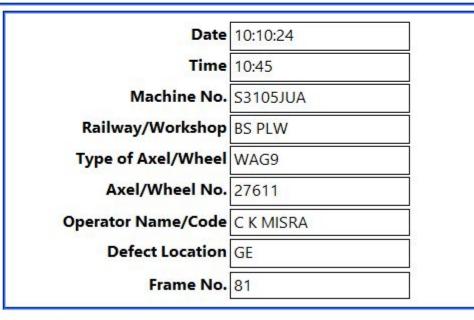


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 41.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

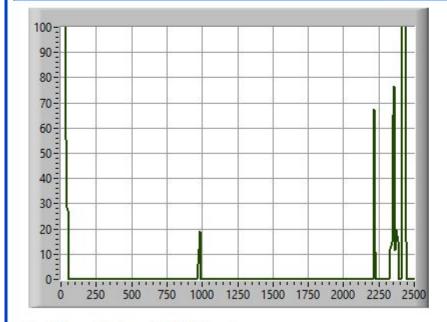

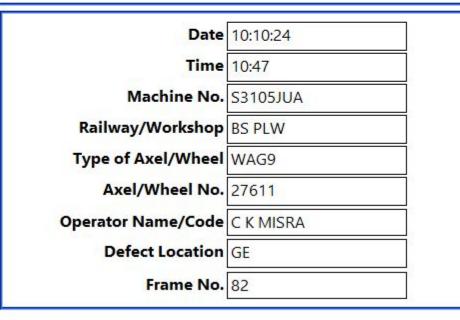


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:20 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 41.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

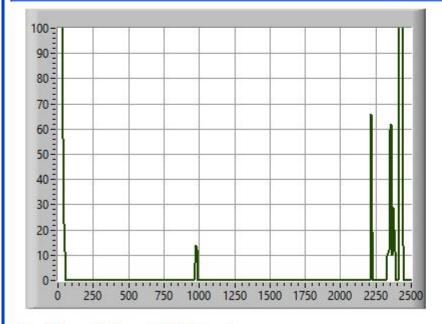

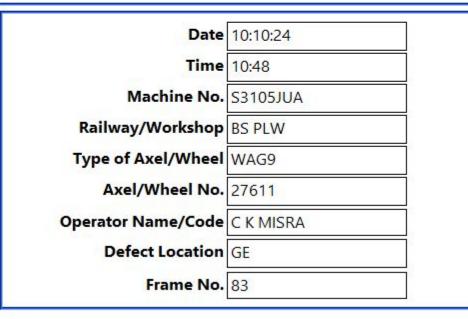


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 41.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

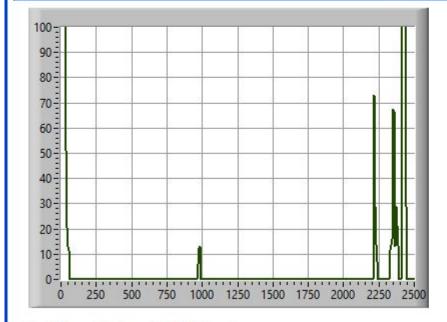

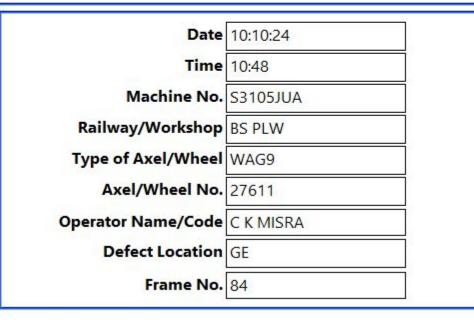


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

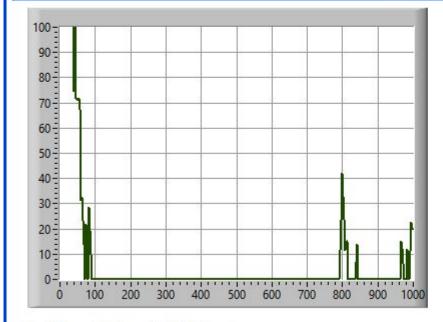

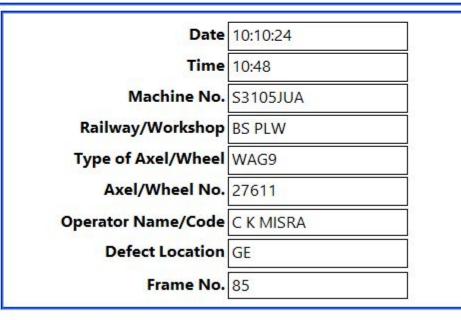


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

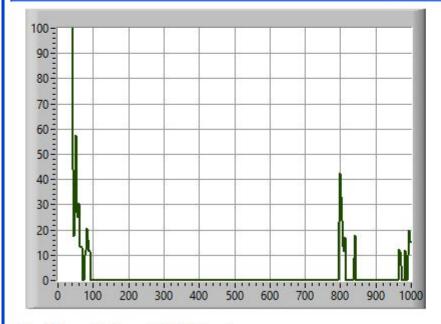

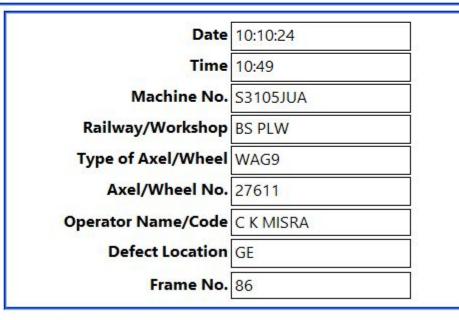


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

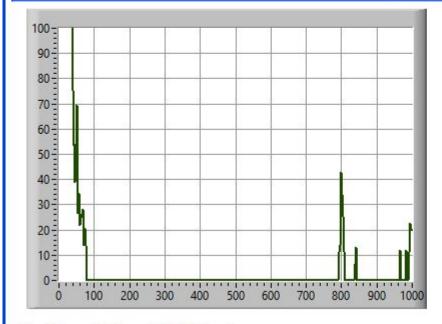

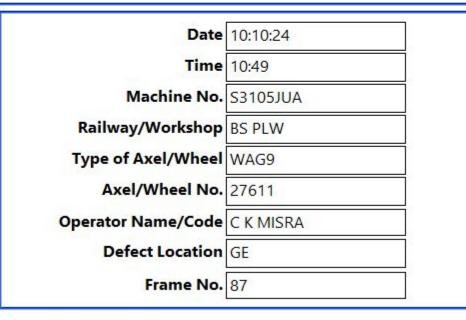


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

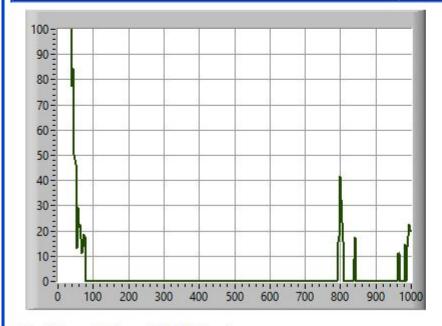

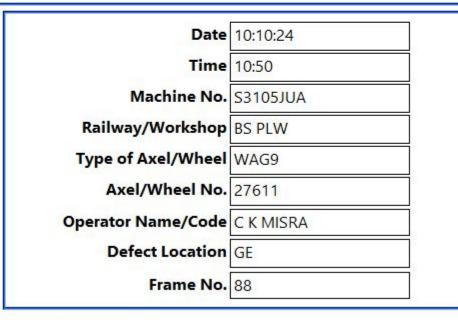


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

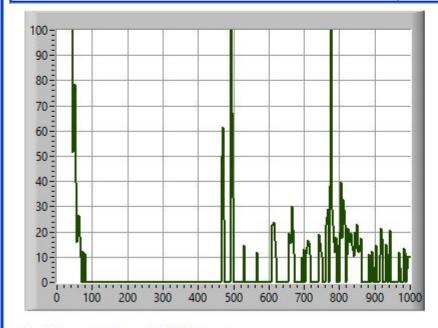

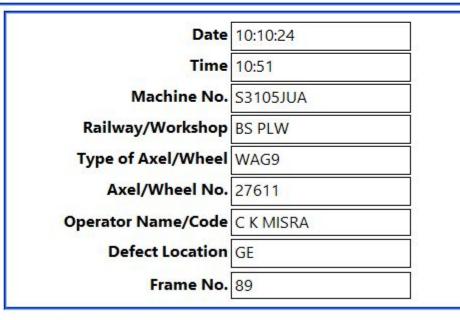


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

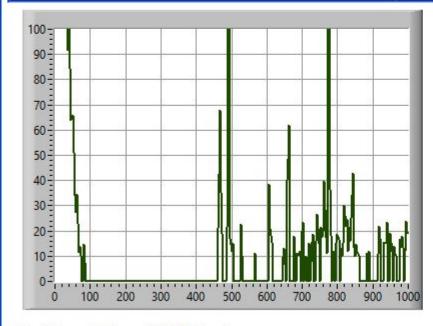

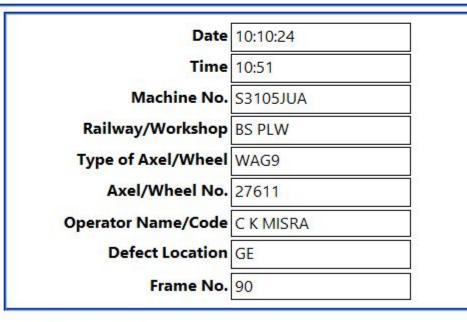


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

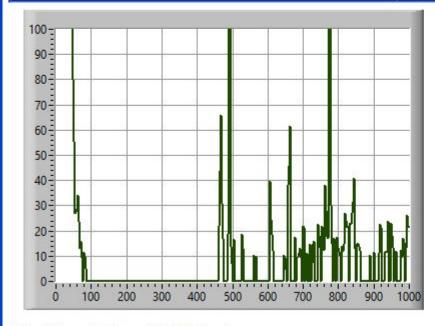

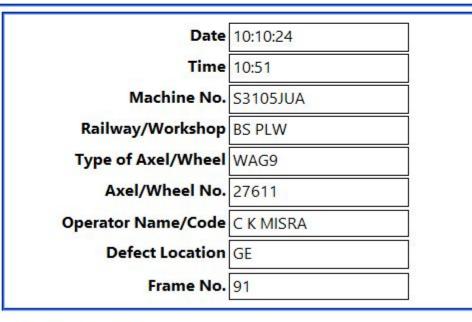


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 50.3 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

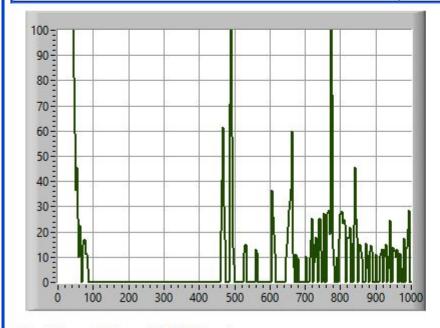

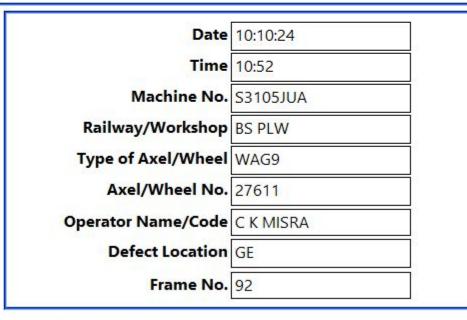


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure				
Gain	: 46.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

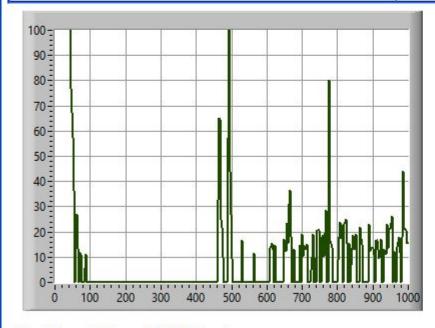

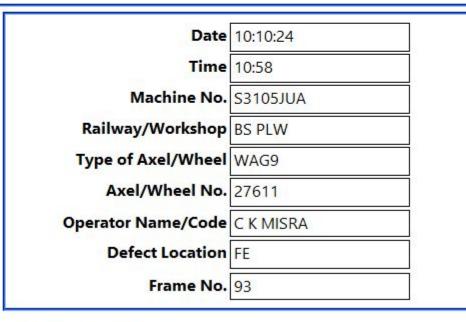


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 46.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

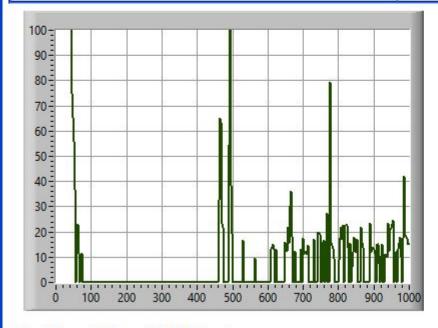

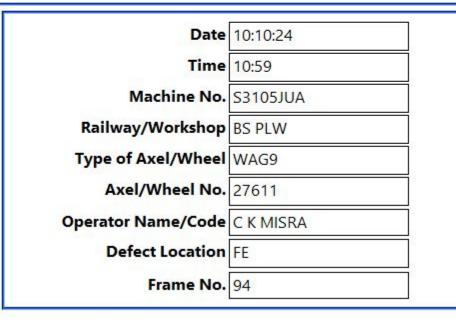


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 47.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

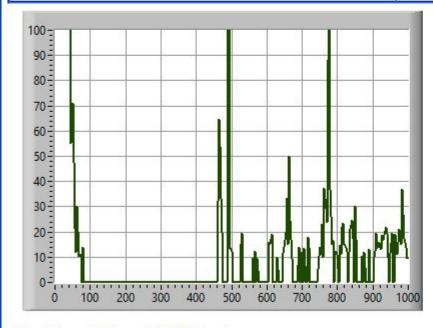

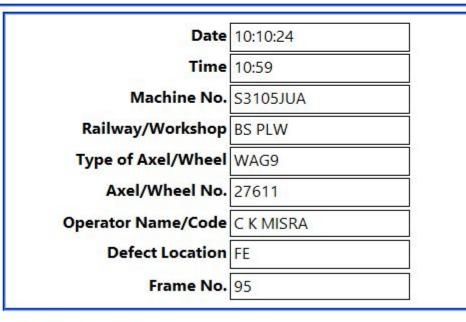


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 47.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

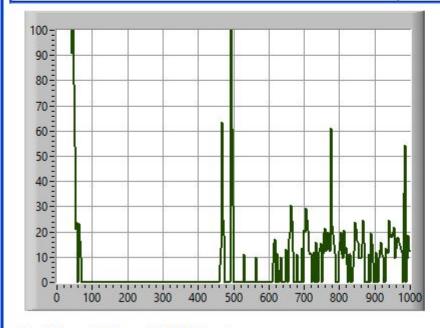

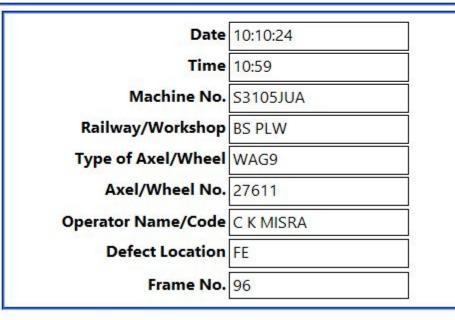


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 42.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

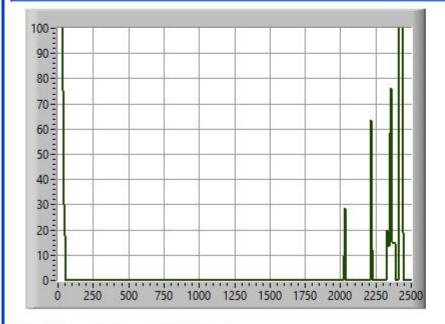

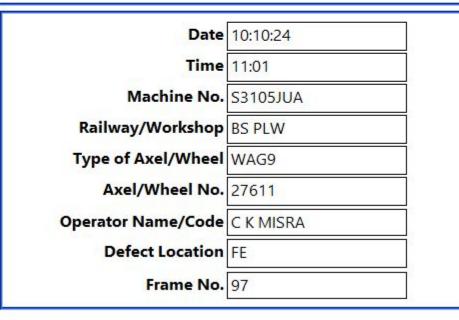


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 42.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

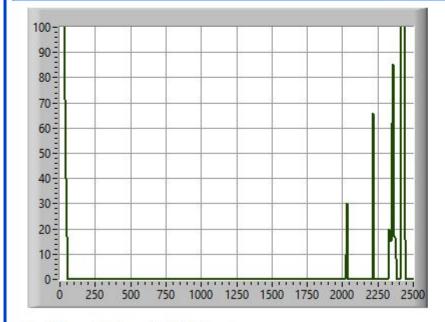

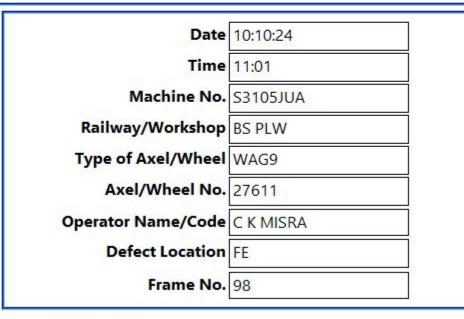


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 42.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

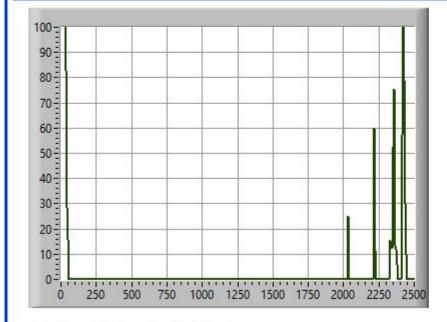

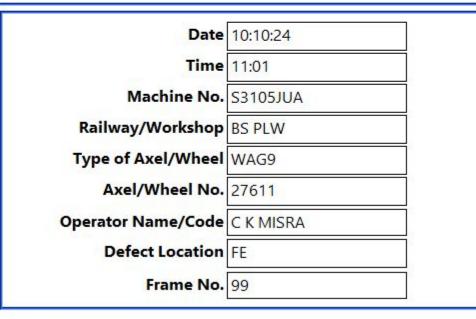


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 11-Oct-24 TIME: 9:21 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 42.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

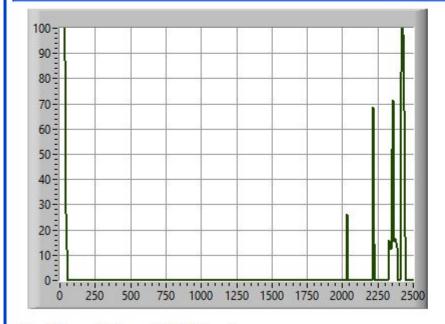

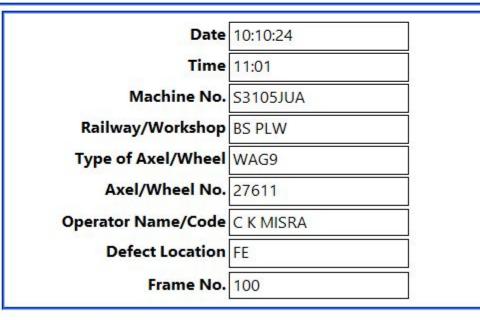


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:52 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 32.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

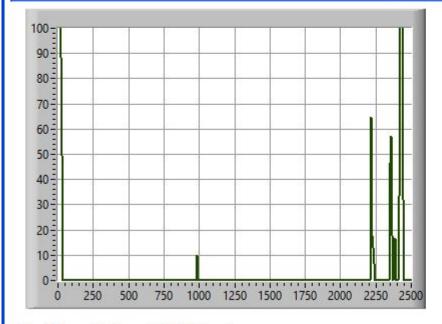

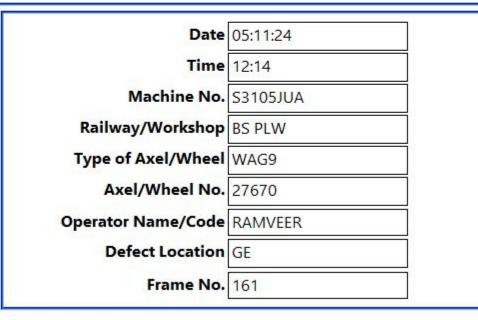


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:52 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Param	neters		Gate Measure				
Gain	: 32.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

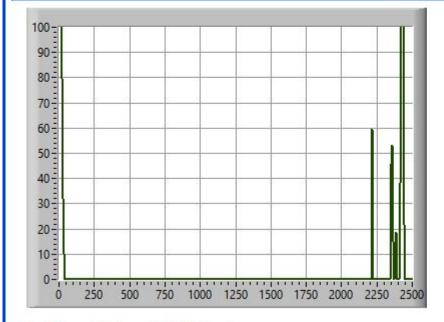

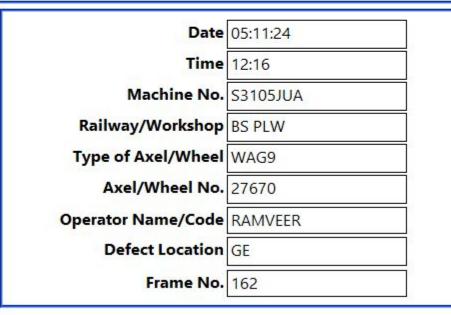


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:52 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 32.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

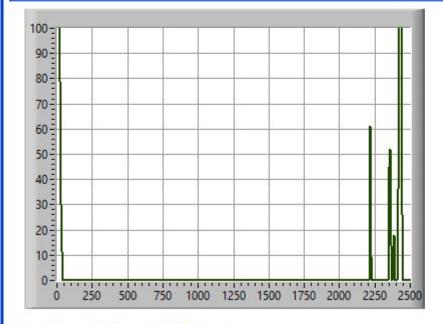

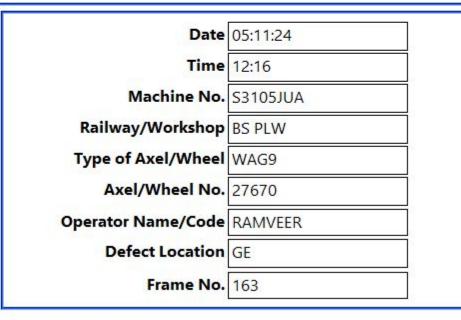


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 32.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

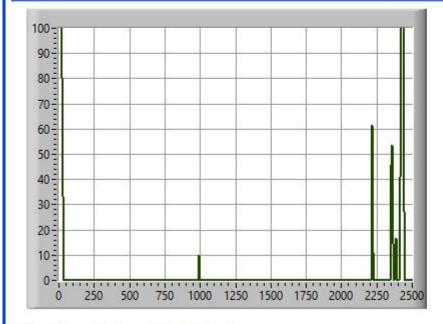

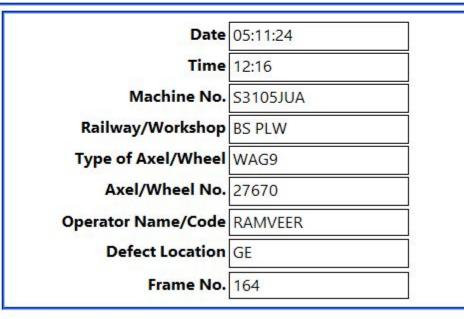


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

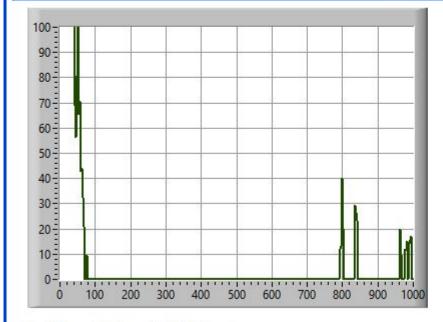

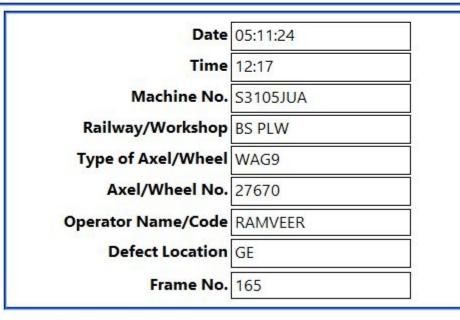


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

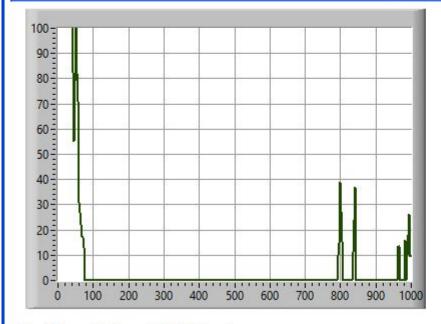

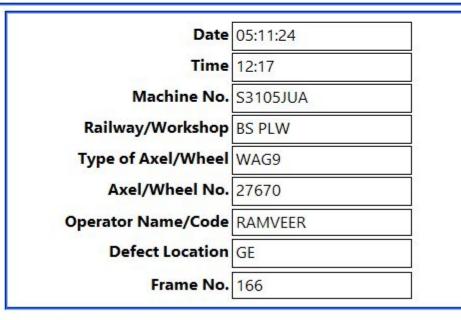


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

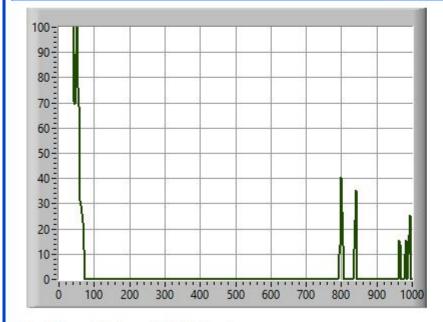

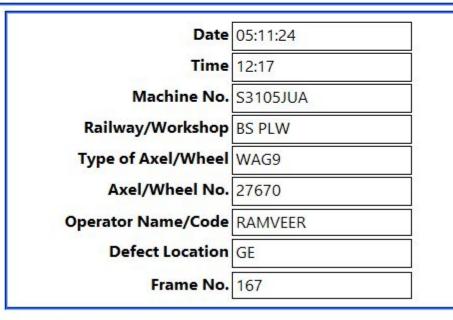


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Param	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 1000 mm	Mode	Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

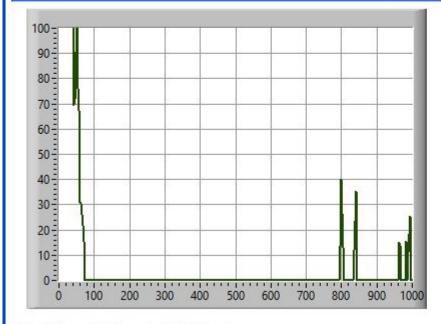

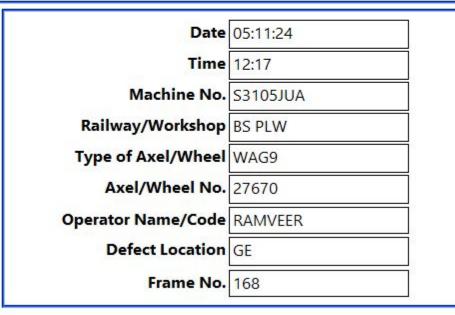


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

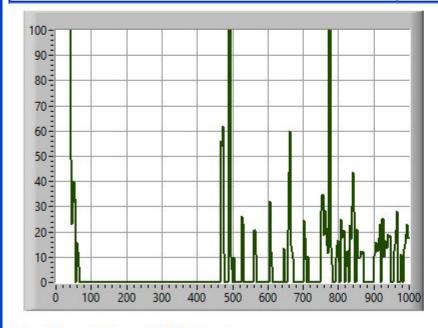

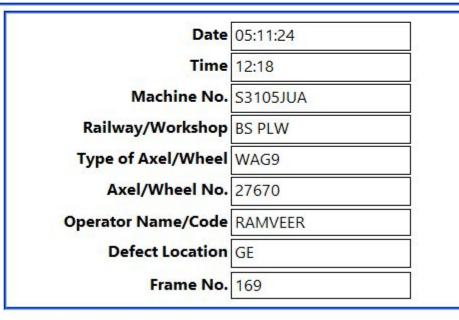


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

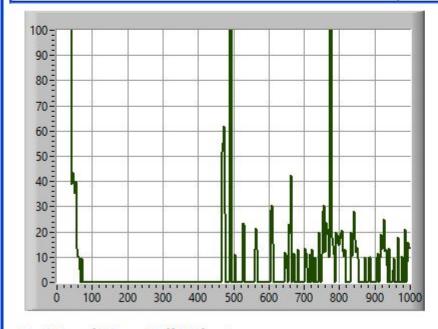

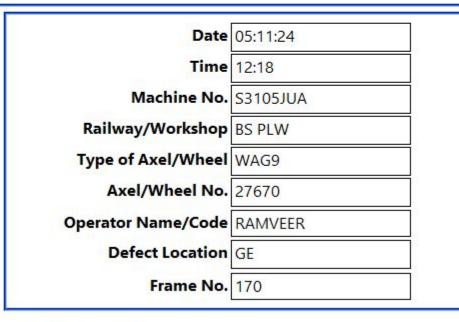


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

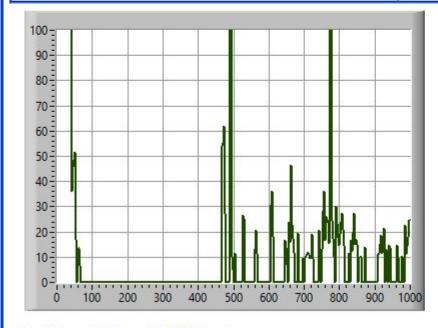

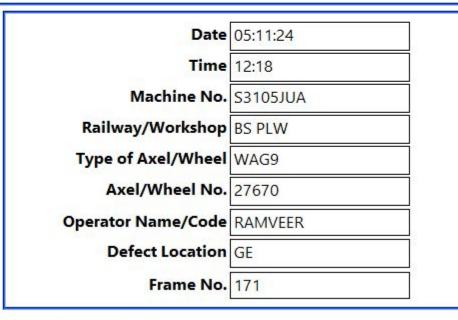


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

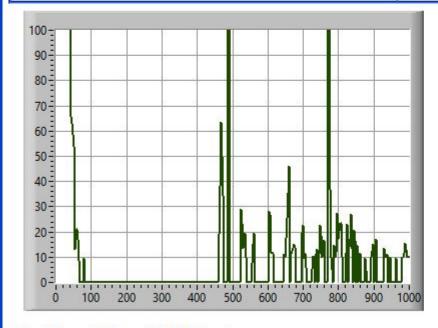

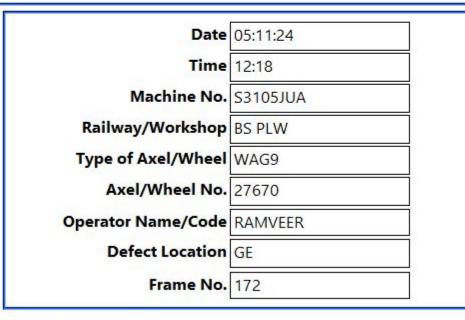


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

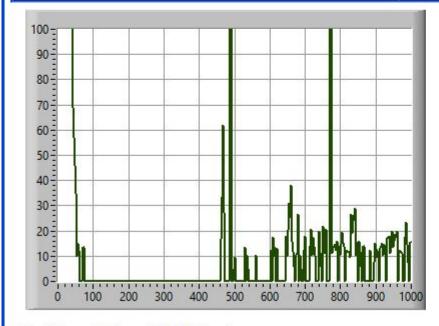

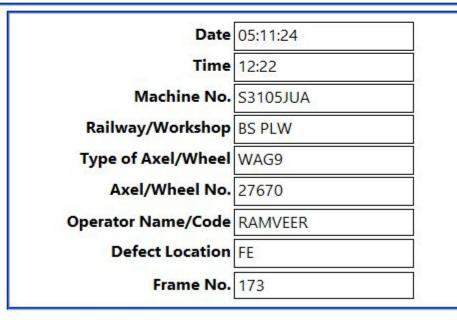


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status	: OFF
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm

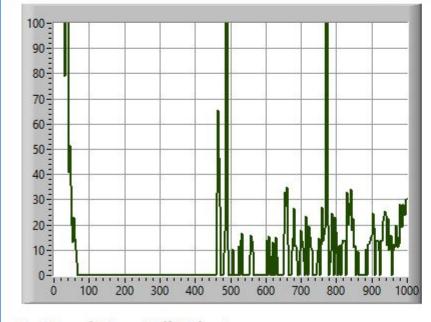

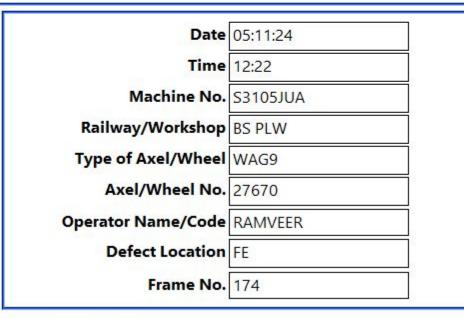


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

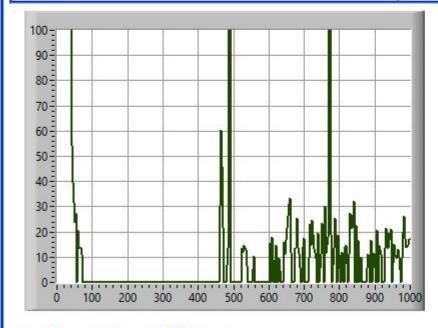

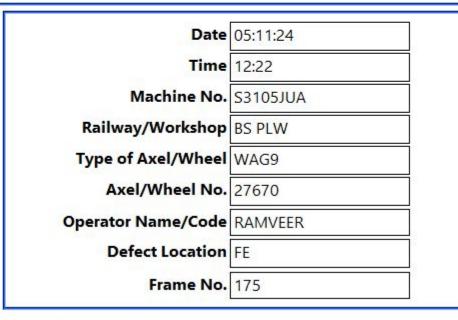


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

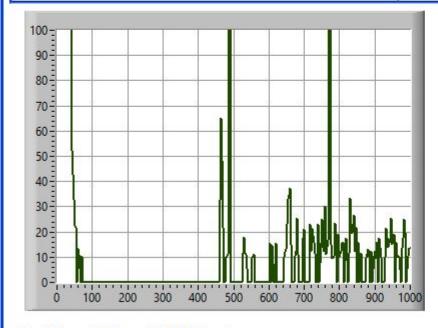

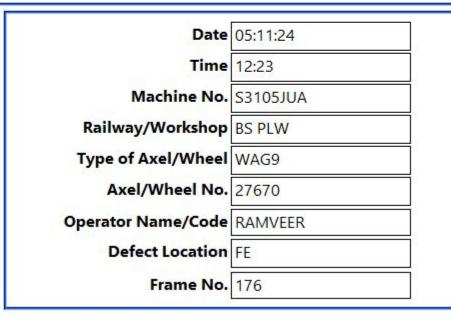


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 38.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

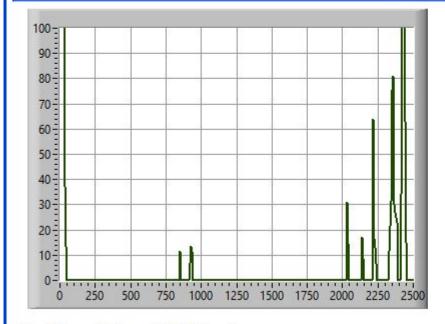

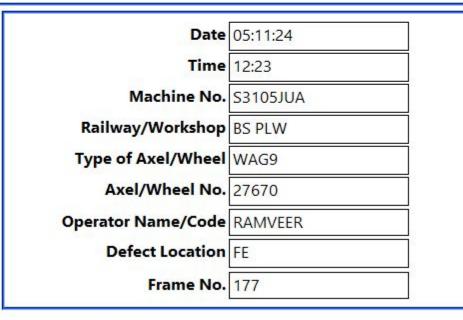


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 38.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

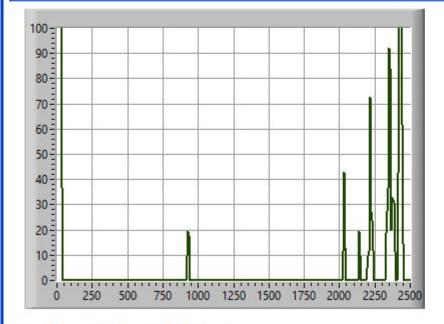

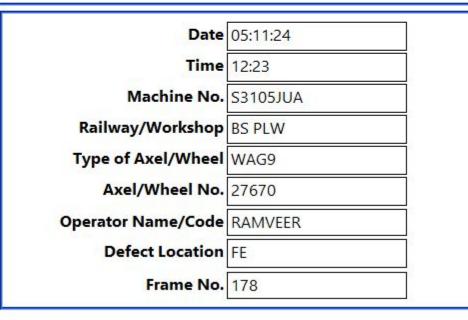


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 32.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

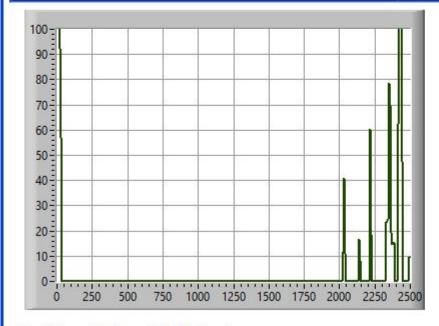

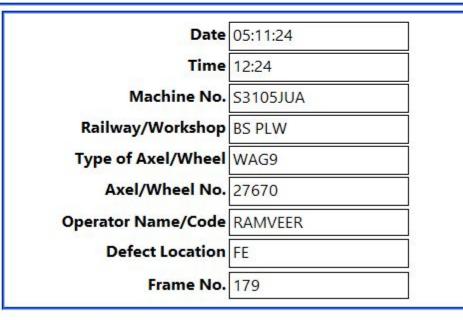


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 06-Nov-24 TIME: 8:53 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 32.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

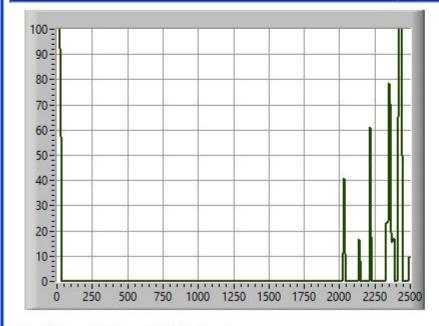

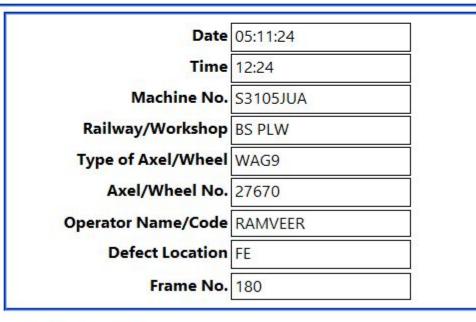


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 34.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

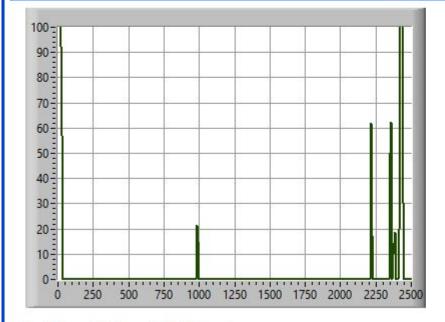

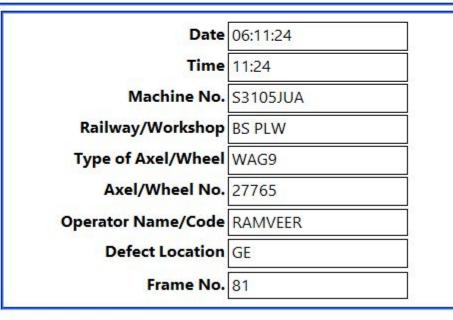


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 34.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

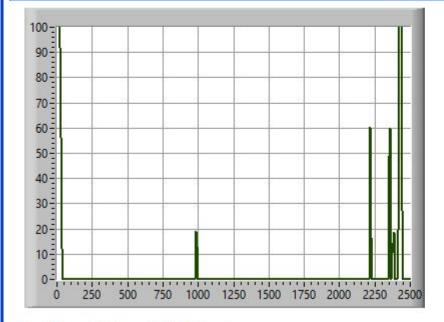

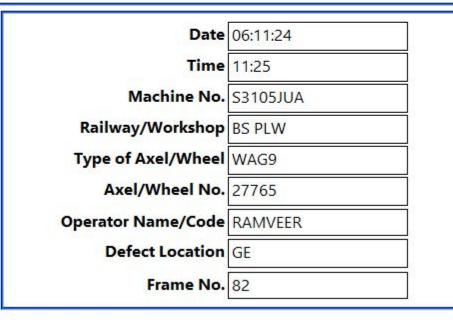


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 34.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

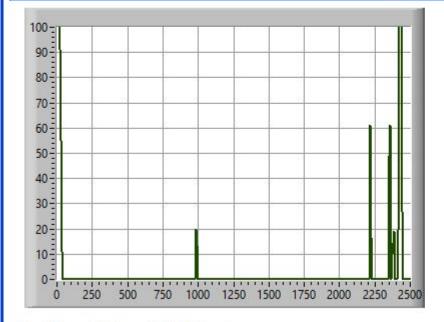

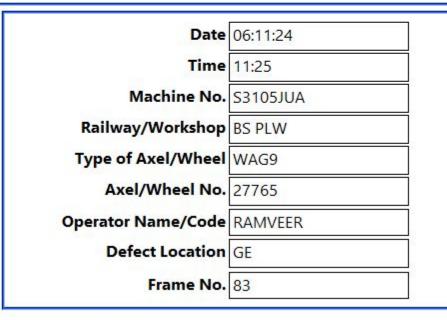


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

2	Testing Paran	neters		Gate Measure				
Gain	: 34.3 dB	Probe Zero	: 3.8	G1 Status	OFF	G2 Status	: OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

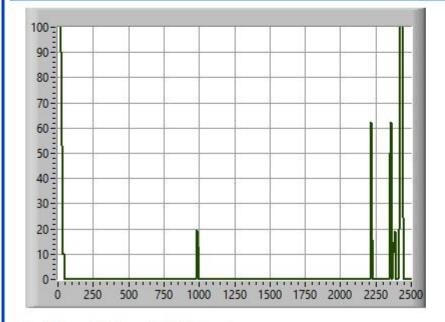

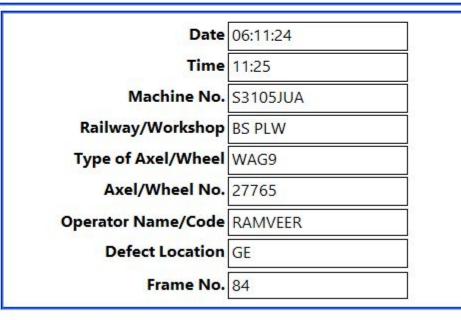


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

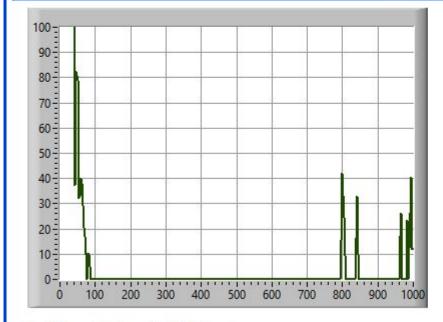

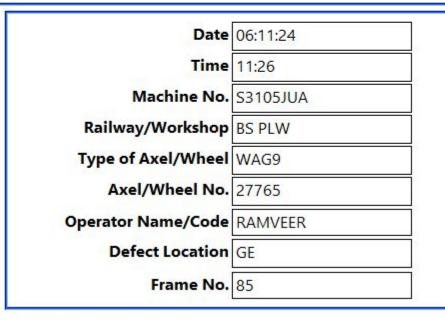


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

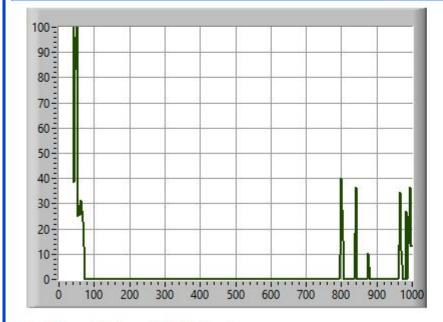

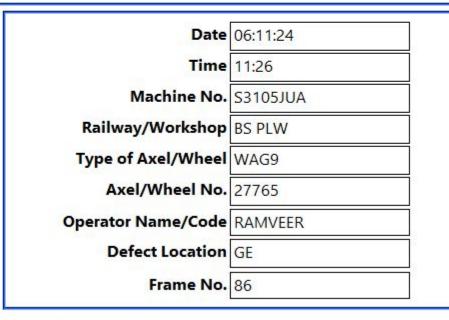


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

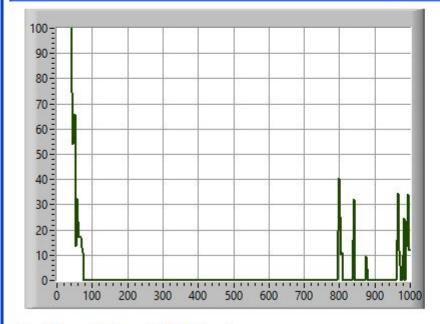

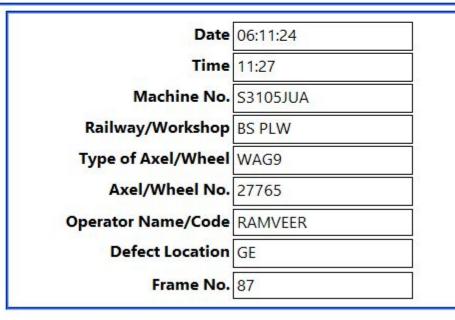


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

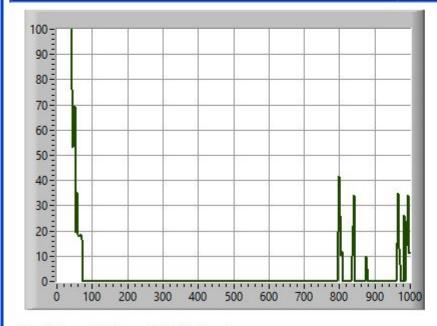

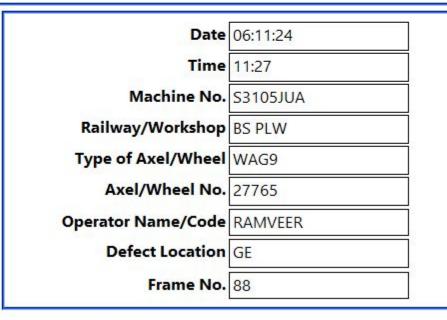


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

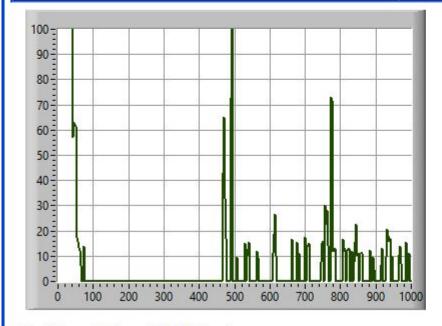

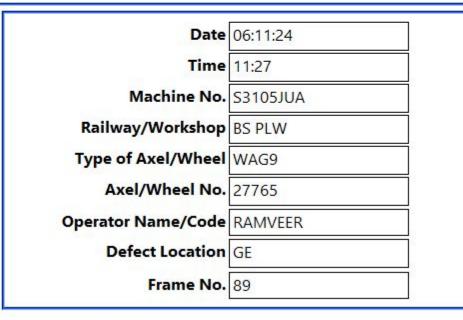


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

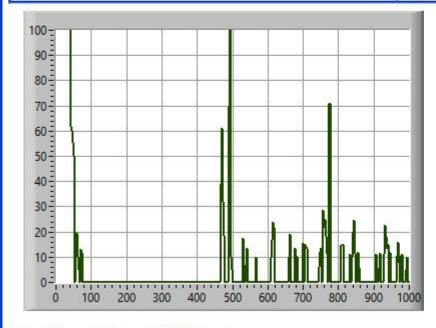

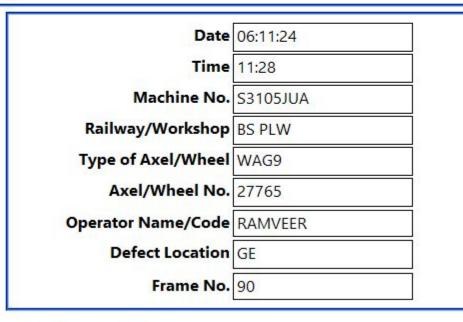


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

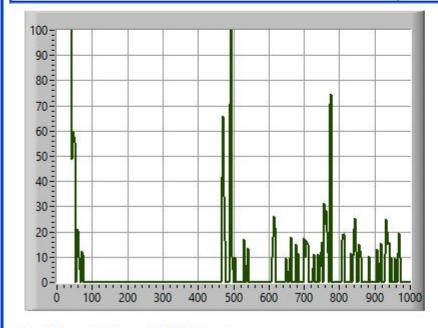

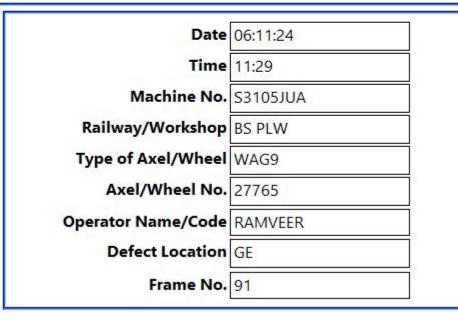


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status	: OFF
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm

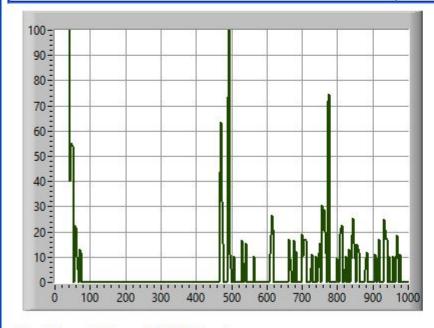

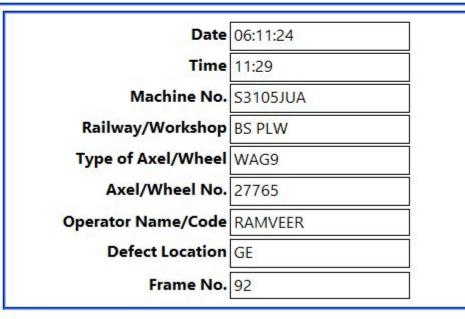


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

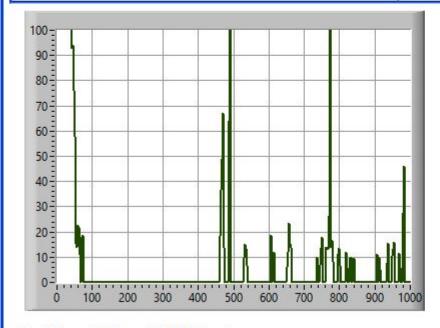

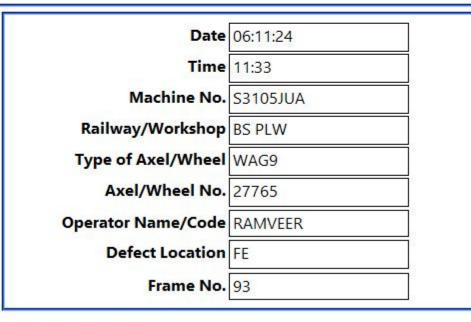


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

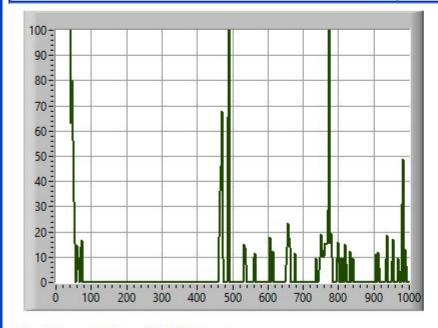

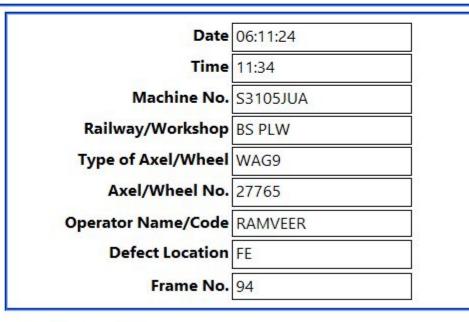


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

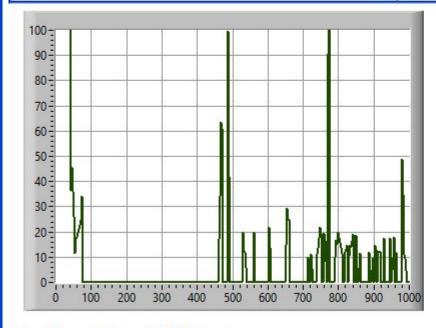

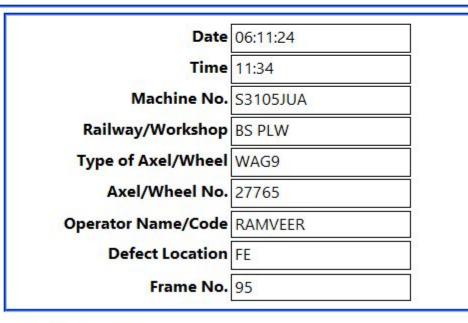


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

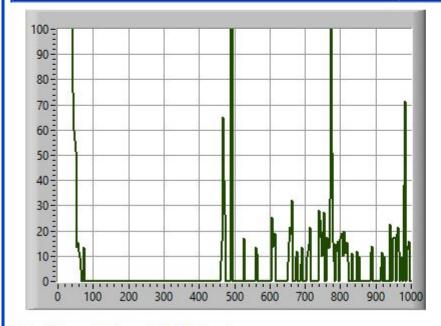

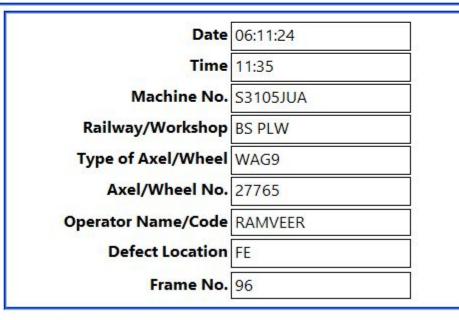


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 34.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

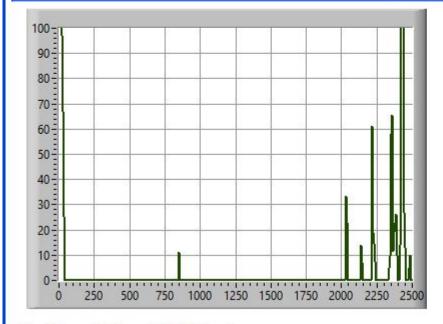

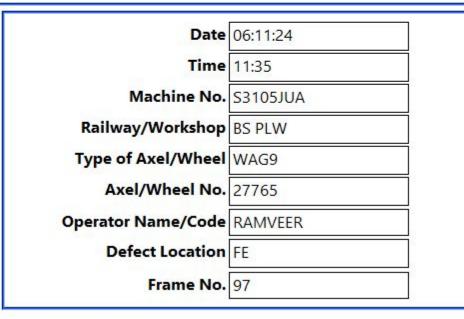


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 34.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

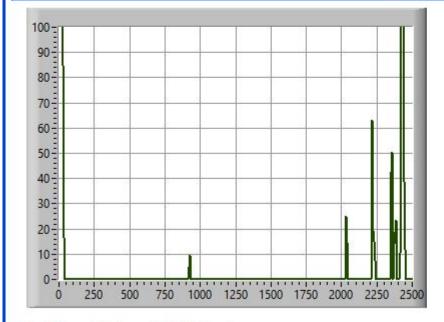

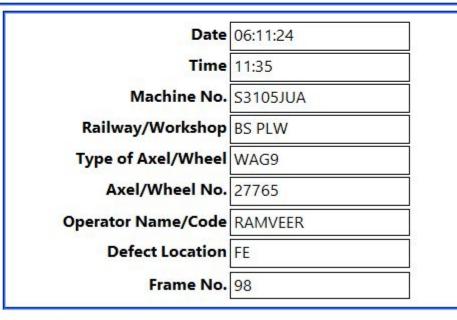


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 30.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

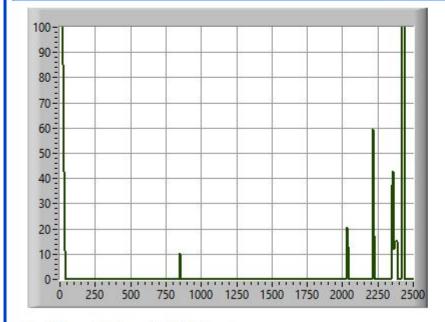

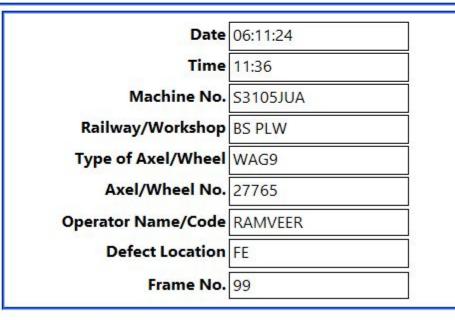


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 07-Nov-24 TIME: 9:05 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 30.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

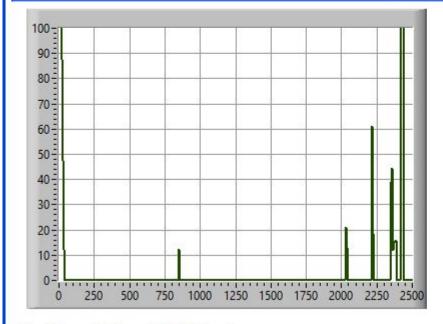

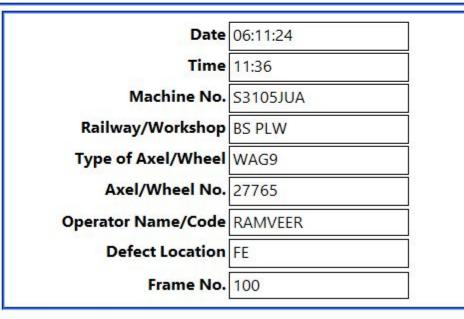


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.O.OO.AE.O4.06

	Testing Paran	neters		Gate Measure			
Gain	: 48.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

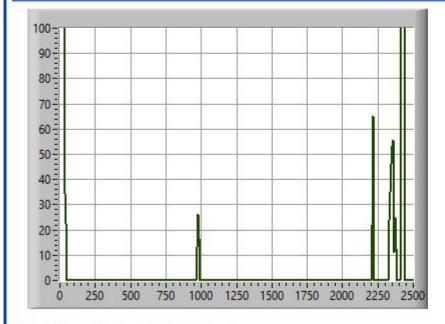

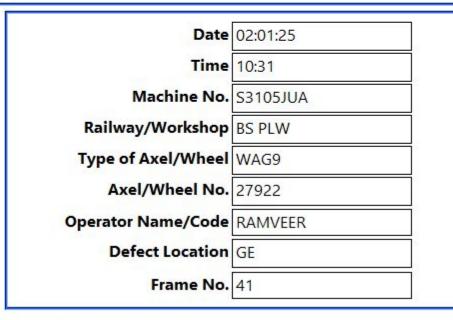


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 48.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

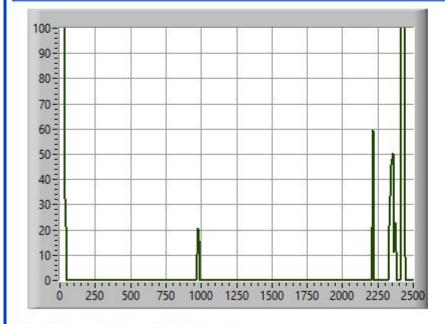

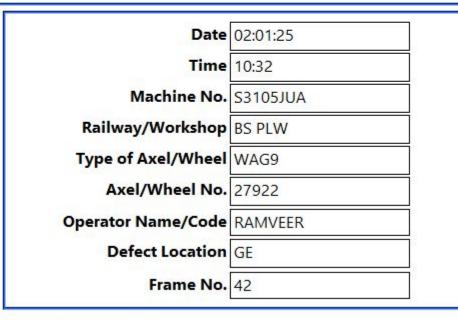


Test Result(Pass/Fail/Other) : If Other, then Remarks :




**DATE:** 03-Jan-25 **TIME:** 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 48.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

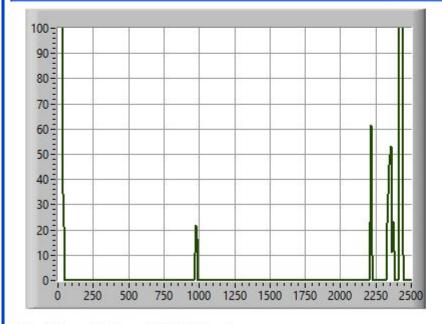

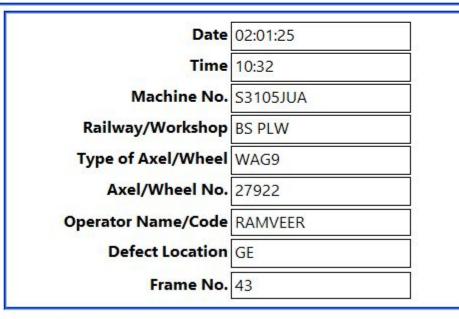


Test Result(Pass/Fail/Other) : If Other, then Remarks :




**DATE:** 03-Jan-25 **TIME:** 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 48.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

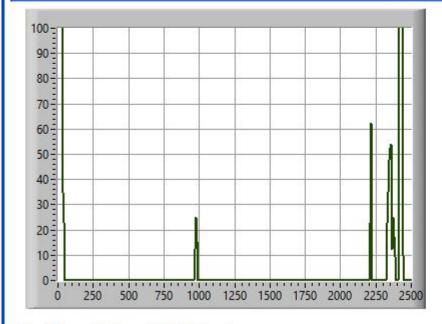

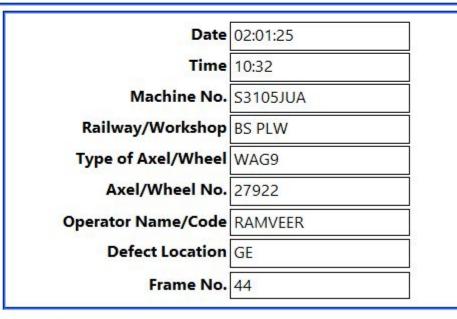


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

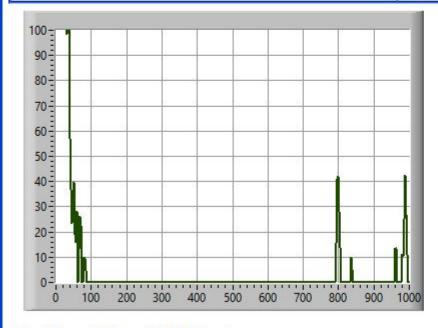

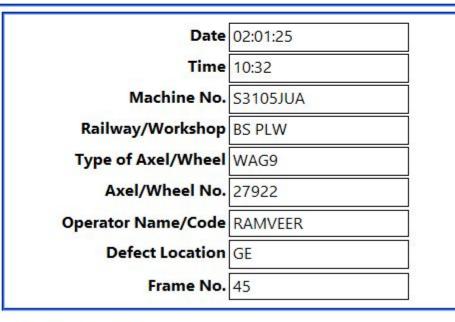


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	meters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

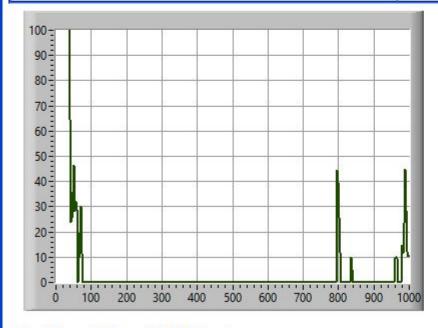

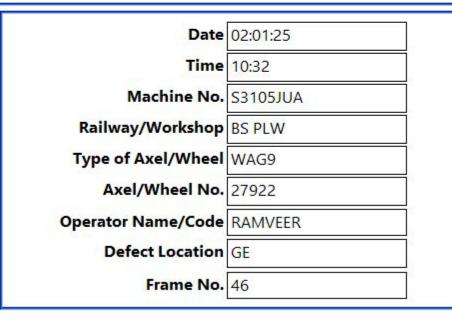


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm	]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

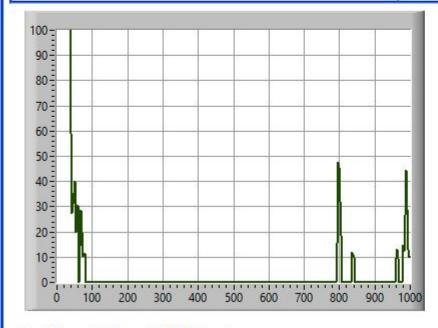

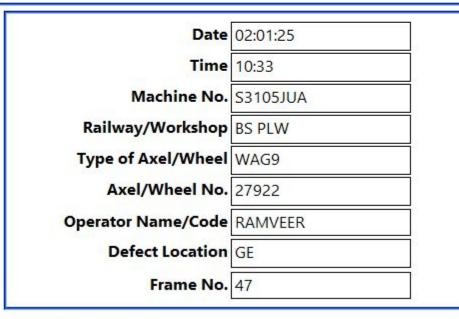


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

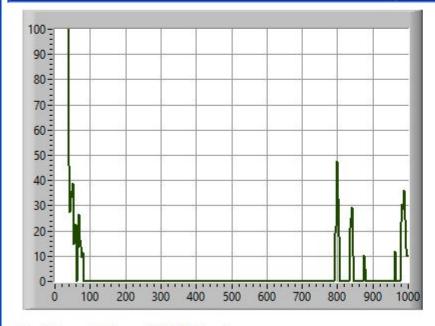

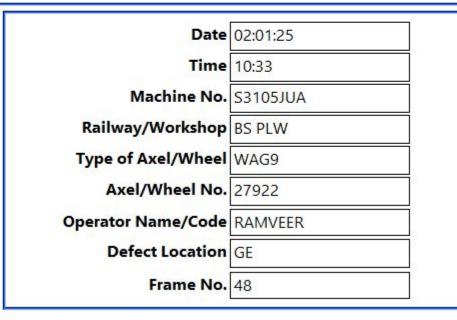


Test Result(Pass/Fail/Other) : If Other, then Remarks :




**DATE:** 03-Jan-25 **TIME:** 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

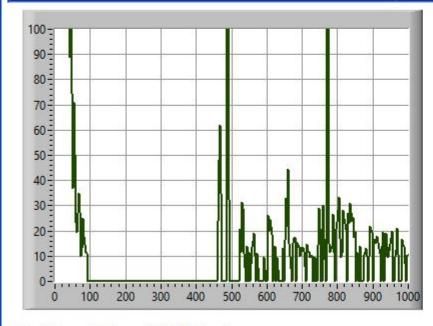

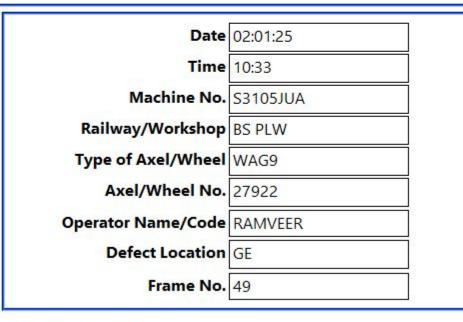


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

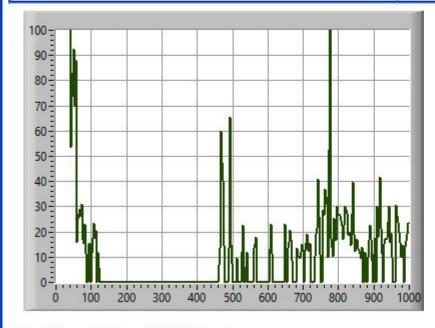

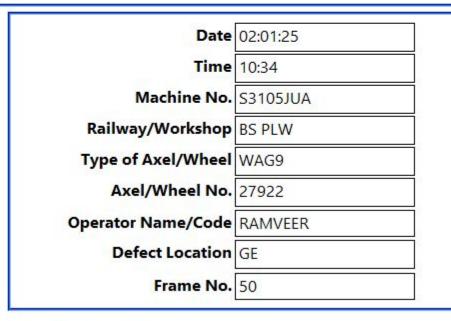


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

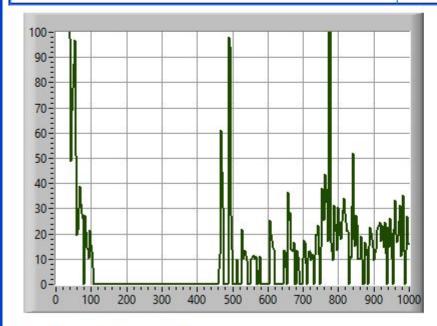

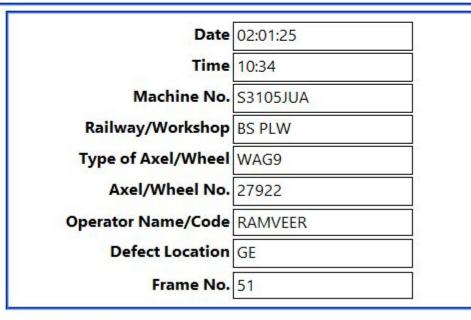


Test Result(Pass/Fail/Other) : If Other, then Remarks :




**DATE:** 03-Jan-25 **TIME:** 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

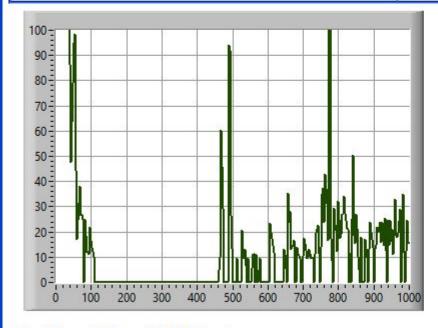

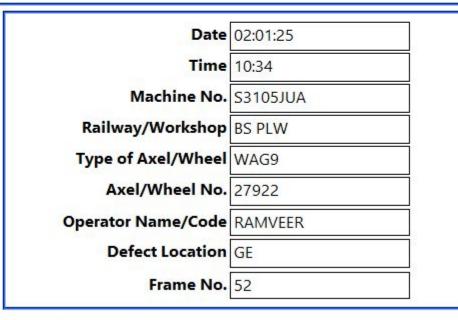


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

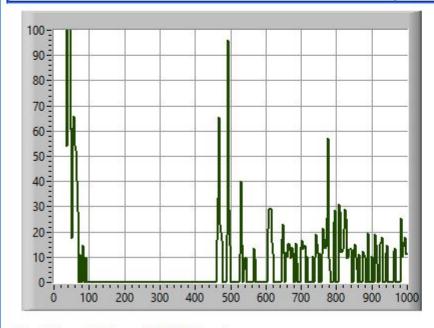

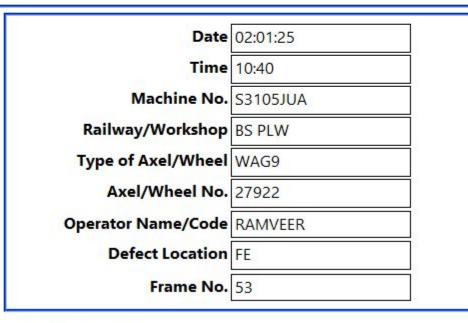


Test Result(Pass/Fail/Other) : If Other, then Remarks :




**DATE:** 03-Jan-25 **TIME:** 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

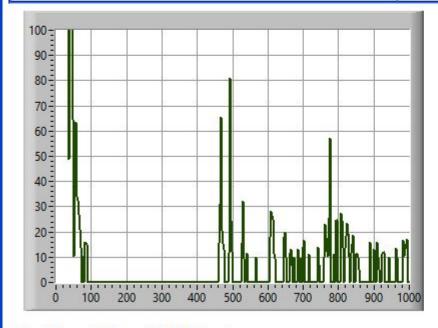

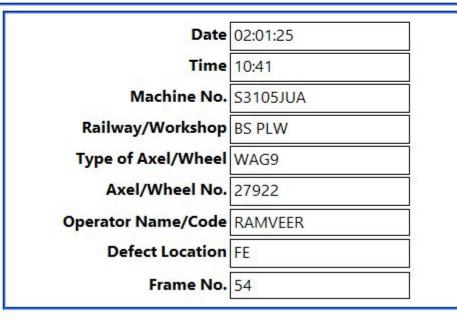


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

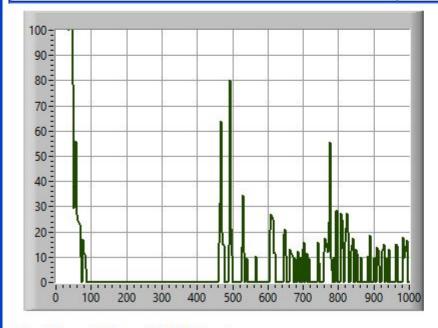

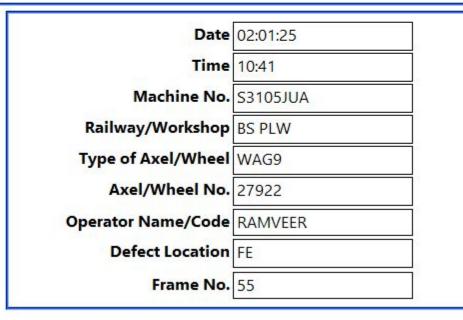


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

Testing Parameters				Gate Measure		
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm

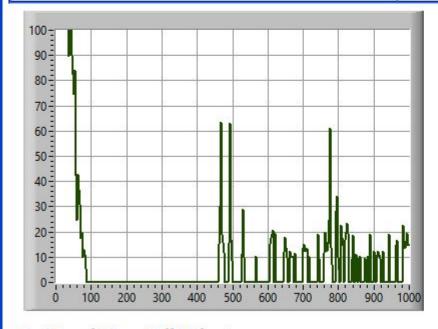

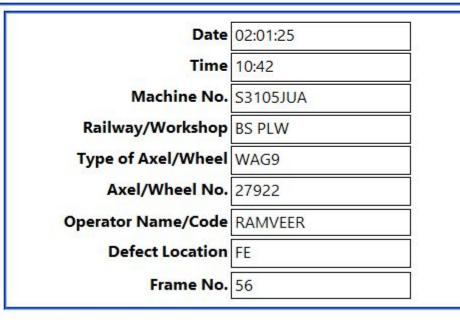


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

Testing Parameters				Gate Measure		
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm

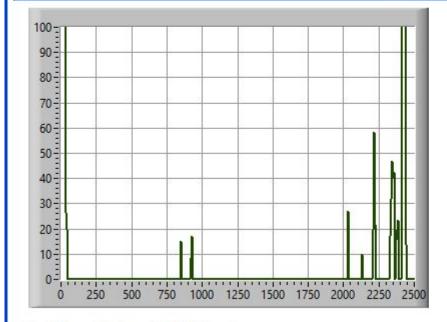

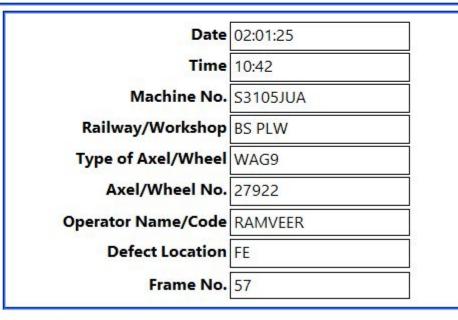


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 03-Jan-25 TIME: 9:29 AM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

Testing Parameters				Gate Measure		
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm

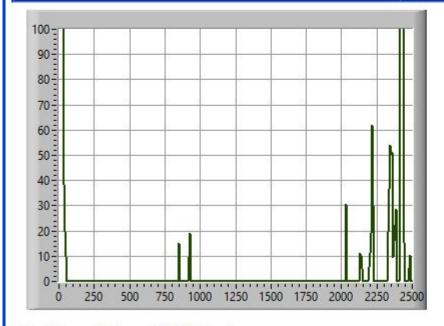

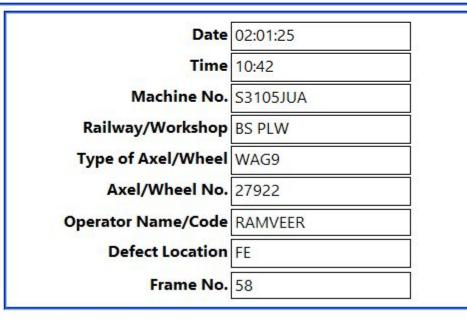


Test Result(Pass/Fail/Other) : If Other, then Remarks :




**DATE:** 03-Jan-25 **TIME:** 9:29 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

Testing Parameters				Gate Measure		
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm

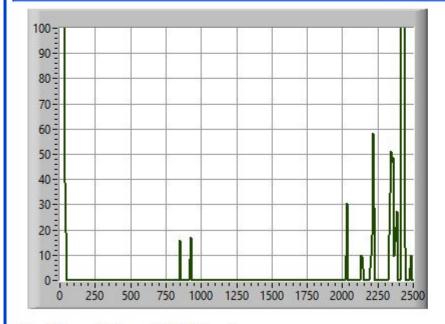

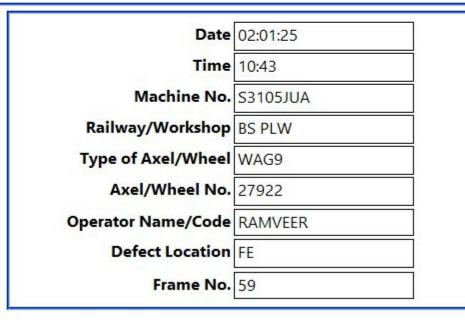


Test Result(Pass/Fail/Other) : If Other, then Remarks :




**DATE:** 03-Jan-25 **TIME:** 9:30 AM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

Testing Parameters				Gate Measure		
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm

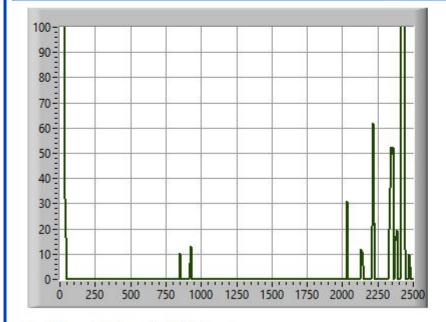

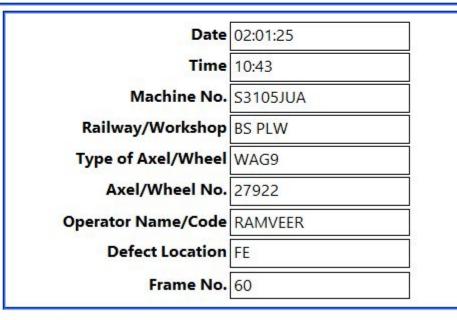

Test Result(Pass/Fail/Other) : If Other, then Remarks :



#### भारत सरकार GOVERNMENT OF INDIA

रेल मंत्राल्य

#### MINISTRY OF RAILWAYS

पटियाला रेलइंजन कारखाना

#### PATIALA LOCOMOTIVE WORKS



फोन/Phone: 0175-2396422

मोबाईल: 9779242310 पटियाला, 147003, भारत् PATIALA, 147003, INDIA



(An ISO 9001, ISO 14001, ISO 45001 & ISO 50001, 5S & Green Building certified Organization)

संख्या. PLW/M/ECS/Tech/Kavach

तिथि: As signed

(Through Mail)

Sr. Div. Electrical Engineer, Electric Loco Shed, Kazipet.

Email: elskzj@gmail.com

विषय:- Fitment of KAVACH in three Phase Electric Loco. No. 42022 WAG9-HC.

संदर्भ:- (i)Director General Stds./Electrical/RDSO letter no. EL/0.1.3/3 dated 21.08.2023.

(ii)Director General Stds./Electrical/RDSO letter no. EL/0.1.3/3 dated 26.09.2023

In ref. to the above letter's Loco No. 42022 has been dispatched with fittings for implementation of KAVACH system in locomotive at home shed in Zonal Railway. This Loco was dispatched to ELS/KZJ/SCR on 07.03.2025. The details of fittings are attached as Annexure-A (pneumatic fittings), Annexure-B (Kavach equipment mounting Brackets) & Annexure-C (Wago with harnessed lay out).

This is for your information & necessary action please.

Digitally signed by NISHANT BANSIWAL Date: 2025.04.26 16:09:01 +05'30'

(निशांत बंसीवाल)

उप मुख्य विद्युत अभियंता/लोको

प्रतिलिपि:-

CEE/Loco & CEE/D&Q, CMM, CELE/SCR:- for kind information please Dy CME/Design, Dy. CMM/Depot: for information & necessary action please WM/LAS, AWM/LFS&ABS, AWM/ECS: for necessary action please

#### Loco No. 42022

SN	PL No.	Description of item	Qty.
		ISOLATING COCK 3/8" (FEMALE) LEGRIS TYPE WITH VENT	04 nos.
1	29163341	ISOLATING COCK 3/8" (FEMALE) LEGRIS TYPE WITHOUT VENT	02 nos.
		TEE UNION 3/8"X3/8"X3/8" BRASS FITTINGS	02 nos.
		MALE CONNECTORS 3/8" TUBE OD X 3/8" BSPT, BRASS FITTINGS	09 nos.
		MALE CONNECTORS 1/2" TUBE OD X 1/2" BSPT, BRASS FITTINGS	06 nos.
		FEMALE CONNECTORS (NYLON TUBE) DIA 6 TUBE X 3/8" BSPP BRASS FITTINGS	01 no.
	29611994	MALE CONNECTOR (NYLON TUBE) DIA 6 TUBE X 3/8" BSPP BRASS FITTINGS	03 nos
2		FEMALE TEE 3/8" BSPP – BRASS	06 nos
2		HEX PLUG -3/8" BSPT – BRASS	02 nos
		FEMALE TEE 1/2" BSPP – BRASS	04 nos
		HEX NIPPLE 3/8X3/8" BSPT – BRASS	04 nos
		RED HEX NIPPLE 3/8X1/2" BSPT - BRASS	02 nos
		HEX PLUG – 1/2" BSPT – BRASS	04 nos
	·	MALE ELBOW CONNECTORS 3/8" TUBE OD X 3/8) BSPT. BRASS FITTINGS	02 nos
3	29170114	Copper Tube OD 9.52mm (3/8" ) X 1.245 Mm W.T X 6 Mtr	1.2Mtr

AWWABS & FS

SSE/G/ABS

SN	PLNo	Description of Item	Quantity ::		
1	29611945	Mounting bracket arrangement provided for RF Antenna on the roof top of both driver cabs.	04 nos.		
2.		Mounting bracket arrangement provided for GPS/GSM Antenna on the roof top of both driver cabs.	02 nos.		
3.		Protection Guards for RFID reader provided behind the cattle guards of both side.	04 nos.		
4.		Inspection door with latch provided on the both driver desk covers (LP side) in each cab to access isolation cock.	02 nos.		
5.	Cable Entry Plate fitted for routing of cable with RF Antenna & GPS/GSM Antenna bracket.				
6.		WAGO bracket fitted in Machine room at back side of SB-1.	01 no.		
7.	_	One circular hole of 80 mm dia. provided in each cabs on LP side behind the driver desk toward the wall for routing of OCIP (DMI) cables.	02 nos.		
8.	-	80 mm holes provided on TM1 and TM6 Junction box inspection cover hole for drawing of RFID reader cables.	02 nos.		
9.	, -	DIN Rail fitted inside the driver desk (LP Side)	02 nos.		

AWMABS SEES

SSELE/LFS

#### Annexure-C

SN	PL No.	Bescription of item	Quantity
1.	42310301	Flexible conduit size 25mm <sup>2</sup> provided for RF-1, 2 & GPS Antenna cable layout from CAB-1&2 to Machine room.	06 mtr.
2.	29611982	Wago terminals in CAB-1&2 (25 nos. in each CAB).	50 nos.
3.	29611982	Wago terminal in Machine room at back side of SB-1.	75 nos.
4.		Harness provided from KAVACH SB to SB-1	07 wires
5.		Harness provided from KAVACH SB to SB-2	05 wires
6.	PH	Harness provided from KAVACH SB to Pneumatic Panel	12 wires
7.	<b>—</b>	Harness provided from KAVACH SB to CAB-1	16 wires
8.	-	Harness provided from KAVACH SB to CAB-2	16 wires

AWMECS

SSEIGIECS

#### TOP 12 COSTLIEST ITEMS OF WAG9HC LOCO WITH WARRANTY CONDITIONS AS PER TENDERS

S No	PL No	DESCRIPTION	Warranty Period
1	29741075	IGBT BASED 3-PHASE DRIVE PROPULSION EQUIPMENT	60 months after commissioning or 72 months from date of supply whichever earlier as per special conditions given by CLW
2	29731057	MAIN TRANSFORMER 7775 KVA TYPE LOT 7500 FOR WAP7 3- PHASE ELECTRIC LOCOMOTIVE TO CLW SPECN NO.CLW/ES/3/0660/C	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
3	29171064	COMPLETE SHELL ASSLY (PIPED & PAINTED) FOR WAP-7 LOCO TO CLW SPEC. NO. CLW/MS/3/152 ALT- 8	AS PER IRS CONDITIONS-30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER.
4	29600418	LOCOMOTIVES TO CLW SPECN. NO. CLW/ES/03/646  ALT-NIL WITH DMW REQUIREMENT OF HARNESSED	As per clause no.9 of CLW Specn. CLW/ES/3/0458 & Clause No.10 of CLW SpecnCLW/ES/3/0459. [18 months after commissioning or 20 months from date of supply for single core & 18 months after commissioning or 24 months from date of supply for multi core]

7	29942007	3-PHASE ASYNCHRONOUS TRACTION MOTOR (RESISTANCE RING MECHANICALLY INTERLOCKED TO END PLATE DESIGN ROTOR, SCHEME-II), TYPE 6FRA-6068 FOR WAP-7 ELECTRIC LOCO WITHOUT ACTIVE SPEED SENSOR TO SPECIFICATION NO. 4TMS.096.081 ALT-2 AND STR NO. CLW/2008/3PHTM/STR/0001.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
6	29480140	COMPLETE FILTER CUBICLE ALONG WITH ALL EQUIPMENTS AND CABLING TO DRG./SPEC NO. [1] CLW/ES/3/0193 ALT-F OR LATEST AND CLW DRG. NO. 1209-15-143-004 ALT-10 AND PART DRG./SPEC NO AS PER ANNEXURE-A ATTACHED.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
5	29180016	BRAKE CONTROL SYSTEM INCLUDING DRIVER'S VIGILANCE CONTROL DEVICE TO SET LIST NO.EL29180016.	As per specification no. CLW/MS/3/001 Alt. 16 i.e. the manufacturer is required to guarantee that the brakevalves/equipment work satisfactorily for a period of five (5) years after commissioning. Any equipment/part which failsduring the guarantee period shall be replaced free of cost by the manufacturer. The replaced components shallfurther be under warranty for five (5) years from the date of their fitment and should the replaced components proveunsatisfactory in service, they shall be replaced by modified and improved components by the supplier free of cost.

8	29105146	Bogie Frame Complete for WAP-7 for 3 Phase Co Co Locomotive to CLW specification No. CLW/MS/3/Bogie/003 alt-1 and CLW Drg.No.1209.01.112-202 Alt-Nil	As per clause 16 of Spec.No.CLW/MS/3/Bogie/003 Alt-1. [60 months after commissioning or 72 months from date of supply]
9	29171192	COMPLETE AUXILIARY CUBICLE HB2 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0192 ALT-E OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
10	29171210	COMPLETE CONTROL CUBICLE SB2 ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0195/A ALT-H OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
11	29171209	COMPLETE CONTROL CUBICLE SB1 (PUSH PULL SCHEME COMPLIANT) ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0194 ALT-G OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
12	29171180	COMPLETE AUXILIARY CUBICLE HB1 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0191 ALT-D OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.