भारतीय रेल Indian Railways

पटियाला रेलइंजन कारख़ाना, पटियाला

PATIALA LOCOMOTIVE WORKS, PATIALA



LOCO TESTING & DISPATCH REPORT OF IGBT BASED wAg9hc ELECTRIC LOCOMOTIVE

LOCO NO.: 42048

TYPE: WAG9HC

Rail way shed: CR/PADX

ProPulsion system: ALSTOM

Date of Dispatch: 26.06.2025

लोको निर्माण रिकार्ड



पटियाला रेलइंजन कारख़ाना, पटियाला PATIALA LOCOMOTIVE WORKS, PATIALA

LOCO NO.: 42048

RAILWAY/SHED: CR/PADX

DOD: June-2025

INDEX

SN	PARA	ACTIVITIES	PAGE NO.		
Testing & Commissioning (ECS)					
1.	1.0	Continuity Test of the cables			
	1.1	Continuity Test of Traction Circuit Cables			
	1.2	Continuity Test of Auxiliary Circuit Cables	1-4		
	1.3	Continuity Test of Battery Circuit Cables			
	1.4	Continuity Test of Screened Control Circuit Cables			
2.	2.0	Low Tension test			
	2.1	Measurement of resistor in OHMS (Ω)	5-6		
	2.2	Check Points	3-0		
	2.3	Low Tension Test Battery Circuits (without control electronics)			
3	3.0	Downloading of Software			
	3.1	Check Points			
	3.2	Download Software	7-10		
	3.3	Analogue Signal Checking	-		
	3.4	Functional test in simulation mode			
4	4.0	Sensor test & convertor test			
	4.1	Test wiring Transformer Circuits – Polarity Test			
	4.2	Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)			
	4.3	Primary Voltage Transformer			
	4.4	Minimum voltage relay (Pos. 86)	44.40		
	4.5	Maximum current relay (Pos. 78)	11-16		
	4.6	Test current sensors			
	4.7	Test DC Link Voltage Sensors (Pos 15.6/*)			
	4.8	Verification of Converter Protection Circuits (Hardware limits)			
	4.9	Sequence of BUR contactors			
5.	5.0	Commissioning with High Voltage			
	5.1	Check List			
	5.2	Safety test main circuit breaker			
	5.3	Auxiliary Converter Commissioning			
	5.3.1	Running test of 3 ph. auxiliary equipments			
	5.3.2	Performance of Auxiliary Converters			
	5.3.3	Performance of BURs when one BUR goes out	16-25		
	<i>5.4</i>	Auxiliary circuit 415/110			
	5.5	Hotel Load Circuit			
	5.6	Traction Converter Commissioning			
	5.7	Test protective shutdown SR			
	5.8	Test Harmonic Filter			
	5.9	Test important components of the locomotive			
6.	6.0	Running Trial of the locomotive	25-26		
7.	7.0	Final Check List to be verified at the time of Loco dispatch	27		
8.	8.0	Status of RDSO modifications	28		
9.	1-10	Pneumatic Test Parameters	29 - 32		
10.		Loco Check Sheet(LAS)	33		
11.	-	Component History (LAS,ECS,ABS)	34-36		
12.	-	Component History & Testing Parameter (Bogie Shop)	37 - 38		
13	-	Warranty Conditions as per Tenders	39 -41		

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 4204B - ALSTOIN

Type of Locomotive: WAP-7/WAG-9HC

1.0 Continuity Test of the cables

Page: 1 of 27

1.1 Continuity Test of Traction Circuit Cables

As per cable list given in Para 1.3 of document no. 3 EHX 410 124, check the continuity with continuity tester and megger each cable to be connected between following equipment with 1000V megger.

From	То	Continuity (OK/Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Filter Cubicle	Transformer	οK	100 ΜΩ	85°m
Filter Cubicle	Terminal Box of Harmonic Filter Resistor (Roof)	oK	100 ΜΩ	800 m
Filter Cubicle	Earthing Choke	oK	100 ΜΩ	750m.
Earthing Choke	Earth Return Brushes	οK	100 ΜΩ	800 me
Transformer	Power Converter 1	OK	100 ΜΩ	750m
Transformer	Power Converter 2	ok	100 ΜΩ	Boim
Power Converter 1	TM1, TM2, TM3	ok	100 ΜΩ	800m
Power Converter 2	TM4, TM5, TM6	οK	100 ΜΩ	750m
Earth	Power Converter 1	ok	100 ΜΩ	800 M
Earth	Power Converter 2	oК	100 ΜΩ	750 ml

1.2 Continuity Test of Auxiliary Circuit Cables

As per cable list given in Para 1.4 of document no. 3 EHX 410 124, check the continuity with continuity meter and megger each cable to be connected between following equipment with the help of 1000V megger.

Signature of the JE/SSE/Harness

Signature of the JE/SSE/Loco Cabling

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.:

Type of Locomotive: WAP-7/WAG-9HC

Page: 2 of 27

From	То	Continuity(OK/ Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Transformer	BUR1	OK	100 MΩ	600 M/L
Transformer	BUR2	OK	$100\mathrm{M}\Omega$	700 mr
Transformer	BUR3	OK	100 M Ω	600 mr
Earth	BUR1	o K	$100\mathrm{M}\Omega$	700 ML
Earth	BUR2	OK	$100~ extsf{M}\Omega$	600 MR
Earth	BUR3	OK	$100\mathrm{M}\Omega$	TOO MM
BUR1	HB1	OK	$100\mathrm{M}\Omega$	600 Mr
BÜR2	HB2	οK	100 MΩ	JOOMA
HB1	HB2	oK	100 M Ω	600 m/L
HB1	TM Blower 1	OK.	100 ΜΩ	For ma
HB1	TM Scavenge Blower 1	OK	100 ΜΩ	600 mm
HB1	Oil Cooling Unit 1	ÓΚ	$100 extsf{M}\Omega$	600 ma
HB1	Compressor 1	ok	100 M Ω	700 ML
HB1	TFP Oil Pump 1	σK	100 ΜΩ	600 Mr
HB1	Converter Coolant Pump 1	ok	100 ΜΩ	600 M
HB1	MR Blower 1	oK	100 MΩ	700 m/2
HB1	MR Scavenge Blower 1	0K	100 M Ω	600 m
HB1	Cab1	0K	100 ΜΩ	FOO MA
Cab1	Cab Heater 1	ok	100 MΩ	600 m
HB2	TM Blower 2	OK	100 MΩ	600 m
HB2	TM Scavenge Blower 2	ok	100 MΩ	700 m
HB2	Oil Cooling Unit 2	ak	100 MΩ	600 mg
HB2	Compressor 2	010	100 MΩ	Gooms
HB2	TFP Oil Pump 2	ok	100 ΜΩ	Goom
HB2	Converter Coolant Pump 2	OK	100 MΩ	600 mr
HB2	MR Blower 2	0K	100 MΩ ·	70000
HB2	MR Scavenge Blower 2	OK	100 MΩ	600 M2
HB2	Cab2	ok	100 ΜΩ	600 m
Cab2	Cab Heater 2	OK.	100 ΜΩ	600 mr

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Type of Locomotive: WAP-7/WAG-9HC

Page: 3 of 27

Locomotive No.: 420 4 8
1.3 Continuity Test of Battery Circuit Cables

Check continuity of following cables as per Para 2.3 of document no. 3 EHX 610 299

From	То	Condition	Continuity (OK/Not OK)
Battery (wire no 2093)	Circuit breakers 110- 2, 112.1-1, 310.4-1	By opening and closing MCB 112	ok
MCB 110	Connector 50.X7-1	By opening and closing MCB 110	oh
Battery (Wire no. 2052)	Connector 50.X7-2		ok
SB2 (Wire no 2050)	Connector 50.X7-3		ok .

Close the MCB 112, 110, 112.1, and 310.4 and	Prescribed value	Measured
measure the resistance of battery wires 2093, 2052, 2050 with respect to the loco earth.	> 0.5 MΩ	Value <u>&</u> MΩ
Measure the resistance between 2093 & 2052, 2093 & 2050, 2052 &	Prescribed value:	Measured
2050	> 50 MΩ	Value <u>60</u> MΩ

Commission the indoor lighting of the locomotive as per Sheet No 7A & 7B.

1.4 Continuity Test of Screened Control Circuit Cables

Check the continuity and isolation of the screen cable of the following circuits with the help of sheet no. mentioned against each as per document no. 3 EHX 610 299.

Screened control circuit cables for	Corresponding Sheet Nos.	Continuity & Isolation (OK/Not OK)
Battery voltage measurement	04B	OK
Memotel circuit of cab1 &2	10A	ok .
Memotel speed sensor	10A	ch
Primary voltage detection	01A, 12A	ck
Brake controller cab-1 & 2	06F, 06G	ok

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.:48 048

Type of Locomotive: WAP-7/WAG-9HC

Page : 4 of 27

Master controller cab-1 &2	08C, 08D	ak
TE/BE meter bogie-1 & 2	08E, 08F	ok .
Terminal fault indication cab-1 & 2	09F	alt
Brake pipe pressure actual BE electric	06H	ck
Primary current sensors	12B, 12F	σk
Harmonic filter current sensors	12B, 12F	ck
Auxiliary current sensors	12B, 12F	GK .
Oil circuit transformer bogie 1	12E, 12I	ok
Magnetization current	12C, 12G	ak
Traction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-1	12D	ck
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-2	12D	a.k
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-3	12D	ak
Traction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-4	12H	ols
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-5	12H	ek
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-6	12H	BIS
Train Bus cab 1 & 2 (Wire U13A& U13B to earthing resistance=	13A	
10K Ω ± ± 10%)		3K
UIC line	13B	
Connection FLG1-Box TB	13A	ok ak

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 4204%2.0 Low Tension test

Type of Locomotive: WAP-7/WAG-9HC

Page: 5 of 27

2.1 Measurement of resistor in OHMS (Ω)

Measure the resistances of the load resistors for primary voltage transformer, load resistors for primary current transformer and Resistor harmonic filter as per Para 3.2 of the document no. 3 EHX 610 279.

Name of the resistor	Prescribed value	Measured value
Load resistor for primary voltage transformer (Pos. 74.2).	3.9K Ω ± 10%	3.962
Resister to maximum current relay.	1 Ω ± 10%	152
Load resistor for primary current transformer (Pos. 6.11).	3.3 Ω ± 10%	331
Resistance harmonic filter (Pos 8.3). Variation allowed \pm 10%	WAP7	WAP7
Between wire 5 & 6	0.2 Ω	0.27
Between wire 6 & 7	0.2 Ω	0.20
Between wire 5 & 7	0.4 Ω	0.41
For train bus, line U13A to earthing.	10 k Ω ± 10%	10.00
For train bus, line U13B to earthing.	10 k Ω ± 10%	999ks
Insulation resistance of High Voltage Cable from the top of the roof to the earth (by1000 V megger).	200 ΜΩ	300MN
Resistance measurement earth return brushes Pos. 10/1.	≤0.3 Ω	0.292
Resistance measurement earth return brushes Pos. 10/2.	≤0.3 Ω	0.281
Resistance measurement earth return brushes Pos. 10/3.	≤0.3 Ω	0.281
Resistance measurement earth return brushes Pos. 10/4.	≤0.3 Ω	0.305
Earthing resistance (earth fault detection) Harmonic Filter –I; Pos. 8.61.	2.2 kΩ ± 10%	2.272
Earthing resistance (earth fault detection) Harmonic Filter –II; Pos 8.62.	2.7 k Ω ± 10%	2.7K2
Earthing resistance (earth fault detection) Aux. Converter; Pos. 90.3.	3.9 k Ω ± 10%	3.8Ks
Earthing resistance (earth fault detection) 415/110V; Pos. 90.41.	1.8 k Ω ± 10%	1.8K2
Earthing resistance (earth fault detection) control circuit; Pos. 90.7.	390 Ω ± 10%	390A
Earthing resistance (earth fault detection) Hotel load; Pos. 37.1(in case of WAP5).	3.3 k Ω ± 10%	MA
Resistance for headlight dimmer; Pos. 332.3.	10 Ω ± 10%	100

Effective Date: Feb 2022

Doc.No.F/ECS/01
(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter</u>, Auxiliary Converter and TCN based VCU

Locomotive No.: 42049

Type of Locomotive: WAP-7/WAG-9HC

Page : 6 of 27

Make sure that the earthing brush device don't make direct contact with the axle housing, earth connection must go by brushes.

2.2 Check Points

Items to be checked	Remarks	
Check whether all the earthing connection in roof and machine room as mentioned in sheet no. 22A is done properly or not. These earthing connections must be flexible and should be marked yellow & green	cheeked ok	
Check whether all the earthing connection between loco body and bogie is done properly or not. These cables must be flexible having correct length and cross section	checked ok	

2.3 Low Tension Test Battery Circuits (without control electronics)

These tests are done with the help of the special type test loop boxes as per procedure given in Para 3.6 of the document no. 3 EHX 610 279

Name of the test	Schematic used.	Remarks
Test 24V supply	Sheet 04F and other linked sheets	checked on
Test 48V supply	Sheet 04F & sheets of group 09	Fan supply to be checked.
Test traction control	Sheets of Group 08.	ole
Test power supply bus stations.	Sheets of Group 09.	Fan supply to be checked.
Test control main apparatus	Sheets of Group 05.	ok -
Test earth fault detection battery circuit by making artificial earth fault to test the earth fault detection	Sheet 04C	OK-
Test control Pneumatic devices	Sheets of Group 06	
Test lighting control	Sheets of Group 07	als als
Pretest speedometer	Sheets of Group 10	,
Pretest vigilance control and fire system	Sheets of Group 11	ok ok
Power supply train bus	Sheets of Group 13	ole

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 420 48
3.0 Downloading of Software

Type of Locomotive: WAP-7/WAG-9HC

Page: 7 of 27

3.1 Check Points.	Yes/No
Check that all the cards are physically present in the bus stations and all the plugs are connected.	403
Check that all the fibre optic cables are correctly connected to the bus stations.	yes
Make sure that control electronics off relay is not energized i.e. disconnect Sub-D 411.LG and loco is set up in simulation mode.	res
Check that battery power is on and all the MCBs (Pos. 127.*) in SB1 &SB2 are on	res

3.2 Download Software

The software of Traction converter, Auxiliary converter and VCU should be done by commissioning engineer of the firm in presence of supervisor. Correct software version of the propulsion equipment to be ensured and noted:

Traction converter-1 software version:	1.0.6.9
Traction converter-2 software version:	1.0.6.9
Auxiliary converter-1 software version:	1.011.0
Auxiliary converter-2 software version:	2.0.1.0
Auxiliary converter-3 software version:	3.0.1.0
Vehicle control unit -1 software version:	6.0.0.18
Vehicle control unit -2 software version:	6.0.0.18

3.3 Analogue Signal Checking

Check for the following analogue signals with the help of diagnostic tool connected with loco.

Description	Signal name	Prescribed value	Measured Value
Brake pipe pressure	FLG2;0101XPrAutoBkLn	100% (= 5 Kg/cm2)	OK
Actual BE electric	FLG2; AMSB_0201- Wpn BEdem	100% (= 10V)	QL.
TE/BE at 'o' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 9% and 11 %	10.1
TE/BE at 'TE maximal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 99 % and 101 %	150
TE/BE at 'TE minimal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 20 % and 25 %	257.

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u> <u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42048

Type of Locomotive: WAP-7/WAG-9HC

Page: 8 of 27

		· · · · · · · · · · · · · · · · · · ·	•
TE/BE at 'BE maximal' position from both cab	XangTrans FLG2; AMSB_0101- XangTrans	Between 99% and 101%	1004,
TE/BE at 'BE Minimal' position from both cab	FLG1; AMSB_0101- XangTrans FLG2; AMSB_0101- XangTrans	Between 20% and 25%	28),
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1; AMS 0101- LT/BDEM>1/3 HBB2; AMS_0101- LT/BDEM>1/3	Between 42 and 44%	444
TE/BE at '1/3'position in TE and BE mode in both cab.	HBB1; AMS_0101- LT/BDEM>2/3 HBB2; AMS_0101- LT/BDEM>2/3	Between 72 and 74%	741,
Both temperature sensor of TM1	SLG1; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0° C to 40° C	2000
Both temperature sensor of TM2	SLG1; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	19°-
Both temperature sensor of TM3	SLG1; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	198
Both temperature sensor of TM4	SLG2; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	20°C
Both temperature sensor of TM5	SLG2; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	1950
,	SLG2; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	20°C

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48 - 48

Type of Locomotive: WAP-7/WAG-9HC

Page: 9 of 27

3.4 Functional test in simulation mode

Conduct the following functional tests in simulation mode as per Para 5.5 of document no.3EHX 610 281. through the Diagnostic tool/laptop:

Test Function	Result desired in sequence	Result obtained
Emergency shutdown through	VCB must open.	
emergency stop switch 244	Panto must lower.	checked ok
Shut Down through cab activation	VCB must open.	
switch to OFF position	Panto must lower.	checked or
Converter and filter contactor	FB contactor 8.41 is closed.	
operation with both Power	By moving reverser handle:	N
Converters during Start Up.	 Converter pre-charging contactor 12.3 must close after few seconds. 	
	 Converter contactor 12.4 must close. 	1
	Converter re-charging contactor	checked or
	12.3 must opens.	
:	By increasing TE/BE throttle:	
	• FB contactor 8.41 must open.	
	• FB contactor 8.2 must close.	
	• FB contactor 8.1 must close.	
Converter and filter contactor operation with both Power		
Converters during Shut Down.	• VCB must open.) ·
	Panto must lower.	
•	Converter contactor 12.4 must open.	
	• FB contactor 8.1 must open.	cheeled or
	• FB contactors 8.41 must close.	
	• FB contactor 8.2 must remain closed.	

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42048

Type of Locomotive: WAP-7/WAG-9HC

Page: 10 of 27

<u> </u>		
Contactor filter adaptation by	Isolate any one bogie through bogie	1
isolating any bogie	cut out switch. Wait for self-test of	
	the loco.	
	 Check that FB contactor 8.1 is open. 	
	• Check that FB contactor 8.2 is open.	checked ok
•	After raising panto, closing VCB, and	
	setting TE/BE	
	• FB contactor 8.1 closes.	
	• FB contactor 8.2 remains open.	J)
Test earth fault detection battery	By connecting wire 2050 to	T
circuit positive & negative	earth, create earth fault	Y
	negative potential.	
	message for earth fault	
	By connecting wire 2095	J.
	to earth, create earth	cheeked ok
	fault positive potential.	M
	message for earth fault	¥
	Thessage for earth fault)
Test fire system. Create a smoke in	When smoke sensor-1 gets	/
the machine room near the FDU.	activated then) ·
Watch for activation of alarm.		()
waten for activation of alarm.	Alarm triggers and fault	
·	message priority 2	Ĭ .
	appears on screen.	
	When both smoke sensor	Cheeked olf
•	1+2 gets activated then	
	A fault message priority	4
	1 appears on screen and	1.
	lamp LSF1 glow.	k
	• Start/Running interlock occurs and	
	TE/BE becomes to 0.	<u>-{</u>
Time, date & loco number	Ensure correct date time and Loco	
	number	1 ok
		.1

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42048

Type of Locomotive: WAP-7/WAG-9HC

4.0 Sensor Test and Converter Test

Page: 11 of 27

4.1 Test wiring main Transformer Circuits

Apply $198V_p/140V_{RMS}$ to the primary winding of the transformer (at 1u; wire no. 2 at surge arrestor and at 1v; wire no. 100 at earthing choke). Measure the output voltage and compare the phase of the following of the transformers.

Output Winding nos.	Description of winding.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
2U ₁ & 2V ₁	For line converter bogie 1 between cable 801A- 804A	10.05V _p and same polarity	10.0549	Be
2U ₄ & 2V ₄	For line converter bogie 1 between cable 811A- 814A	10.05V _p and same polarity	10.0548	&
2U ₂ & 2V ₂	For line converter bogie 2 between cable 801B- 804B	10.05V _p and same polarity	10.0429	مد
2U ₃ & 2V ₃	For line converter bogie 2 between cable 811B- 814B	10.05V _p and same polarity	10.042	ex.
2U _B & 2V _B	For aux. converter 1 between cable 1103- 1117 (in HB1) For Aux converter 2 between cable 1103- 1117 (in HB2)	7.9V _p , 5.6V _{RMS} and same polarity.	7.8VP 5-6URMS	ak.
2U _F & 2V _F	For harmonic filter between cable 4-12 (in FB)	9.12V _p , 6.45V _{RMS} and same polarity.	9.11 vg 6.44 verns)	gh.

4.2 Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)

Apply $141V_p$ / $100V_{RMS}$ to input of the auxiliary transformer at cable no 1203 –1117 and measure the output at

Description of wire no.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
Cable no. 1218 - 1200	58.7V _p , 41.5V _{RMS} and opposite polarity.	58.748 41.54pms	. بى رو
Cable no. 1218 – 6500	15.5V _p , 11.0V _{RMS} and opposite polarity.	153578	3 ₁
4.0		11.0.1000	

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter</u>, Auxiliary Converter and TCN based VCU

Locomotive No.: 42048

Type of Locomotive: WAP-7/WAG-9HC

Page: 12 of 27

4.3 Primary Voltage Transformer

Apply $250V_{eff}/350V_p$ by variac to roof wire 1 and any wire 0 and measure the magnitude and polarity of the output of the primary voltage transformer for both bogies as per the procedure specified and suggested by the traction converter manufacturer. Primary voltage measurement converters (Pos. 224.1/*) & catenary voltmeter (Pos. 74/*)

This test is to be done for each converter.

Activate cab in driving mode and supply $200V_{RMS}$ through variac to wire no 1501 and 1502. Monitor the following parameters through Diagnostic tool and in catenary voltmeter.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1_G 87-XUPrim	25kV	250%	35kv	850 Y.
SLG2_G 87-XUPrim	25 kV	250%	25 KV	250 ×

Decrease the supply voltage below $140 \, V_{RMS}$. VCB must open at this voltage. In this case the readings in Diagnostic Tool and catenary voltmeter will be as follows.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1_G 87-XUPrim	17kV	170%	17 ku	170%
SLG2_G 87-XUPrim	17 kV	170%	12 In	1204

Reactivate VCB to on by increasing this voltage to 175% (17.5 kV).

Increase the supply to 240 V_{RMS} through variac. VCB must open at this voltage, In this case the readings in diagnostic tool and catenary voltmeter will be as follows:

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1_G 87-XUPrim	30kV	300%	30 kv	300 X.
SLG2_G 87-XUPrim	30 kV	300%	30 KV	300 X

Reactivate VCB to on by decreasing this voltage to 290% (29 kV).

Effective Date: Feb 2022

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 480 48

Type of Locomotive: WAP-7/WAG-9HC

Page: 13 of 27

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

4.4 Minimum voltage relay (Pos. 86)

Functionality test:

Minimum voltage relay (Pos. 86) must be adjus	ted to approx 68%
Activate loco in cooling mode. Check Power supply of 48V to minimum voltage relay. Disconnect primary voltage transformer (wire no. 1511 and 1512) from load resistor (Pos. 74.2) and connect variac to wire no. 1501 and 1502. Supply 200V _{RMS} through variac. In this case; <i>Minimum voltage relay (Pos. 86) picks up</i>	(Yes/No)
Try to activate the cab in driving mode: Contactor 218 do not close; the control electronics is not be working.	(Xes/No)
Turn off the variac : Contactor 218 closes; the control electronics is be working	(Xes/No)
Test Under Voltage Protection	
Activate the cab in cooling mode; Raise panto; Supply 200V _{RMS} through variac to wire no. 1501 & 1502; Close the VCB; Interrupt the supply voltage The VCB goes off after 2 second time delay.	(Xes/No)
Again supply 200V _{RMS} through variac to wire no. 1501 & 1502; Decrease the supply voltage below 140V _{RMS} ± 4V; Fine tune the minimum voltage relay so that VCB opens.	(Yes/No)

4.5 Maximum current relay (Pos. 78)

4.5 Iviaximum current relay (Pos. 78)	4.			
Disconnect wire 1521 & 1522 of primary current transformer; Connect variac to wire 1521 & 1522 (including the resistor at Pos. 6.11); Put loco in simulation for driving mode; Open R ₃ – R ₄ on contact 136.3; Close VCB; supply 3.6A _{RMS} at the open wire 1521; Tune the drum of the maximum current relay Pos. 78 for correct over current value;				
VCB opens with Priority 1 fault message on display.	(Xes/No)			
Keep contact $R_3 - R_4$ of 136.3 closed; Close VCB; Tune the /9.9 A_p at the open wire 1521;	e resistor 78.1 for the current of 7.0A _{RMS}			
VCB opens with Priority 1 fault message on display.	√(Yes/No)			
	1			

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 4 20 4 8

Type of Locomotive: WAP-7/WAG-9HC

Page: 14 of 27

4.6 Test current sensors

Name of the sensor	Description of the test	Prescribed value	Set/Measured value
Primary return current sensor (Test-1,Pos.6.2/1 & 6.2/2)	Activate cab in driving mode supply 10A. Measure the current through diagnostic tool or measuring print.	(Variation allowed is ± 10%)	,,
Primary return current	Supply 90mA _{DC} to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)		()
sensor (Test-2, Pos.6.2/1 & 6.2/2)	Supply 297mA _{DC} to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)		2-97mg
Auxiliary winding current sensor (Pos. 42.3/1 & 42.3/2)	Supply 90mA _{DC} to the test winding of sensor through connector 415.AC/1or 2 pin no. 7(+) & 8(-) Supply 333mA _{DC} to the test winding of sensor through connector 415.AC/1 or 2 pin no. 7(+) & 8(-)	7	335mB
Harmonic filter current sensors (Pos.8.5/1 &8.5/2)	Supply 90mA _{DC} to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)		-
	Supply 342mA _{DC} to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)		345ma
Hotel load current sensors (Pos. 33/1 &	Switch on hotel load. Supply 90mA _{DC} to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) & 8(-)	NA	PLA
33/2)	Supply 1242mA _{DC} to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) & 8(-)	MA	Hr

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter</u>, Auxiliary Converter and TCN based VCU

Locomotive No.: 42048

Type of Locomotive: WAP-7/WAG-9HC

4.7 Test DC Link Voltage Sensors (Pos 15.6/*)

Page: 15 of 27

This test is to be done by the commissioning engineer of the firm if required.

4.8 Verification of Converter Protection Circuits (Hardware limits) -

This test is to be done as per para 6.17 of the document no. 3EHX 610 282 for both the converters.

Protection circuits	Limit on which shutdown	Measured limit
	should take place	
Current sensors (Pos 18.2/1, 18.2/2, 18.2/3, 18.4/4, 18.5/1, 18.5/2, 18.5/3) for Power Converter 1	Increase the current quickly in the test winding of the current sensors, VCB will off at 2.52A with priority 1 fault for each sensor.	For 18.2/1= For 18.2/2= For 18.2/3= For 18.4/4= For 18.5/1=
		For 18.5/2= For 18.5/3=
Current sensors (Pos 18.2/1, 18.2/2, 18.2/3, 18.4/4, 18.5/1, 18.5/2, 18.5/3) for Power Converter 2	Increase the current quickly in the test winding of the current sensors, VCB will off at 2.52A with priority 1 fault for each sensor.	For 18.2/1= For 8.2/2= For 18.2/3= For 18.4/4= For 18.5/1= For 18.5/2= For 18.5/3=
Fibre optic failure In Power Converter1	Remove one of the orange fibre optic plugs on traction converter. VCB should trip	ok
Fibre optic failure In Power Converter2	Remove one of the orange fibre optic plugs on traction converter. VCB should trip	ck

4.9 Sequence of BUR contactors

The sequence of operation of BUR contactors for 'ALL BUR OK' BUR 1 out BUR 2 out and BUR 3 out condition has to be verified by putting the Loco in driving mode (VCB should not be closed) and isolating the BURs one by one. In these condition following will be the contactor sequence.

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
AI BUR OK	Close	Open	Close	Open	Close	Open	Close	Close	Open
BUR1 off	Close	Open	Close	Close	Open	Close	Open	Open	Close
BUR2 off	Open	Open	Close	Close	Close	Close	Open	Open	Close
BUR3 off	Open	Close	Open	Close	Close	Close	Open	Open	Close

y

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48048

Type of Locomotive: WAP-7/WAG-9HC

Page: 16 of 27

Monitored contactor sequence

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
Al BUR OK	close	den	clara	2002	cesse	Den	clara	10020	Nen
BUR1 off	clase	da	close	- 1	1	cesse			llake
BUR2 off	olen.	coe.	Oane		7	care	Olem	Des	(0020
BUR3 off	Pen	CONTR	0 .		Caso		Nen	den	Clorse

5.0 Commissioning with High Voltage

5.1 Check List

Items to be checked	Yes/No
Fibre optic cables connected correctly.	yes
No rubbish in machine room, on the roof, under the loco.	Ves
All the electronic Sub-D and connectors connected	400
All the MCBs of the HB1 & HB2 open.	40
All the three fuses 40/* of the auxiliary converters	yes
The fuse of the 415/110V auxiliary circuit (in HB1) open.	yes.
Roof to roof earthing and roof to cab earthing done	Yes
Fixing, connection and earthing in the surge arrestor done correctly.	103
Connection in all the traction motors done correctly.	10
All the bogie body connection and earthing connection done correctly.	ves.
Pulse generator (Pos. 94.1) connection done correctly.	403
All the oil cocks of the gate valve of the transformer in open condition.	40
All covers on Aux & Power converters, Filter block, HB1, HB2 fitted	Voi
KABA key interlocking system.	405

5.2 Safety test main circuit breaker

Prepare to switch off the catenary supply during the first charging of the locomotive in case of any unexpected behavior of the electrical component of the loco. Charge the loco for the first time by closing BLDJ switch. The VCB will trip after certain time as no oil/coolant pumps are running yet.

Perform the following safety test of main circuit breaker through both the cabs of the locomotive.

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48048

Type of Locomotive: WAP-7/WAG-9HC

Page : 17 of 27

Name of the test	Description of the test	Expected result	Monitored result
Emergency stop in cooling mode	Raise panto in cooling mode. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	checked or
Emergency stop in driving mode	Raise panto in driving mode in. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	checkesok
Under voltage protection in cooling mode	Raise panto in cooling mode. Close the VCB. Switch off the supply of catenary by isolator	VCB must open.	checked ob
Under voltage protection in driving mode	Raise panto in driving mode. Close the VCB. Switch off the supply of catenary by isolator	VCB must open with diagnostic message that catenary voltage out of limits	cheekel ok
Shut down in cooling mode.	Raise panto in cooling mode. Close the VCB. Bring the BL- key in O position.	VCB must open. Panto must lower.	checkes ot
Shutdown in driving mode	Raise panto in driving mode. Close the VCB. Bring the BL-key in O position.	VCB must open. Panto must lower.	checked ob
Interlocking pantograph- VCB in cooling mode	Raise panto in cooling mode. Close the VCB. Lower the pantograph by ZPT	VCB must open.	checked ob
Interlocking pantograph- VCB in driving mode	Raise panto in driving mode. Close the VCB. Lower the pantograph by ZPT		cheeked of

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42048

Type of Locomotive: WAP-7/WAG-9HC

Page: 18 of 27

5.3 Auxiliary Converter Commissioning

Switch on the high voltage supply and set up the loco in driving mode. Raise the panto. Close the VCB. Check that there is no earth fault in the auxiliary circuit, Switch off the VCB. Lower the panto. Create the earth fault in auxiliary circuit by making connection between wire no 1117(in HB2 cubicle) and earth. After 3 minutes a diagnostic message will come that "Earth fault auxiliary circuit."

5.3.1 Running test of 3 ph. auxiliary equipments

Switch on the 3 ph. auxiliary equipment one by one. Check the direction of rotation of each auxiliary machine and measure the continuous current and starting current drawn by them.

Name of the auxiliary machine	Typical phase current	Measured continuous phase current	Measured starting phase current
Oil pump transformer 1	9.8 amps	8.5	9.2
Oil pump transformer 2	9.8 amps	8.6	9.4
Coolant pump converter 1	19.6 amps	5-6	6.9
Coolant pump converter 2	19.6 amps	5.7	7.1
Oil cooling blower unit 1	40.0 amps	35.7	182.0
Oil cooling blower unit 2	40.0 amps	35.0	170.3
Traction motor blower 1	34.0 amps	29.9	(13.0
Traction motor blower 2	34.0 amps	29.5	151.0
Sc. Blower to Traction motor blower 1	6.0 amps	. 3.1	13.1
Sc. Blower to Traction motor blower 1	6.0 amps	3.2	9.3
Compressor 1	25 amps at 0 kg/cm ² 40 amps at 10 kg/cm ²	24.7	39.6
Compressor 2	25 amps at 0 kg/ cm ² 40 amps at 10 kg/ cm ²	24.4	40.5

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42048

Type of Locomotive: WAP-7/WAG-9HC

Page: 19 of 27

5.3.2 Performance of Auxiliary Converters

Measure the performance of the auxiliary converters through software and record it. **BUR1 (Condition: Switch off all the load of BUR 1)- to be filled by commissioning engineer of the firm.**

Signal name	Description of the signal	Prescribed value	Monitored value	Value under Limit (Yes/No)
BUR1 7303 XUUN	Input voltage to BUR1	75% (10%=125V)	10014	79
BUR1 7303 XUUZ1	DC link voltage of BUR1	60% (10%=100V)	636 V	Yes
BURI 7303 XUIZI	DC link current of BUR1	0% (10%=50A)	1 Am	Yen

BUR2 (Condition: Switch off all the load of BUR 2, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed value by the firm	Monitored value	Value under Limit (Yes/No)
BUR2 7303-XUUN	Input voltage to BUR2	75% (10%=125V)	938V	16)
BUR2 7303-XUUZ1	DC link voltage of BUR2	60% (10%=100V)	6374	Ye,
BUR2 7303-XUIZ 1	DC link current of BUR2	1% (10%=50A)*	7 Amb	Yej
BUR2 7303-XUILG	Current battery charger of BUR2	3% (10%=100Å)*	2100	Yey
BUR2 7303-XUIB1	Current battery of BUR2	1.5%(10%=100A)*	1) Am	Yey
BUR2 7303 -XUUB	Voltage battery of BUR2	110%(10%=10V)	1100	Yes

^{*} Readings are dependent upon charging condition of the battery.

BUR3 (Condition: Switch off all the load of BUR 3, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed set value by the firm	Monitored value	Value under limit (Yes/No)
BUR3 7303-XUUN	Input voltage to BUR3	75% (10%=125V	9984	Yey
BUR3 7303- XUUZ1	DC link voltage of BUR3	60% (10%=100V)	6375	Yes
BUR3 7303-XUIZ 1	DC link current of BUR3	1% (10%=50A)*	7 Amb	Yey
BUR3 7303-XUILG	Current battery charger of BUR 3	3% (10%=100A)*	2 1 Bus	Yes
BUR3 7303-XUIB1	Current battery of BUR 3	1.5%(10%=100A)*	1)19m	Yey
BUR3 7303-XUUB	Voltage battery of BUR 3	110%(10%=10V)	110~	74

* Readings are dependent upon charging condition of the battery.

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 4204

Type of Locomotive: WAP-7/WAG-9HC

Page : 20 of 27

5.3.3 Performance of BURs when one BUR goes out

When any one BUR goes out then rest of the two BURs should take the load of all the auxiliaries at ventilation level 3 of the locomotive.

Condition of BURs	Loads on BUR1	Loads in BUR2	Loads in BUR3
All BURs OK	Oil Cooling unit 1&2	TM blower1&2, TFP oil pump 1&2, SR coolant pump 1&2.	Compressor 1&2, Battery charger and TM Scavenger blower 1&2
BUR 1 out		Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2,TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.
BUR 2 out	Oil Cooling unit 1&2, TM blower 1&2, TM Scavenger blower 1&2		Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.
BUR 3 out	Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.	

5.4 Auxiliary circuit 415/110

For checking earth fault detection, make a connection between wire no. 1218 and vehicle body. On switching on VCB, Earth fault relay 89.5 must pick up and after 3 minutes a message will come in the Diagnostic display that Earth Fault 415/110V Circuit

Switch on the 1 ph. auxiliary equipment one by one. Check the direction of rotation of each auxiliary machine and measure the continuous current and starting current drawn by them.

Name of the auxiliary machine	Typical phase current	Measured phase current	Measured starting current
Machine room blower 1	15.0 amps*	3.7	12.8
Machine room blower 2	15.0 amps*	3.9	11.7
Sc. Blower to MR blower 1	1.3 amps	1:4	2.6
Sc. Blower to MR blower 2	1.3 amps	1.5	2.3
Ventilator cab heater 1	1.1 amps	1-4	2.0
Ventilator cab heater 2	1.1 amps	1.4	6.8
Cab heater 1	4.8 amps	4.7	4.8
Cab heater 2	4.8 amps	4.7	4.8

^{*} For indigenous MR blowers.

Z

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 420 48

Type of Locomotive: WAP-7/WAG-9HC

Page: 21 of 27

5.5 Hotel load circuit (Not applicable for WAG-9HC)

For WAP-7 locomotive with Hotel load converter refer to Annexure-HLC

5.6 Traction Converter Commissioning

This test is carried out in association with Firm.

Traction converter commissioning is being done one at a time. For testing Converter 1, switch off the traction converter 2 by switch bogie cut out switch 154. For testing Converter 2, switch off the traction converter 2 by switch bogie cut out switch 154. Isolate the harmonic filter also by switch 160. Start up the loco by one converter. Follow the functionality tests.

For Converter 1

Test Function	Results desired	Result obtained
Measurement of charging and pre-charging and charging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheekesob
Measurement of discharging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked ok
Earth fault detection on positive potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	chceleed ok
Earth fault detection on negative potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked ok
Earth fault detection on AC part of the traction circuit of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked ok
Pulsing of line converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked ok
Pulsing of drive converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheeleed ok

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 420 📆

Type of Locomotive: WAP-7/WAG-9HC

Page: 22 of 27

For Converter 2

Test Function	Results desired in sequence	Result obtained
Measurement of charging and pre-charging and charging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheeked ok
Measurement of discharging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked of
positive potential of DC Link of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked op
· ·	Traction converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/v	cheeked ok
AC part of the traction circuit of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Checkes of
Pulsing of line converter of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheeked ox
Pulsing of drive converter of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	Cheeked ok

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter</u>, Auxiliary Converter and TCN based VCU

Locomotive No.: 48048

Type of Locomotive: WAP-7/WAG-9HC

Page: 23 of 27

5.7 Test protective shutdown SR

Test Function	Results desired in sequence	Result obtained
Measurement of protective shutdown by Converter 1 electronics.	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Remove one of the orange fibre optic feedback cable from converter 1Check that converter 1 electronics produces a protective shut down. • VCB goes off • Priority 1 fault mesg. on DDU appears	checked ok
	Disturbance in Converter 1	·
Measurement of protective shutdown by Converter 2 electronics.	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Remove one of the orange	
electionics.	fibre optic feedback cable from converter 2. Check that converter 2 electronics produces a protective shut down. • VCB goes off	cheeked ok
	 Priority 1 fault mesg. on diagnostic display appears Disturbance in Converter 2 	

5.8 Test Harmonic Filter

Switch on the filter by switch 160

Test Function	Results desired in sequence	Result obtained
Measurement of filter currents	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Apply a small value of TE/BE by moving the throttle. • FB contactor 8.41 must open.	checked ok

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48048

Type of Locomotive: WAP-7/WAG-9HC

Page: 24 of 27

	 FB contactor 8.2 must close. FB contactor 8.1 must close Check the filter current in diagnostic laptop Bring the TE/BE throttle to O Switch off the VCB FB contactor 8.1must open. FB discharging contactor 8.41 must close Check the filter current in diagnostic laptop 	checkes ok
Test earth fault detection harmonic filter circuit.	Make a connection between wire no. 12 and vehicle body. Start up the loco. Close VCB. • Earth fault relay 89.6 must pick up. • Diagnostic message comes that - Earth fault in harmonic filter circuit	Useked ok
Test traction motor speed sensors for both bogie in both cabs	Traction converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/ PLW	ok

5.9 Test important components of the locomotive

Items to be tested	Description of the test	Monitored value/remarks
Speedometer	VCU converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/ PLW	chelkes or
Time delay module of MR blower	The time after which the starting capacitor for MR blower should go off the circuit should be set to 10-12 seconds	checked ok
Ni-Cd battery voltage	At full charge, the battery voltage should be 110V DC.	cheeleelok
Flasher light	From both cab flasher light should blink at least 65 times in one minute.	cheeked of
Head light	Head light should glow from both cabs by operating ZLPRD. Dimmer operation of headlight should also occur by operating the switch ZLPRD.	cnecked ob

G

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48,43

Type of Locomotive: WAP-7/WAG-9HC

Page: 25 of 27

		•
Marker light	Both front and tail marker light should glow from both the cabs	chelked ok
Cab Light	Cab light should glow in both the cabs by operating the switch ZLC	enedles or
Spot lights	Both Drivers and Asst. Drivers Spot light should glow in both cabs by operating ZLDD	checkesulo
Instrument lights	Instrument light should glow from both cab by operating the switch ZLI	checked of
Illuminated Push button	All illuminated push buttons should glow during the operation	checked of
Contact pressure of the high rating contactors	The contact pressure of FB contactors (8.1, 8.2) is to be measured Criteria: The minimum contact pressure is 54 to 66 Newton.	For contactor 8.1: For contactor 8.2:
Crew Fan	All crew fans should work properly when VCB of the loco is switched on. The airflow from each cab fan is to be measured. Criteria: The minimum flow of air of cab fan should be 25 m ³ /minute	Cab 1 LHS: Cab 1 RHS: Cab 2 LHS: Cab 2 RHS:

6.0 Running Trial of the locomotive

SN	Description of the items to be seen during trail run	The state of the s		
1	Cab activation in driving mode	No fault message should appear on the diagnostic panel of the loco.	Chelked a	
	Loco charging	Loco to be charged and all auxiliaries should run. No fault message to appear on the diagnostic panel of the loco. Raise MR pressure to 10 Kg/cm ² , BP to 5 Kg/cm ² , FP to 6 Kg/cm ² .	oCnelled o	
3.	Check function of Emergency push stop.	This switch is active only in activated cab. By pushing this switch VCB should open & pantograph should be lowered.	checkes of	
4.	Check function of BPCS.	 Beyond 5 kmph, press BPCS, the speed of loco should be constant. BPCS action should be cancelled by moving TE/BE throttle, by dropping BP below 4.75 Kg/cm², by pressing BPCS again. 	credies	
5.	Check train parting operation of the Locomotive.	Operate the emergency cock to drop the BP Pressure LSAF should glow.	medee	

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48.48

Type of Locomotive: WAP-7/WAG-9HC

Page: 26 of 27

6.	Check vigilance	Set the speed more than 1.5 kmph and ensure that	
	operation of the	brakes are released i.e. BC < 1 Kg/cm ² .	
	locomotive	For 60 seconds do not press vigilance foot switch or	
		sanding foots switch or TE/BE throttle or BPVG	
		switch then	
		Buzzer should start buzzing.	
		 LSVW should glow continuously. 	
		Do not acknowledge the alarm through BPVG or	6 Checked ok
		vigilance foot switch further for 8 seconds then:-	
		Emergency brake should be applied	
		automatically.	
-		VCB should be switched off.	
		Resetting of this penalty brake is possible only after	
		32 seconds by bringing TE/BE throttle to 0 and	1
		acknowledge BPVR and press & release vigilance	./
		foot switch.	J
7.	Check start/run interlock	• At low pressure of MR (< 5.6 Kg/cm ²).	checked o k
		With park brake in applied condition.	-na
		• With direct loco brake applied (BP< 4.75Kg/cm ²).	Cheekes of
		• With automatic train brake applied (BP<4.75Kg/cm ²).	4
		• With emergency cock (BP < 4.75 Kg/cm ²).	
8.	Check traction interlock	Switch of the brake electronics. The	7
		Tractive /Braking effort should ramp down, VCB	chakeloh
		should open and BP reduces rapidly.	┦.
9.	Check regenerative	Bring the TE/BE throttle to BE side. Loco speed	7 Clades lala
	braking.	should start reducing.	Chedred ok
10.	Check for BUR	In the event of failure of one BUR, rest of the two	7
	redundancy test at	BURs can take the load of all the auxiliaries. For this	
	ventilation level 1 & 3 of	switch off one BUR.	charted ok
	loco operation	Auxiliaries should be catered by rest of two BURs.	
		Switch off the 2 BURs; loco should trip in this case.	
11.	Check the power	Create disturbance in power converter by switching)
	converter	off the electronics. VCB should open and converter	cherkes ok
	isolation test	should get isolated and traction is possible with	. (
		another power converter.	1

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48 9 48

Type of Locomotive: WAP-7/WAG-9HC

Page: 27 of 27

7.0 Final check list to be verified at the time of Loco dispatch

Condition /Operations of the following items are to be checked:

SN	Item	Cab-1	Cab-2	Remarks
1	Head lights	ok	ov)
2	Marker Red	OK.	ok	
3	Marker White		ok	
4	Cab Lights	OK OK	ok l	
5	Dr Spot Light	ok	at l	checkes working
6	Asst Dr Spot Light	40	a h	o concrete desirence
7	Flasher Light	ok .		
8	Instrument Lights	ok	OK OK	
9	Corridor Light	d<	ok ok	
10	Cab Fans	ol<	ok	
11	Cab Heater/Blowers	al al	ak	
12	All Cab Signal Lamps Panel 'A'	de	ok)	

Status of RDSO modifications

LOCO NO: 42049

n	Modification No.	Description	Remarks	
		Modification in control circuit of Flasher Light and Head Light of	/	
1.		three phase electric locomotives.	Sk/Not Ok	
-	Rev. '0' Dt 20.02.08	three phase electric locomotives.	2	
_		Modification to voltage sensing circuit in electric locomotives.	Z	
2		Modification to voltage sensing should in stocking should	Ok/Not Ok	
- 1	Rev.'0' Dt 22.04.09			
3.	RDSO/2010/EL/MS/0390	Paralleling of interlocks of EP contactors and Relays of three	K/Not Ok	
٠	Rev.'0' Dt 31.12.10	phase lecomotives to improve reliability		
4.	RDSO/2011/EL/MS/0399	Removal of interlocks of control circuit contactors no. 126 from	6k/Not Ok	
"	Rev.'0' Dt 08.08.11	MCDA circuit	·	
5.	RDSO/2011/EL/MS/0400	Modification sheet for shifting the termination of \$GKW, 1.8 KV,	'	
٠. ا	Rev.'0' Dt 10.08.11	70 ag mm cables and 2x2 5 sg mm cables housed in lower portion	Ok/Not Ok	
		of HB2 panel and provision of Synthetic resin borded glass liber		
		-k-at for three phase locometives		
6.	RDSO/2011/EL/MS/0401	Modification sheet for relaying of cables in HB-2 panel of three	Ok/Not Ok	
	Rev.'0' Dt 10.08.11		/	
7.	RDSO/2011/EL/MS/0403	Auto switching of machine room/corrections lights to avoid draining of	Ok/Not Ok	
	Rev.'0' Dt 30.11.11	batteries in three phase electric locorriouves.	√	
8.	RDSO/2012/EL/MS/0408	Modification of terminal connection of heater cum blower	Ok/Not Ok	
- '	Rev.'0'	assembly.	V	
9.	RDSO/2012/EL/MS/0411	Modification sheet to avoid simultaneous switching ON of White	Ok/Not Ok	
	Rev.'1' dated 02.11.12	and Red marker light in three phase electric locomotives.	V	
10	RDSO/2012/EL/MS/0413	Paralleling of interlocks of EP contactors and auxiliary contactors	Ok/Not Ok	
	Rev.'1' Dt 25.04.16	of three phase locomotives to improve reliability.	V	
11	RDSO/2012/EL/MS/0419	Modification sheet to provide rubber sealing gasket in Master	Ok/Not Ok	
	Rev.'0' Dt 20,12.12	Controller of three phase locomotives.		
12	RDSO/2013/EL/MS/0420	Modification sheet to provide mechanical locking arrangement in	Ok/Not Ok	
	Rev.'0' Dt 23.01.13	Primary Over Current Relay of three phase locomotives.	Olympia Oly	
13		Modification sheet for improving illumination of head light in	Ok/Not Ok	
	Rev.'0' Dt 22.05.13	dimmer mode in three phase electric locomotives. Modification sheet of Bogie isolation rotary switch in three phase	Ok/Not Ok	
14		Modification sneet of boyle isolation folding switch in and production	Ók/Not Ok	
	Rev.'0' Dt 18.07.13	electric locomotives. Modification sheet for MCP control in three phase electric	Ok/Not Ok	
15			Ok/Not Ok	
<u>.</u>	Rev.'0' Dt 23.10.13	locomotives. Modification sheet for relocation of earth fault relays for harmonic		
16		filter and hotel load along with its resistors in three phase electric	Ok/Not Ok	
	Rev.'0' Dt 10.12.13	l la a amondiu con		
		locomotives. Removal of shorting link provided at c-d terminal of over current	Ok/Not Ok	
17		raiov of three phase electric locomotives.	ON NOT OR	
	Rev.'0' Dt 12.03.14 B RDSO/2017/EL/MS/0464	A Decision of Auvillary interlock for monitoring of Figure 100 like on	Ok/Not Ok	
18	RDSO/2017/EL/NIS/0404	1 /o 4)/adaption /9 2) Contactor in GTU/IGBT IOCOHOUVES.	-	
40	Rev.'0' Dt 25.09.17		Ok/Not Ok	
18		electric locomotives		
 	Rev.'0' Dt 07.12.17 RDSO/2018/EL/MS/0479		Ok/Not Ok	
20		of 3 phase electric locomotives.	0	
<u> </u>	Rev.'0' 1 RDSO/2019/EL/MS/047		Ok/Not Ok	
2	Rev.'0' Dt 18.09.19	A Hillipson of Reserve and a second a second and a second a second and	OKINOL OK	
		0 Recording of Flasher light operation either due to fault or manually	1	
22	2 RDSO/2024/EL/MS/050	by Loco Pilot in case of emergency with time stamping in VCU of	Ok/Not Ok	
l	Rev '0' Dt. 13.09.2024	3-phase Electric Locomotives.		
\vdash			20000000	
2	3 RDSO/2024/EL/MS/050		Ok/Not Ok	
	Rev '0' Dt 10.10.2024	Locomotives.		
2	4 RDSO/2024/EL/MS/050	3 Paralleling of interlocks of control circuit contactor to improve	Ok/Not Ok	
1	Rev '0' Dt 17.09.2024	reliability of three phase electric locomotives		
<u></u>	·	14 Isolation of Harmonic Filter from 3-phase locomotives fitted with		
2	5 RDSO/2024/EL/MS/050 Rev '0' Dt 21:11.2024	M/s Alstom (BTIPL), CGPISL and Medha make IGBT based	j Ŏk/Not Ok	
	I Rev U DCZTITZUZ4	PI/S MISCOII (DITIE)/ COLLEC BIR LIGHT	1 '	

Signature of JE/SSE/ECS

Loco No.: 42048

PLW/PATIALA

PNEUMATIC TEST PARAMETERS OF 3-PHASE ELECTRIC LOCOMOTIVES

(As per DG/RDSO/LKO's letter No.-EL/3.2.19/3phase, dated-29.03.2012)

SN	Parameters	Reference	Value	Result
	Brake Panel: M/s Faiveley			
1.0	Auxiliary Air supply system (Pantograph & VCB)			
1.1	Ensure, Air is completely vented from pantograph			0
	Reservoir (Ensure Panto gauge reading is Zero)			
1.2	Turn On BL Key. Now MCPA starts.		60 sec. (Max.)	59 sec
	Record pressure Build up time (8.0 kg/cm2)			
1.3	Auxiliary compressor safety Valve 23F setting	Faiveley Doc. No.	8.5±0.25kg/cm2	8.55 Kg/cm2
		DMTS-014-1, 8 CLW's	-	
		check sheet no.		
		F60.812 Version 2		
1.4	Check VCB Pressure Switch Setting	CLW's check sheet	Opens 4.5±0.15	4.55 Kg/cm2
		no. F60.812 Version 2	kg/cm2, closes	
			5.5±0.15 kg/cm2	5.55 Kg/cm2
1.5	Set pantograph Selector Switch is in Auto, Open pan-1&2 Is	solating Cocks & KABA co	ock by Key (KABA Key)
1.6	Set Cab-1 Pan UP in Panel A.		Observed Pan-2	ОК
			Rises.	
1.7	Close Pan-2 isolating Cock		Panto-2 Falls Down	ОК
	Open Pan -2 isolating Cock		Panto-2 Rises	
1.8	Record Pantograph Rise time		06 to 10 seconds	8 Sec
1.9	Record Pantograph Lowering Time		06 to 10 seconds	9 Sec
1.10	Panto line air leakage		0.7 kg/cm2 in 5	0.10 kg/cm2
			Min.	in 5 Min.
1.11	High Reach Panto emergency test and reset.			ok
2.0	Main Air Supply System			
2.1	Ensure, Air is completely vented from locomotive. Drain	Theoretical		
	out all the reservoirs by opening the drain cocks and then	calculation and		
	closed drain cocks. MR air pressure build up time by each	test performed by		
	compressor from 0 to 10 kg/cm2.	Railways.		
	i) with 1750 LPM compressor		i) 7 mins Max.	6 min. & 45
	ii) with 1450 LPM compressor		ii) 8.5 mins Max.	sec.
2.2	Drain air below MR 8 kg/cm2 to start both the		Check Starting of	ok
	compressors		both compressors	
2.3	Drain air from main reservoir up to 7 kg/cm2. Start		30 Sec. (Max)	CP1-28 Sec
	compressors, Check pressure build time of individual			
	compressor from 8 kg/cm2 to 9 kg/cm2			CP2-29 Sec
2.4	Check Low MR Pressure Switch Setting (37)	D&M test spec.	Closes at 6.40±0.15	6.50 Kg/cm2
		MM3882 &	kg/cm2 Opens at	
		MM3946	5.60±0.15kg/cm2	5.65 Kg/cm2
2.5	Check compressor Pressure Switch RGCP setting (35)	D&M test spec.	Opens at 10±0.20	10 Kg/cm2
		MM3882 &	kg/cm2, Closes	
		MM3946	at 8±0.2kg/cm2	8 Kg/cm2
2.6	Run both the compressors Record Pressure build up time	Trial results	3.5 Minutes Max.	3.45 minute

PLW/PATIALA

Loco No.: 42048

2.8 Check Auto Drain Valve functioning (124 & 87)	2.7	Check unloader val	ve operation				OK/Not OK	ОК
Direct by BLCP	2.8						Compressor	-
	2.9	Direct by BLCP.		(10/1). Run CP	-			11.5 Kg/cm2
valve to reset at pressure 1.2 kg/cm2 less than opening pressure. 2.12 BP Pressure: Switch 'OFF' compressor, Drain MR Pressure by drain cock of 1" Main Reservoir, Start Compressor, check setting pressure of Duplex Check Valve 92F. 2.13 FP pressure: FF pressure: FF pressure: FF pressure: FF pressure in Gauge. 3.0 Air Dryer Operation 3.1 Open Drain Cock 90 of 2"d MR to start Compressor, leave open for Test Check Air Dryer Towers to change. 3.2 Check Purge Air Stops from Air Dryer at Compressor stops 3.3 Check condition of humidity indicator 4.0 Main Reservoir Leakage Test 4.1 Put 10 Brake (A-9) in full service, Check MR Pressure air leakage from both cabs. Check BP Air leakage (isolate BP charging cock-70) Brake Test (Automatic Brake operation) 5.1 Record Brake Pipe & Brake Cylinder pressure at Each Step Check proportionality of Auto Brake system CLW's check sheet no. F60.812 Version 2 Tower to change every minute Tower to change every minute Auto Condition of humidity indicator Blue Blue Blue Blue Blue Blue Blue Blue Blue Check BP Air leakage (isolate BP charging cock-70) D&M test spec. MM3882 & MM3946 M3882 & MM3946 Check BP Air leakage (isolate BP charging cock-70) Brake Test (Automatic Brake operation) F60.812 Version 2 CLW's check sheet no. F60.812 Version 2 CLW's check sheet no. F60.812 Version 2 CLW's check sheet no. F60.812 Version 2 BC (WAG-9 & WAP-7) Kg/cm2 Auto controller position BP Pressure kg/cm2 Value Result Va	2.10	direct by BLCP			MM3882	& MM3946		11.5 Kg/cm2
by drain cock of 1" Main Reservoir, Start Compressor, check setting pressure of Duplex Check Valve 92F. 2.13 FP pressure:	2.11	valve to reset at pro						
Pr pressure:	2.12	by drain cock of 1"	Main Reservoir, Sta	rt Compressor,			5.0±0.10kg/cm2	5.0 Kg/cm2
3.1 Open Drain Cock 90 of 2 nd MR to start Compressor, leave open for Test Check Air Dryer Towers to change. 3.2 Check Purge Air Stops from Air Dryer at Compressor stops 3.3 Check condition of humidity indicator 4.0 Main Reservoir Leakage Test 4.1 Put Auto Brake (A-9) in full service, Check MR Pressure air leakage from both cabs. 4.2 Check BP Air leakage (isolate BP charging cock-70) Brake Test (Automatic Brake operation) 5.0 Brake Test (Automatic Brake operation) Check proportionality of Auto Brake system Clw's check sheet no. F60.812 Version 2 Auto controller position BP Pressure kg/cm2 BC (WAG-9 & WAP-7) Kg/cm2 BC (WAG-9 & WAP-7) Kg/cm2 Auto controller Result Value Result Value Result Value Result Value Result Value Result Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30	2.13	FP pressure: Fit Test Gauge in Te	est point 107F FPTP.				6.0±0.20kg/cm2	
Open for Test Check Air Dryer Towers to change. Every minute	3.0	Air Dryer Operati	ion					
3.3 Check condition of humidity indicator Blue Blue	3.1	·		• •				ok
Main Reservoir Leakage Test	3.2	Check Purge Air Sto	ps from Air Dryer at	t Compressor stops				
A.1	3.3	Check condition of humidity indicator				Blue	Blue	
leakage from both cabs.	4.0	Main Reservoir Lea	akage Test					
MM3882 & MM3946 minutes Kg/cm2 in 5 minutes	4.1			1		than 1 kg/cm2 in	in 15	
Check proportionality of Auto Brake system	4.2	Check BP Air leakag	ge (isolate BP chargii	ng cock-70)	1		_	Kg/cm2 in 5
Check proportionality of Auto Brake system	5.0	Brake Test (Auto	matic Brake opera	ation)				
Auto controller position BP Pressure kg/cm2 BC (WAG-9 & WAP-7) BC (WAP-5) Kg/cm2 Kg/cm2 Kg/cm2 Kg/cm2 Kg/cm2 Kg/cm2 Result Value Result Value Result Value Result Run 5±0.1 5.0 Kg/cm2 0.00 0.00 Kg/cm2 0.00 - Intial 4.60±0.1 4.6 Kg/cm2 0.40±0.1 0.40Kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5 Kg/cm2 5.15±0.30 - Interpretation 4.50±0.20 4.50±0	5.1							
position Kg/cm2 Kg/cm2 Value Result Value Result Run 5±0.1 5.0 Kg/cm2 0.00 0.00 Kg/cm2 0.00 Intial 4.60±0.1 4.6 Kg/cm2 0.40±0.1 0.40Kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30 -		Check proportional	ity of Auto Brake system					
Run 5±0.1 5.0 Kg/cm2 0.00 0.00 Kg/cm2 0.00 - Intial 4.60±0.1 4.6 Kg/cm2 0.40±0.1 0.40Kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30 -			BP Pressure kg/cm	n2			, ,	
Intial 4.60±0.1 4.6 Kg/cm2 0.40±0.1 0.40Kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30 -			Value	Result	Value	Result	Value	Result
Intial 4.60±0.1 4.6 kg/cm2 0.40±0.1 0.40kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 kg/cm2 2.50±0.1 2.5kg/cm2 5.15±0.30 -		Run	5±0.1	5.0 Kg/cm2	0.00	0.00 Kg/ cm2	0.00	-
Engraph		Intial	4.60±0.1	4.6 Kg/cm2	0.40±0.1		0.75±0.15	-
Emergency Less than 0.3 0.2 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30 -		Full service	3.35±0.2	3.4 Kg/cm2	2.50±0.1	2.5Kg/ cm2	5.15±0.30	-
<u> </u>		Emergency	Less than 0.3	0.2 Kg/cm2	2.50±0.1	2.5Kg/ cm2	5.15±0.30	

PLW/PATIALA

Loco No.: 42048

5.2	Record time to BP pressure drop to 3.5 kg/cm2 Ensure	D&M test spec.	8±2 sec.	9 Sec
	Automatic Brake Controller handle is Full Service from Run	MM3882 & MM3946		
5.3	Operate Asst. Driver Emergency Cock,	D&M test spec.	BP pressure falls	
		MM3882 & MM3946	to Below 2.5	OK
		0.544 1 1 1 1	kg/cm2	4.00
5.4	Check brake Pipe Pressure Switch 69F operates	CLW's check sheet no.	Closes at BP	4.30
		F60.812 Version 2	4.05- 4.35	Kg/cm2
			kg/cm2	
			Opens at BP	2.05
			2.85- 3.15	3.05
	Maria Arita Busha Cantuallan handla fuana Briania ta	DOM took once	kg/cm2	Kg/cm2
5.5	Move Auto Brake Controller handle from Running to	D&M test spec.		
	Emergency BC filling time from 0.4 kg/cm2 i.e. 95% of	MM3882 & MM3946		
	Max. BC developed		4±1 sec.	
	WAP5 – BC 5.15 ± 0.3 kg/cm2 apply time			
	WAP7 - BC 2.50 ± 0.1 kg/cm2 WAG9 - BC 2.50 ± 0.1 kg/cm2		7.5±1.5 sec. 21±3 sec.	20 Sec.
5.6	Move Auto Brake Controller handle to full service and	DOM tost spec	2113 Sec.	20 300.
5.6		D&M test spec. MM3882 & MM3946		
	BP pressure 3.5 kg/cm2. Move Brake controller to	1011013882 & 1011013946		
	Running position BC Release time to fall BC Pressure up			
	to 0.4 kg/cm2 i.e. 95% of Max. BC developed BC release Time			
	WAP7		17.5±25 sec.	
	WAG9		17.5±25 sec.	55 sec.
5.7	Move Auto Brake Controller handle to Release, Check	CLW's check sheet no.	60 to 80 Sec.	78 Sec.
5.7	•	F60.812 Version 2	60 to 80 sec.	78 Sec
г о	BP Pressure Steady at 5.5± 0.2 kg/cm2 time. Auto Brake capacity test: The capacity of the A9 valve		DD management	
5.8	in released condition must conform to certain limit in	RDSO Motive power	BP pressure should not fall	
		Directorate report no.	below 4.0	
	order to ensure compensation for air leakage in the	MP Guide No. 11 July, 1999 Rev.1	kg/cm2 with in	4.5
	train without interfering with the automatic functioning of brake.	1999 Kev.1	60 Sec.	Kg/cm2
	_		60 Sec.	Ng/CIIIZ
	* Allow The MR pressure to build up to maximum stipulated limit.			
	* Close brake pipe angle cock and charge brake pipe to			
	5 kg/cm2 by A-9 (Automatic brake controlling) at run			
	position.			
	* Couple 7.5 dia leak hole to the brake hose pipe of			
	locomotive. Open the angle cock for brake pipe.			
	The test shall be carried out with all the compressors in			
	working condition.			
5.9	Keep Auto Brake Controller (A-9) in Full Service. Press		BC comes to '0'	0
5.5	Driver End paddle Switch (PVEF)		De comes to 0	
6.0	Direct Brake (SA-9)			
6.1	Apply Direct Brake in Full Check BC pressure			
0.1	WAG9/WAP7	CLW's check sheet no.	3.5±0.20 kg/cm2	3.6
	WAP5	F60.812 Version 2	5.15±0.3 kg/cm2	Kg/cm2
6.2				_
0.2	Apply Direct Brake, Record Brake Cylinder charging	D&M test spec.	8 sec. (Max.)	8 Sec
	time	MM3882 & MM3946	1	

PLW/PATIALA

Loco No.: 42048

6.3	Check Direct Brake Pressure switch 59 (F)	D&M test spec. MM3882 & MM3946	0.2.±0.1 kg/cm2	0.25 kg/cm2	
6.4	Release direct brake & BC Release time to fall BC pressure up to 0.4 kg/cm2		10 -15 Sec.	14 Sec	
7.0	Modified System Software (only for CCB)		-NA-	-NA-	
7.1	Bail-off de-activated during emergency by any means	-			
7.2	DPWCS and Non-DPWCS mode enabled		Multi Loco		
7.3	TCAS and Non-TCAS mode enabled		Not Yet Launched	Presently	
7.4	Penalty brake application deactivated for Fault code 113 (FC 113) and CCB health signal will not drop to avoid loco detention/failure. The Brake Electronics Failure "message will not generate on DDS.	RDSO letter no.	Pressure Setting Needed is12 kg/sqcm causing mismatching with standard Pr Setting	not happening in PLW	
7.5	CCB health signal logic revised (Now will remain high) for penalty condition occurring with FC 108 due to wrong operation/not affecting operation/ Not a CCB Fault (i.e Both controllers selected as LEAD etc) The Brake electronic failure message will not generate on DDS	EL/3.2.19/3-phase (CCB), dtd 30.01.2023	-NA-	-NA-	
7.6	CCB health signal logic for FC 102 (In case of BC request from VCU is more than 90 %-above 9V DC) is changed i.e CCB health signal will not drop for FC 102 which will avoid loco detention/failure. The brake electronic failure message will not generate on DDS.		Could not performed by M/s Knorr	Presently Not happening in PLW	
7.7	Booting time for CCB with TCAS/TPM/PTWS/DPWCS mode 15-20 sec. However, in case of absence of either one or both system booting time subsequently increased to 40-50 sec.		-NA-	-NA-	
8.0	Sanding Equipment				
8.1	Check Isolating Cock-134F is in open position. Press sander paddle Switch. (To confirm EP valves Operates)		Sand on Rail	Ok	
9.0	Test Vigilance equipment : As per D&M test specification			Ok	

Signature of SSE/Shop

	42048						
	Warranty						
S.No.	Description	PL NO.	QPL /Nos.	Supplier	Sr. no.		
1	Pantograph	29880014(HR), 29880026	2	FAIVELEY, CONTRANSYS	A25-0882/JAN-2025, 15288-09/24		
2	Servo motor	29880026	2	CONTRANSYS	16322-04/25		
3	Air Intake filter Assly	29480103	2	Vikrant	3300-08/2024, 3302-08/2024		
4	Insulator Panto Mtg.	29810127	8	BHEL	12-2024, 01-2025		
		•	MIDDLE RO	OF COMPONENT			
5	High Voltage Bushing	29731021	1	ELECTRANEX	EIPL-5959-01-25		
6	Voltage Transformer	29695028	1	Pragati	24/819198-Mar/2025		
7	Vacuum Circuit Breaker	25712202	1	Schneider	227160924-04N3]	
8	Insulator Roof line	29810139	9	BHEL / MIL	09-2024 / 02-2025		
9	Harmonic Filter	29650033	1	Sure	809817 02	AS Per PO/IRS Conditions	
10	Earth Switch	29700073	1	Arihant Electricals	ES/1110/119-03/2025		
11	Surge Arrester	29750052	2	CG POWER & INDUSTRIAL	58838-2024, 58839-2024		
Air Brake Components							
12	Air Compressor (A,B)	29511008	2	ANEST	CD 0234-04-24 A, CD 0176-04-24 B		
13	Air Dryer	29162051	1	SPIN	SLD 0102-01-25		
14	Babby compressor	25513000	1	ELGI	SYLS 109797		
15	Air Brake Panel	29180016	1	FAIVELEY	DEC 24-07-WAG 9-3786		
16	Contoller (A,B)	29180016	2	FAIVELEY	H 088-02-25 A , H 103-02-25 B		
17	Breakup Valve	29180016	2	FAIVELEY			
18	Wiper Motor	29162026	4	AUTO INDUSTRY			

PLW/PTA

ELECTRIC LOCO HISTORY SHEET (ECS)

ELECTRIC LOCO NO: 42048 LIST OF ITEMS FITTED BY ECS

RLY: CR

SHED: PADX

PROPULSION SYSTEM: ALSTOM

SN	DESCRIPTION OF ITEM	ITEM PL NO.	ITEM SR. NO CAB-1/CAB-2		MAKEKUPDUED
1	LED Based Flasher Light Cab I & II	29612937	26754	26722	MAKE/SUPPLIER MATSUSHI P.TECH
2	Led Marker Light Cab I & II	29612925			SIRVEEN
3	Cab Heater Cab I & II	29170011	10461/10463/10462/10464 2735 2753		
4	Crew Fan Cab I & II	29470080	RT07170125/08510125/07870125/07980125		TOPGRIP
5	Master Controller Cab I		720		ROTO TECH
6	Master Controller Cab II	29860015	720		KEPCO
7	Complete Panel A Cab I & II	29178265	110 1453		KONTAGE
æ	Complete Panel C Cab I & II	29170539	3738	3735	KONTACT
9	Complete Panel D Cab I & II	29178265	115	1629	KEPCO/ALSTOM KONTACT
10	Complete Cubicle- F Panel Cab I & II	29178162	2788 03/25	2795 03/25	CG
11	Speed Ind.& Rec. System	29200040	M-2501522/S-2501522		AAL
12	Battery (Ni- Cd)	29680025	B-184		HBL
13	Set of Harnessed Cable Complete	29600420	D-104		POLYCAB
14	Transformer Oil Pressure Sensor (Cab-1) (Pressure Sensor Oil Circuit Transformer)	29500047	1863 Feb25	2407 Mar25	
	Transformer Oil Pressure Sensor (Cab-2)		1947 Feb24	1857 Feb25	BG INDUSTRIES
16	Transformer Oil Temperature Sensor (Cab-1) (Temperature Sensor Oil Circuit Transformer)	29500035	BG/TFP/8672 Aug-24		BG INDUSTRIES
	Transformer Oil Temperature Sensor (Cab-2)	20000033	BG/TFP/8991 Aug-24		
	Roof mounted Air Conditioner I		SSM/CLW/AC/05-25/178		SSM
19	Roof mounted Air Conditioner II	29811028	SSM/CLW/AC/05-25/179		
20	DPWCS (DDU)		1461 1462		LOTUS

SSE/JE/Roof &U/F

SSE/JE/Machine Room

SSE/JE/TEST ROOM

SSE/JE/Harness

			MOTIVE WORKS, PAT			
			0- 42048/CR/PADX			
S.No.	Equipment	PL No.		ent Serial No.	Make	
1	Complete Shell Assembly with piping	29171027	Sr. 17/1	.71, 06/2025	CHANDRA UDYOG	
2	Side Buffer Assly Both Side Cab I	29130050	22, 02/25	NA, 02/25	AEU	AEU
3	Side Buffer Assly Both Side Cab II	23130030	40, 03/25	11, 03/25	AEU	AEU
4	CBC Cab I & II	29130037	J 72, 10/24	K 61, 11/24	RIL	RIL
5	Hand Brake		186	539-4/25	Mechwe	I SSI UNIT
6	Set of Secondry Helical Spring	29045034 29041041			FROI	NTIER [®]
7	Battery Boxes (both side)	29680013	160, 03/25	165, 03/25	BHARTIA BRIGHT	BHARTIA BRIGHT
8	Traction Bar Bogie I		892	3, 04/25	K	M
9	Traction Bar Bogie II			9, 04/25		M
10	Centre Pivot Housing in Shell Bogie I side			8, 02/25	E	ve
11	Centre Pivot Housing in Shell Bogie II side	29100057		0, 02/25	e	ve
12	Elastic Ring in Front in Shell Bogie I side			6, 01/25	Av	adh
13	Elastic Ring in Front in Shell Bogie II side	29100010		1, 01/25	Av	adh ·
14	Main Transformer	29731008 for WAG 9 29731057 for WAP-7		BHL11500/73, 2025	C	CG CG
15	Oil Cooling Radiator I		03/25.1	P0325RC2798	FINE AUT	OMOTIVE
16	Oil Cooling Radiator II	29470031		P0325RC2790	FINE AUTOMOTIVE	
17	Main Compressor I with Motor			176, 04/24	anest iwata	
18	Main Compressor II with Motor	29511008		234, 04/24	anest iwata	
	·				FLOWOIL	
19	Transformer Oil Cooling Pump I		2412DC4070, 2024		FLOWOIL	
20	Transformer Oil Cooling Pump II			C4120, 2024		
21	Oil Cooling Blower OCB I	29470043		3010 LHP1001643895		STEEL
22	Oil Cooling Blower OCB II		01/25, PDS-2501008 LHP1001608295		PD S	STEEL
23	TM Blower I	29440075	03/25,24P7510/05,24P7510AF05		SA	INI
24	TM Blower II	23440073	03/25,24P751	LO/08,24P7510AF08	SAINI	
25	Machine Room Blower I	29440105	D42-6191	MF 42/D 6238	SAMAL	
26	Machine Room Blower II	29440103	03/25, D42-6	5186, MF42/D6233	SAMAL	
27	Machine Room Scavenging Blower I		04/25,D25-	7224CF25/D7620	SAMAL	
28	Machine Room Scavenging Blower II	29440129	04/25,D25-	7229, CF25/D7625	SA	MAL
29	TM Scavenging Blower Motor I		05/25, 25P13	15/20,25P1315AF20	SA	AINI
30	TM Scavenging Blower Motor II	29440117	05/25, 25P13	15/10,25P1315AF10	SA	AINI .
31	Traction Convertor I		2024, A T I L/11/202	4/54/PROPULSION-A/4227		
32	Traction Convertor II		2024, A T I L/11/202	4/54/PROPULSION-A/4228		
33	Vehicle Control Unit I	20741075	2024, A T I L/11/202	4/54/PROPULSION-A/4227	AIS	том
34	Vehicle Control Unit II	29741075	2024, A T I L/11/202	4/54/PROPULSION-A/4228		TOW
35	Aux. Converter Box I (BUR 1)			B/10257/12A/1267		
36	Aux. Converter Box 2 (BUR 2 + 3)			B/10257/12B/1267		
37	Axillary Control Cubical HB-1	29171180		4, 0191181	-	NENTAL
38	Axillary Control Cubical HB-2	29171192		2/2024/22/HB2G9/117		METERS
39	Complete Control Cubicle SB-1	29171209	01/25, CG/SB-1/25010937			DIEX CN
40	Complete Control Cubicle SB-2	29171210	01/25	5, 25011819	HJAND R	ECTIFIERS TOOLS
41	Filter Cubical (FB) (COMPLETE FILTER CUBICLES)	29480140	08/24, FB/2025/D/0274/666		HIHS	
42	Driver Seats	29171131	4/25- 18	0, 175, 230, 228 `	TAR	UDEEP
43	Transformer oil steel pipes	29230044	RAN	SAL PIPES		
44	Conservator Tank Breather	29731057	25-07	32 , 25-0727	YC	GYA
45	Ballast Assembly (only for WAG-9)	29170163	54,0	96,082,76	А	KM
46	Head Light		25030012	25, 2503001251	. A	LAN

NAME SHURMAN SHAPM SSE/LAS

NAME AULIT OPPAC JE/LAS/UF Rawl NAME Rawindra Mee JE/LAS

Issue No.: 05 Effective Date: July-2023

DOC NO: F/LAS/Electric Loco CHECK SHEET (Ref: WI/LAS/Elect/01, 02, 03 & 04 & QPL/LAS/Elect. Loco)

Page 1 of 1

पटियाला रेलइंजन कारखाना, पटियाला PATIALA LOCOMOTIVE WORKS, PATIALA **ELECTRIC LOCO CHECK SHEET**

LOCO NO: 42048

Rly: CR

Shed: PADX

S. No.	ITEM TO BE CHECKED	Specified Value				
1.1	Check proper Fitment of Hotel Load Converter & its output contactor.	OK	1	AIL		
1.2	Check proper Fitment of MR Blower 1 & 2, MR Scavenging Blower 1 & 2, TM Blower 1 & 2, TMB Scavenging Blower 1 & 2. TM scavenging blower 1 & 2 & Oil Cooling unit.	OK		المراكب المراك		
1.3	Check proper of Fitment of oil cooling unit (OCU).	OK		OK		
1.4	Check proper Fitment of HB 1 & 2 and its respected lower part on its position.	OK		OK		
1.5	Check proper Fitment of FB panel on its position.	OK		OK		
1.6	Check proper Fitment of assembled SB1 & SB2 panel.	OK		OK		
1.7	Check proper Fitment of Auxiliary converter 1, 2 & 3-(BUR-1, 2 & 3).	OK		OK		
1.8	Check proper Fitment of Traction converter 1 & 2 (SR-1 & 2).	OK		OK		
1.9	Check proper fitment, torquing & Locking of Main Transformer bolt.	OK		OK		
1.10	Check proper fitment of Main compressor both side with the compressor safety wire rope.	OK		OK		
1.11	Check proper resting of Secondary Helical Springs between Bogie & Shell body.	OK		OK		
1.12	Check proper fitment of Bogie Body Safety Chains.	OK		ok		
1.13	Check proper fitment of Cow catcher.	· OK		OK		
1.14	Check coolant level in SR 1 & 2 Expansion Tank.	OK	OK			
1.15	Check Transformer Oil Level in both conservators Tank (Breather Tank).	OK	oK			
1.16	Check proper fitment and maintain required gaps from Loco Shell Body of all metallic pipes to avoid any damage during online working of Locomotives.	OK	0/4			
1.17	Check proper fitment of both battery box.	OK	· OK			
1.18	Check for any gap between Main Transformer mounting base & Loco Shell.	OK	OK			
1.19	Check proper fitment of Push Pull rod its bolt torquing and fitment of fixing cable. As per Drg No 1209-01-113-001	OK		014		
1.20	Secondary Vertical and Lateral Clearance on leveled track at the time of Loco Dispatch. <u>ELRS/TC/ 0082 (Rev 1) dated 17.09.2015</u>	Vertical-Std :35-60 mm Lateral Std- 45-50 mm	50	ALP L 51 4	1 52	
1.21	Buffer height: Range (1090, +15,-5)	1085-1105		L/S	R/S	
	Drg No IB031-02002.	mm	FRONT	1093	100	
			REAR	1093	1092	
1.22	Buffer Length: Range (641 mm + 3 to 10 mm with buffer face)	641 mm		L/S	R/S	
	Drg No-SK.DL-3430.		FRONT	645	645	
			REAR	646	644	
1.23	Height of Rail Guard. (114 mm + 5 mm,-12 mm).	114 mm + 5		L/S	R/S	
1.20	As per RDSO Pamphlet Important Bogie Clearances of Electric Locomotives.	mm,-12 mm	FDCUIT			
		, , ,	FRONT	114	113	
4 24	CDC Height: Dance (4000, 145, 5)	1000 : 17		115	115	
1.24	CBC Height: Range (1090; +15,-5) Drg No- IB031-02002.	1090, +15 -5 mm	FRONT: REAR:	1100		

(Signature of SSE/Elect. Loco)

NAME SHUBBAM GRAPA

DATE 26.06.2025

(Signature of /JE/Elect Loco)

NAME Raying Macong

DATE 26/06/25

(Signature of JE/UF)

NAME ANUT UPPAL

DATE 26/06/25

Loco No. 42048

1. BOGIE FRAME:

BOGIE	FRAME NO	Make	PL No.	PO No. & dt.	Warranty Period
FRONT	SL-887	FRONTIER	29100677	101678	As per PO/IRS
REAR	SL-886	FRONTIER	29100677	101678	conditions

2. Hydraulic Dampers (PL No.29040012) Make: KNORR / KNORR

3. AXLES:

AXLE POSITION NO	1	2	3	4	5	6
MAKE/	PLW	PLW	PLW	PLW	PLW	PLW
S.NO	28658	28746	28659	28650	28716	28945
Ultrasonic Testing	OK	OK	OK	OK	OK	OK

4. WHEEL DISCS NO. AND TYPE & BULL GEAR

AXLE POSITION NO	1	2	3	4	5	6
GEAR END	EQD0-002	EV68-058	EQ92-084	EV56-069	EV70-042	EV61-045
Make	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED
FREE END	EV77-053	EV56-071	EV64-064	EV70-065	EV44-066	EQA6-085
Make	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED
Bull Gear No.	25-C-1612	25-B-17193	25-B-9183	25-C-12142	24-H-15198	25-C-1611
Bull Gear Make	KPCL	KPCL	KPCL	KPCL	KPCL	KPCL

5. AXLE ROLLER BEARING (CRU) (PL No. 29010020, Warranty: As per PO/IRS conditions)

AXLE POSITION NO		1	2	3	4	5	6
Gear	MAKE	FAG	FAG	FAG	NBC	FAG	FAG
End	PO NO. & dt	02312	02312	02312	02311	02312	02312
Free	MAKE	FAG	FAG	FAG	NBC	FAG	FAG
End	PO NO. & dt	02312	02312	02312	02311	02312	02312

6. WHEEL DISC PRESSING PRESSURE IN KN: (SPECIFIED 80-105 T)

AXLE POSITION NO	1	2	3	4	5	6
BULL GEAR END	102 T	90 T	924 KN	969 KN	899 KN	80 T
FREE END	100 T	94 T	937 KN	930KN	818 KN	96 T

Loco No. 42048

7. DIAMETER AFTER PROFILE TURNING: SPECIFIED 1092 + .5 mm - 0 mm

AXLE POSITION NO	1	2	3	4	5	6
DIA IN mm GE	1092.5	1092.5	1092.5	1092.4	1092.5	1092.5
DIA IN mm FE	1092.5	1092.5	1092.5	1092.4	1092.5	1092.5
WHEEL PROFILE GAUGE (1596±0.5mm)	OK	OK	OK	OK	OK	OK

8. SUSPENSION TUBE & ITS TAPER ROLLER BEARING:

AXLE POSITION	NO	1	2	3	4	5	6
S.T. PL 29100288	MAKE	IN	IN	IN	IN	IN	IN
GE Brg. PL 29030110	MAKE	FAG	FAG	FAG	FAG	FAG	FAG
FE Brg. PL 29030110	MAKE	FAG	FAG	FAG	FAG	FAG	FAG

9. GEAR CASE (PL No. 29030018) & BACKLASH:

AXLE POSITION NO	1	2	3	4	5	6
MAKE	KPE	KPE	KPE	KPE	KPE	KPE
BACKLASH (0.254 – 0.458mm)	0.300	0.330	0.300	0.350	0.340	0.390

10 A/BOX TO BOGIE FRAME LATERAL CLEARANCES (SPECIFIED 15.0 to 19.0mm):

AXLE POSITION NO	1	2	3	4	5	6
RIGHT SIDE	17.45	16.73	18.04	17.93	18.43	15.66
LEFT SIDE	15.67	18.34	16.13	16.41	15.85	15.48


11. TRACTION MOTOR: (PL No.29940606, Warranty: As per PO/IRS conditions)

AXLE POSITION NO	MAKE	PO No. & Date	S. NO.	
1	CGP	102027	2242001-8260	
2	TMS		PLW-3472	
3	SAINI	102034	210892411	
4	DAULAT RAM	102242	DR4106/25C-0218	
5	DAULAT RAM	102242	DR4106/25C-0226	
6	DAULAT RAM	102242	DR4806/25C-0227	

JE/SSE/ Bogie Shop

UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop: BS PLW Type of Axle/wheel: WAG9 Axle/wheel No:28658 Operator Name/Code: RAMVEER MEENA Defect Location: GE Test Results (Pass/Fail/other): If other, then Remarks	Date and TimeDt:28/5/2025 Tm:11:15	
Type of Axle/wheel: WAG9 Axle/wheel No:28658 Operator Name/Code : RAMVEER MEENA Defect Location: GE Test Results (Pass/Fail/other):	UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Operator Name/Code : RAMVEER MEENA Defect Location	Railway/Workshop: BS PLW	
Defect Location: GE Test Results (Pass/Fail/other):	Type of Axle/wheel: WAG9	Axle/wheel No:28658
Defect Location: GE Test Results (Pass/Fail/other):	Operator Name/Code : RAMVEER MEENA	
If other, then Remarks	Test Results (Pass/Fail/other):	
	If other, then Remarks	

(A-Scan)

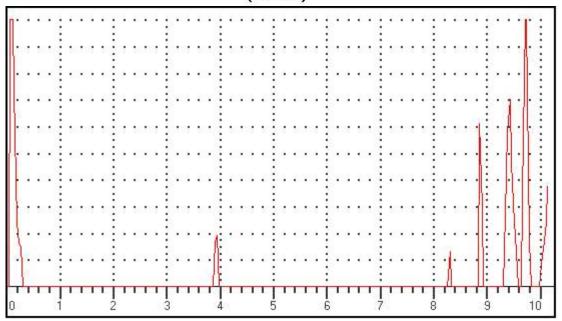

Gain: 37.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Observation/Remarks (If Any):


Data Setup

Frame No: ASC121 *

Date and TimeDt:28/5/2025 Tm:11:15	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28658
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC122 *

(A-Scan)

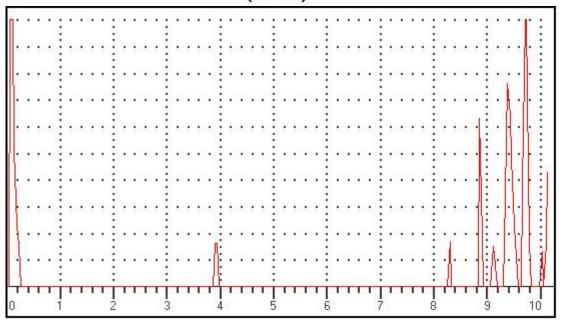

Data Setup Gain: 37.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:28/5/2025 Tm:11:15

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW


Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code: RAMVEER MEENA

Defect Location: GE

Frame No: ASC123 *

(A-Scan)

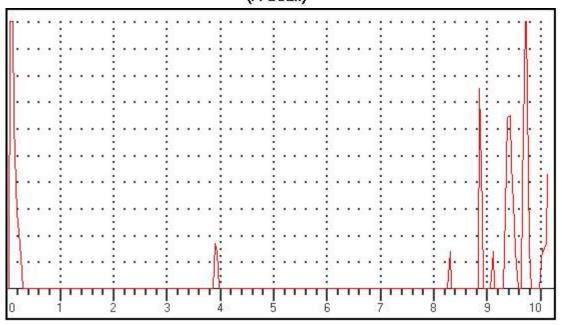

Data Setup

Gain: 37.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm


THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:28/5/2025 Tm:11:16	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28658
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

(A-Scan)

·_____

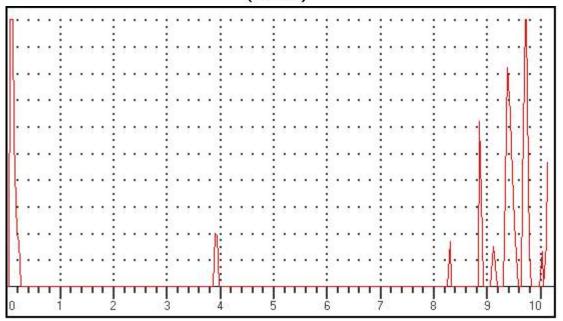

Data Setup Gain: 37.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Observation/Remarks (If Any):

Frame No: ASC124 *

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC125 *

(A-Scan)

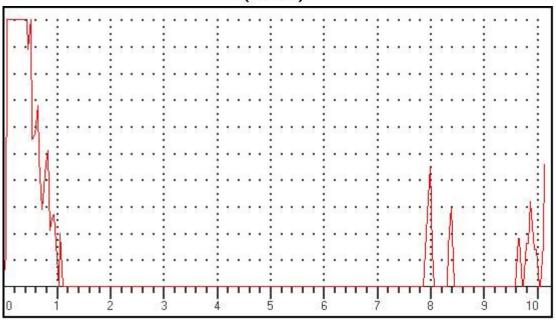

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:16 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC126 *

(A-Scan)

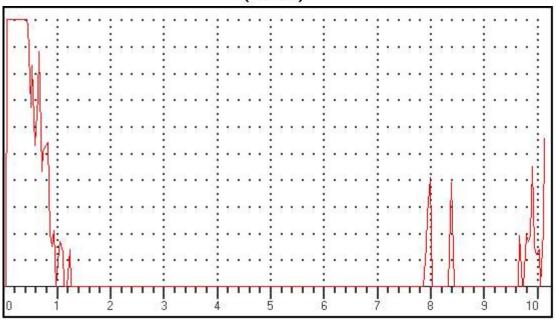

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm

Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:16 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658 Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC127 *

(A-Scan)

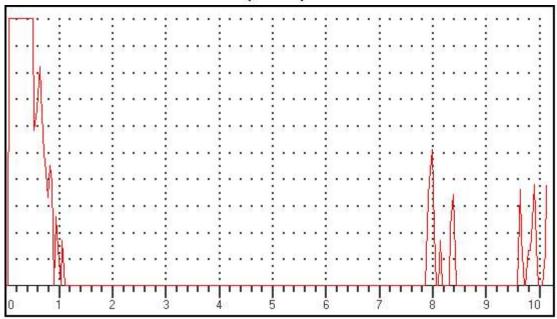

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:17
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC128 *

(A-Scan)

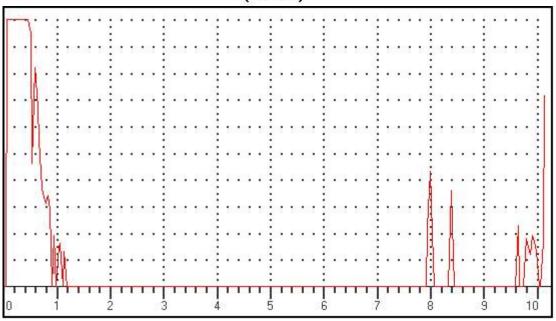

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:17 UFD Model: <u>Arya 1(R)</u> Sr No<u>:AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC129 *

(A-Scan)

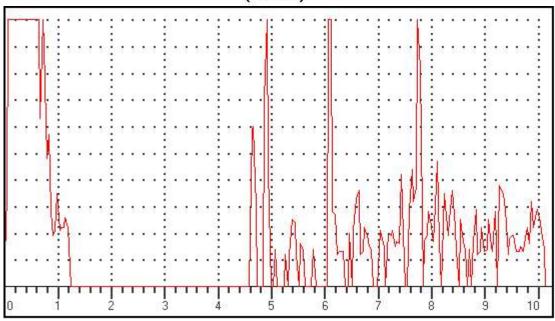

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:17
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC130 *

(A-Scan)

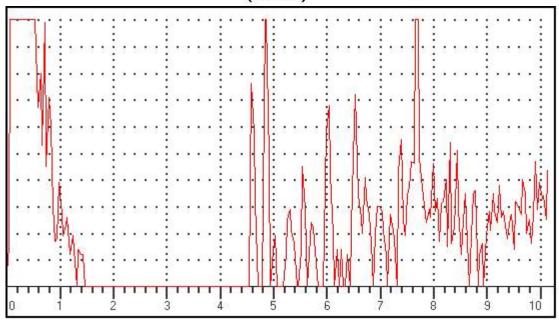

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:18 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC131 *

(A-Scan)

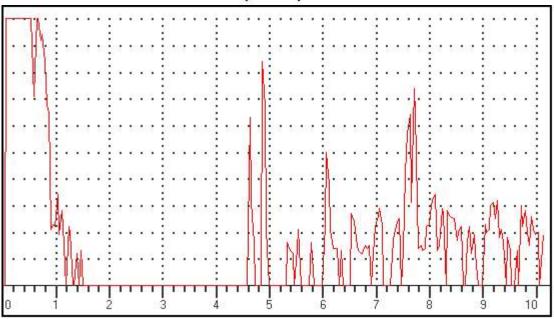

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:18
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC132 *

(A-Scan)

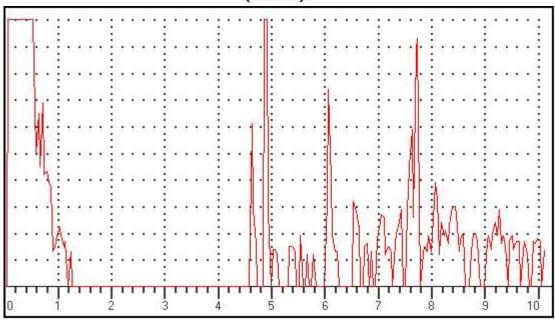

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:24
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC133 *

(A-Scan)

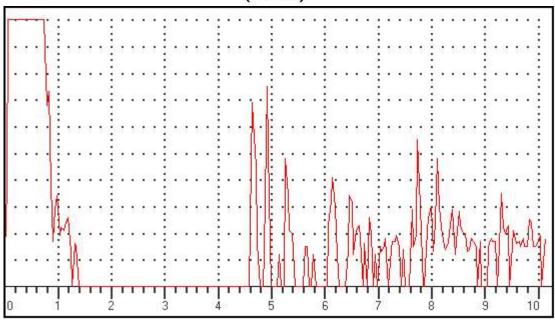

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:24
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC134 *

(A-Scan)

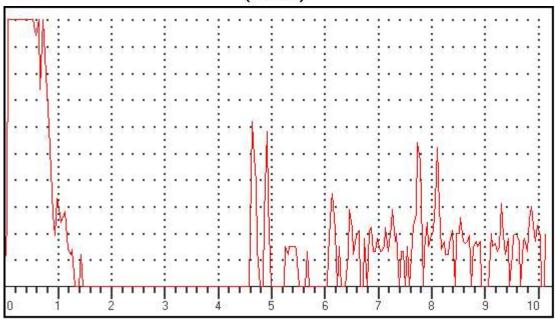

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:24 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC135 *

(A-Scan)

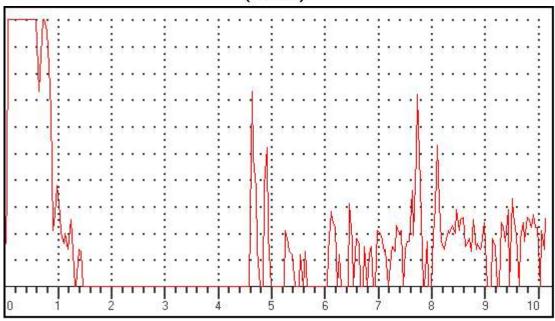

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:28/5/2025 Tm:11:25 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC136 *

(A-Scan)

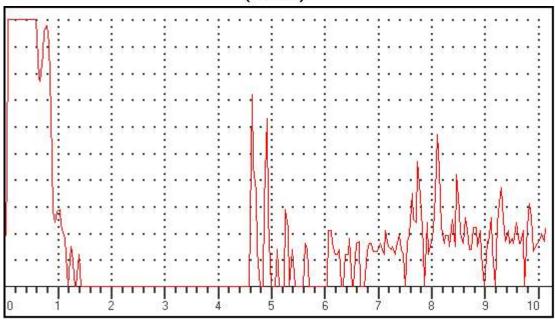

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:28/5/2025 Tm:11:25	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28658
Operator Name/Code : RAMVEER MEENA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC137 *	

(A-Scan)

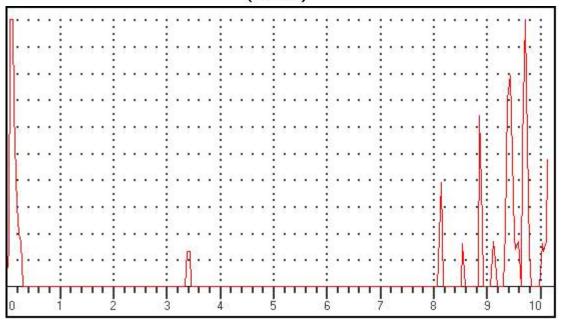

Data Setup
Gain: 38.0 dB
Gate 1 (Status): OFF
RANGE: 2500.00mm
Gate 2 (Status): OFF
MTL VEL: 5920 M/S
GEJECT: 12 %
Gate 1(Beam Path): 0.00mm
DELAY: 0.06mm
PROBE ZERO: 8.78us
Gate 1(Depth): 0.00mm
Gate 2(Echo height): 0.00mm
Gate 2(Echo height): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm
THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:28/5/2025 Tm:11:25

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28658


Operator Name/Code: RAMVEER MEENA

Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks......Frame No: ASC138 *


....

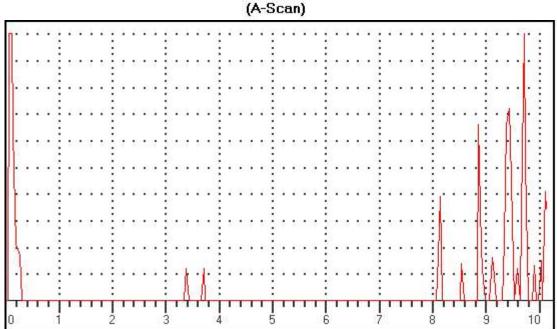

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:28/5/2025 Tm:11:25	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28658
Operator Name/Code : RAMVEER MEENA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

(A-Scan)

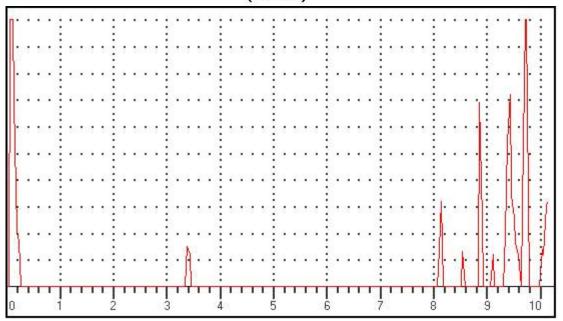

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Observation/Remarks (If Any):

Frame No: ASC139 *

Date and TimeDt:28/5/2025 Tm:11:25	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28658
Operator Name/Code : RAMVEER MEENA	
Defect Location FE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC140 *	

(A-Scan)

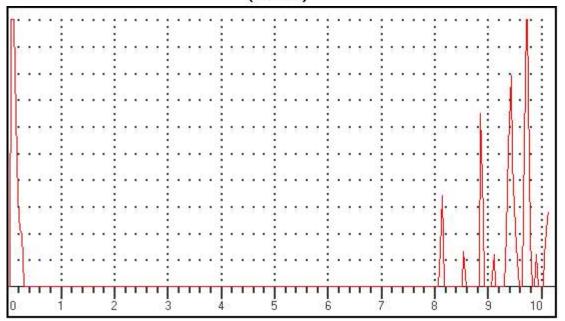

 Data Setup

 Gain: 38.0 dB
 Gate 1 (Status): OFF

 RANGE: 2500.00mm
 Gate 2 (Status): OFF

 MTL VEL: 5920 M/S
 Gate 1(Echo height): 0 %

 REJECT: 12 %
 Gate 1(Beam Path): 0.00mm

 DELAY: 0.06mm
 Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us

Gate 1(Depth): 0.00mm

MODE: SINGLE

Gate 2(Echo height):

PROBE ANGLE: 0.0DEG

Gate 2(Beam Path): mm


THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC181 *

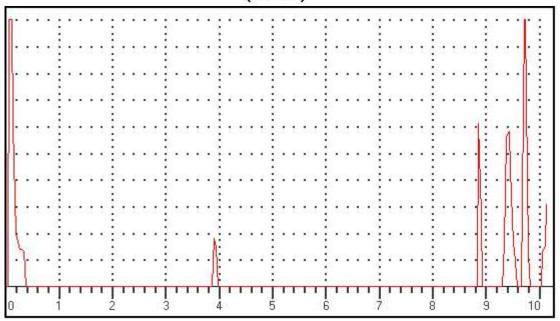

 Data Setup

 Gain: 36.0 dB
 Gate 1 (Status): OFF

 RANGE: 2500.00mm
 Gate 2 (Status): OFF

 MTL VEL: 5920 M/S
 Gate 1(Echo height): 0 %

 REJECT: 12 %
 Gate 1(Beam Path): 0.00mm

 DELAY: 0.06mm
 Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us

Gate 1(Depth): 0.00mm

MODE: SINGLE

PROBE ANGLE: 0.0DEG

Gate 2(Beam Path): mm


THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:26/5/2025 Tm:12:33	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28746
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC182 *	

(A-Scan)

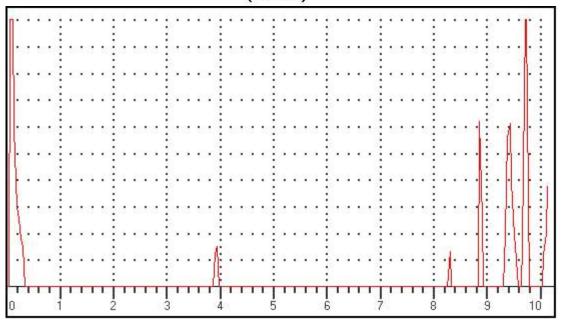

Data Setup
Gain: 38.0 dB Gate 1 (Status): OFF
RANGE: 2500.00mm Gate 2 (Status): OFF
MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm
DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm
PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm
MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm


THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:26/5/2025 Tm:12:34	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28746
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC183 *

(A-Scan)

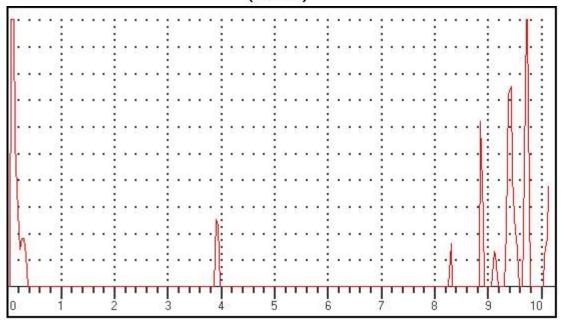


Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:26/5/2025 Tm:12:34	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28746
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC184 *	

(A-Scan)

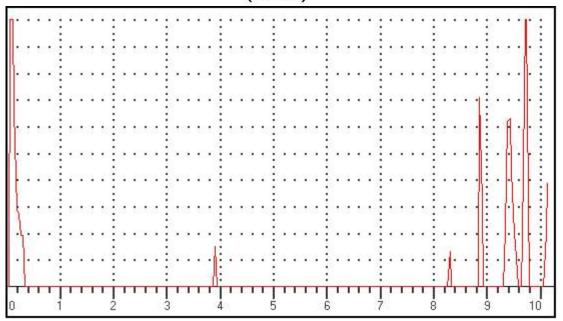

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:26/5/2025 Tm:12:34 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:28746 Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC185 *

(A-Scan)

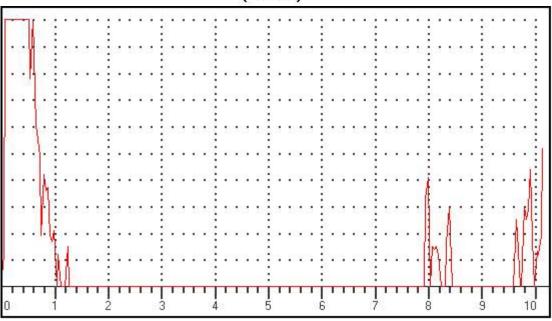

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:26/5/2025 Tm:12:35 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC186 *

(A-Scan)

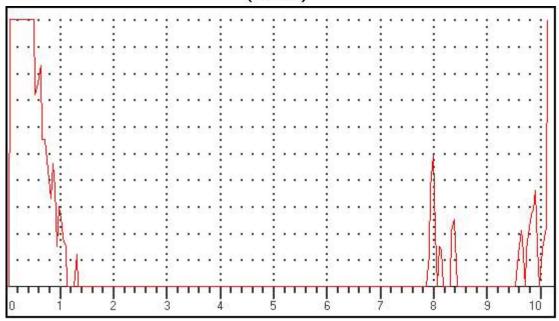

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:26/5/2025 Tm:12:35

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code: RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC187 *

(A-Scan)

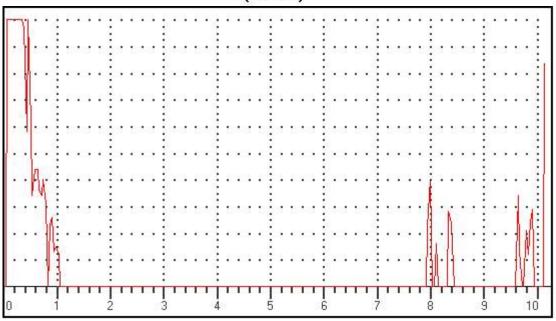

Data Setup

Gain: 45.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Operator Name/Code : RAMVEER MEENA

Defect Location : GE


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC188 *

(A-Scan)

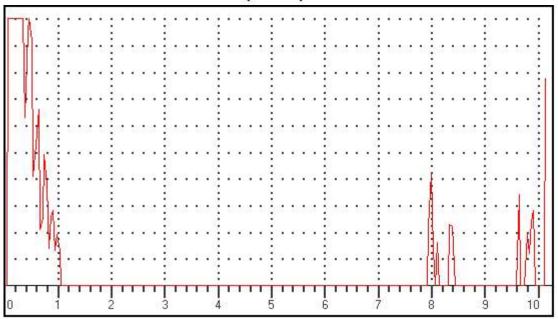

Data Setup

Gain: 45.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Surface Distance): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:26/5/2025 Tm:12:36

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code: RAMVEER MEENA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC189 *

(A-Scan)

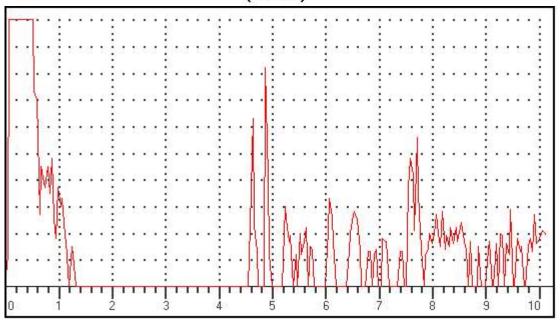

Data Setup

Gain: 47.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

CAT: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:26/5/2025 Tm:12:36 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC190 *

(A-Scan)

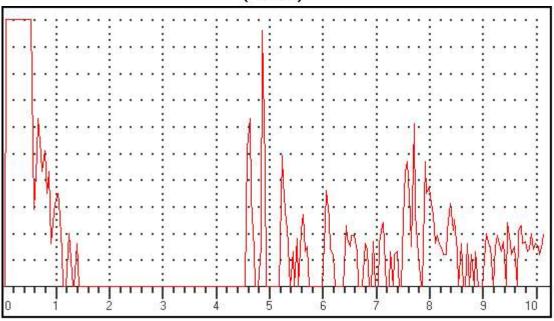

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:26/5/2025 Tm:12:36
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop.....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC191 *

(A-Scan)

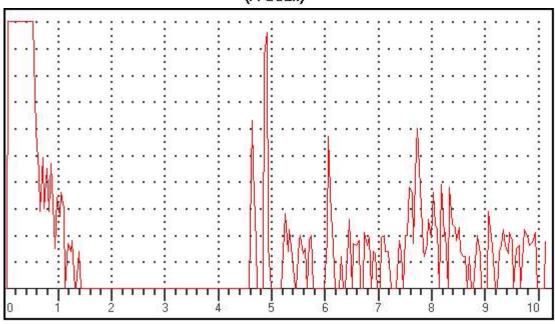

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.....:Dt:26/5/2025 Tm:12:36 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC192 *

(A-Scan)

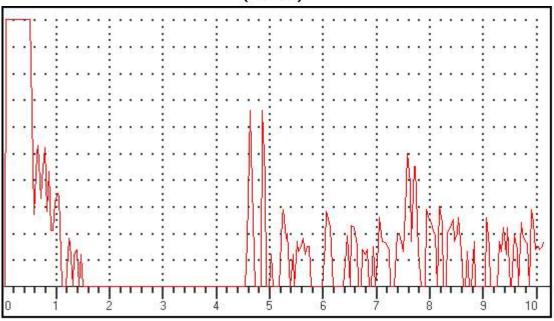

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:26/5/2025 Tm:12:40
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop.....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC193 *

(A-Scan)

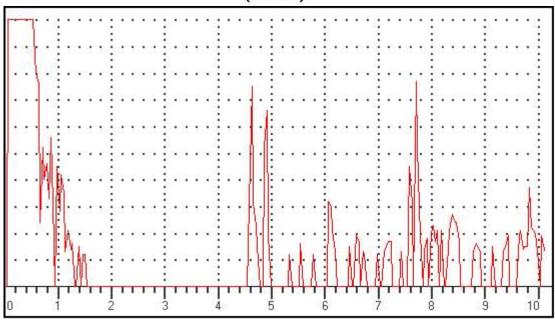

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:26/5/2025 Tm:12:40 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC194 *

(A-Scan)

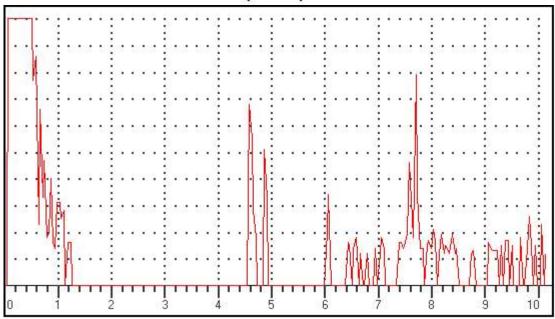

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:26/5/2025 Tm:12:40
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC195 *

(A-Scan)

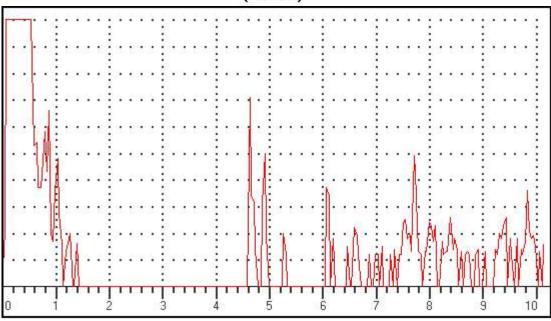

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:26/5/2025 Tm:12:41
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop.....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:28746

Operator Name/Code : RAMVEER MEENA


Defect LocationFE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC196 *

(A-Scan)

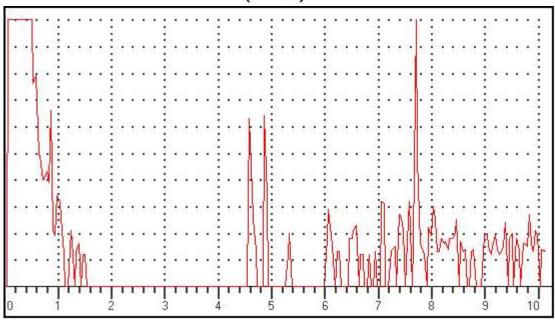

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC197 *

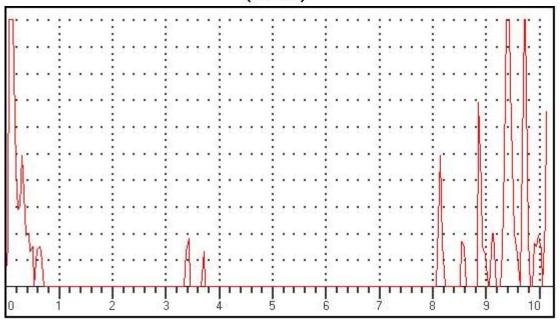

Data Setup
Gain: 42.0 dB Gate 1 (Status): OFF
RANGE: 2500.00mm Gate 2 (Status): OFF
MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm
DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm
PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm
MODE: SINGLE Gate 2(Echo height):


PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC198 *

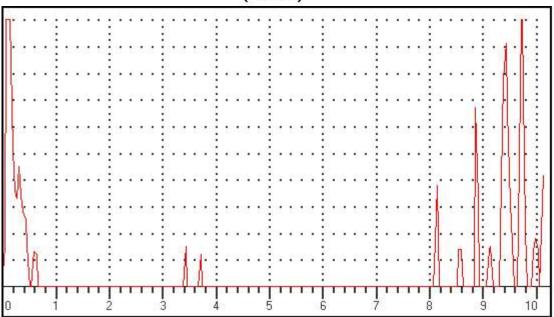

Gain: 42.0 dB
RANGE: 2500.00mm
MTL VEL: 5920 M/S
REJECT: 12 %
DELAY: 0.06mm
PROBE ZERO: 8.78us

Data Setup

PROBE ANGLE: 0.0DEG

MODE: SINGLE

Gate 1 (Status): OFF
Gate 2 (Status): OFF
Gate 1(Echo height): 0 %

Gate 1(Echo height): 0 %
Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Date and Time:Dt:26/5/2025 Tm:12:41	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28746
Operator Name/Code : RAMVEER MEENA	
Defect LocationFE	
Test Results (Pass/Fail/other):	

If other, then Remarks.....

Frame No: ASC199 *

(A-Scan)

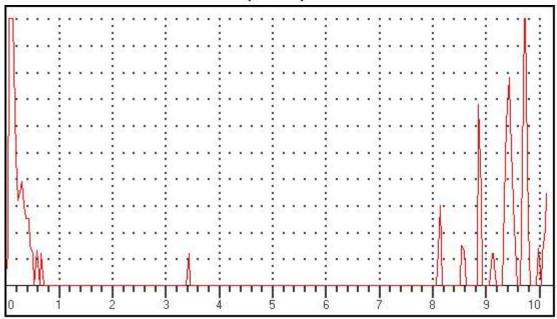

Data Setup
Gain: 42.0 dB
RANGE: 2500.00mm
MTL VEL: 5920 M/S
REJECT: 12 %
DELAY: 0.06mm

PROBE ZERO: 8.78us MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF Gate 2 (Status): OFF

Gate 1(Echo height): 0 % Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm


Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC200 *

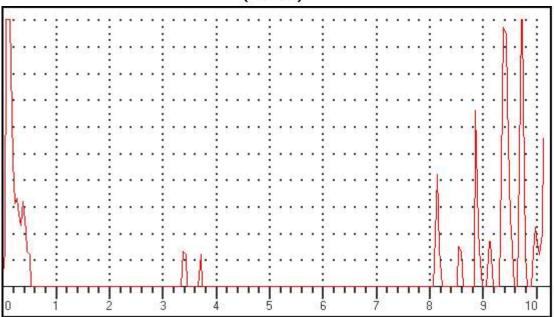

Data Setup
Gain: 42.0 dB
RANGE: 2500.00mm
MTL VEL: 5920 M/S
REJECT: 12 %
DELAY: 0.06mm
PROBE ZERO: 8.78us
MODE: SINGLE

PROBE ANGLE: 0.0DEG

Gate 1 (Status): OFF
Gate 2 (Status): OFF
Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:31/5/2025 Tm:10:9

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28659


Operator Name/Code : CK MISHRA

Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks......Frame No: ASC41 *

(A-Scan)

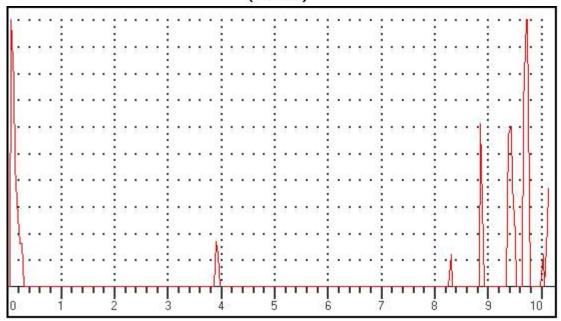

Data Setup Gain: 36.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:31/5/2025 Tm:10:9	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28659
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

(A-Scan)

.....

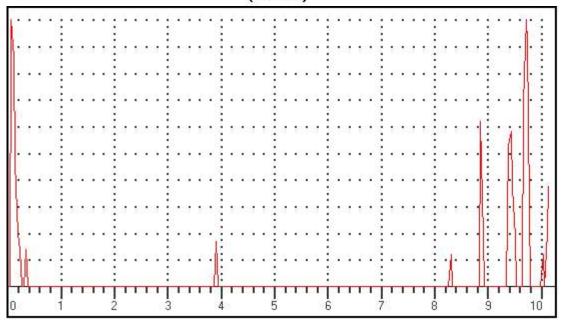

Data Setup Gain: 36.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Observation/Remarks (If Any):

Frame No: ASC42 *

(A-Scan)

Frame No: ASC43 *

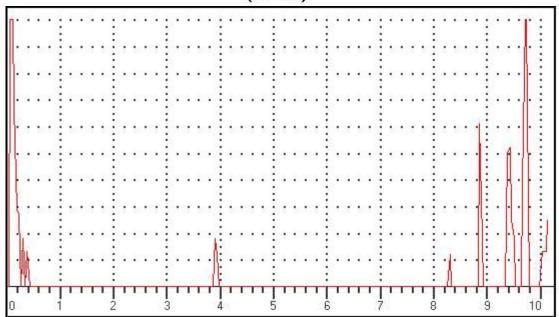

Gain: 38.0 dB
RANGE: 2500.00mm
MTL VEL: 5920 M/S
REJECT: 12 %
DELAY: 0.06mm
PROBE ZERO: 8.78us

Data Setup

PROBE ANGLE: 0.0DEG

MODE: SINGLE

Gate 1 (Status): OFF Gate 2 (Status): OFF

Gate 1(Echo height): 0 % Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:31/5/2025 Tm:10:10	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28659
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail <u>/other):</u>	
lf other, then Remarks	

(A-Scan)

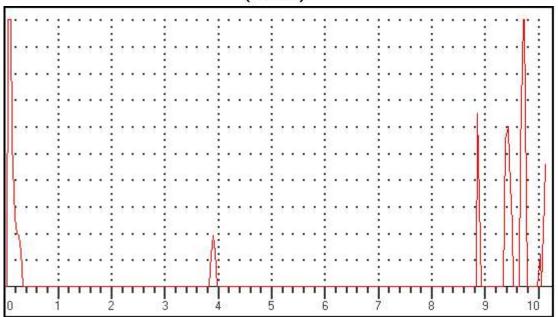

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Observation/Remarks (If Any):

Frame No: ASC44 *

Date and Time.......:Dt:31/5/2025 Tm:10:11
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC45 *

(A-Scan)

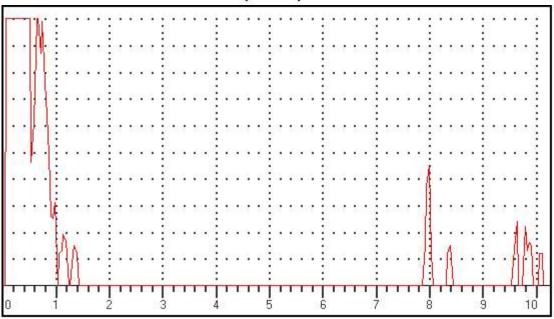

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:31/5/2025 Tm:10:11
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC46 *

(A-Scan)

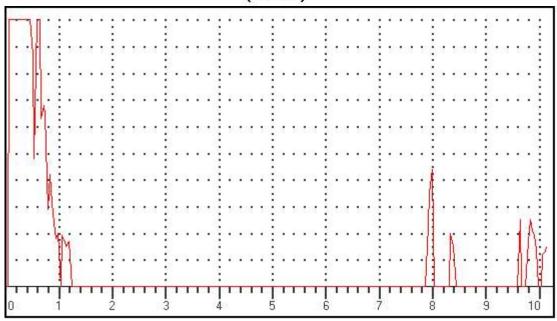

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:10:12 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC47 *

(A-Scan)

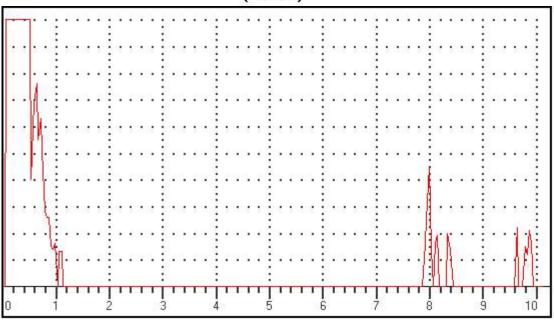

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:31/5/2025 Tm:10:13
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC48 *

(A-Scan)

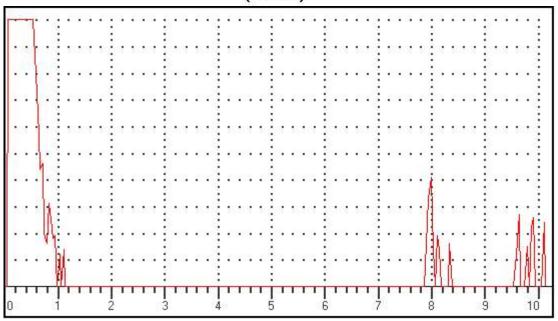

Data Setup

Gain: 47.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:31/5/2025 Tm:10:14
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC49 *

(A-Scan)

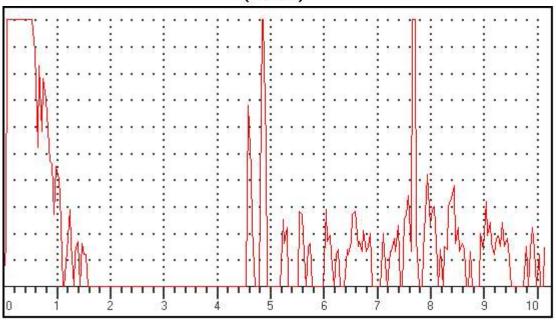

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:31/5/2025 Tm:10:14
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC50 *

(A-Scan)

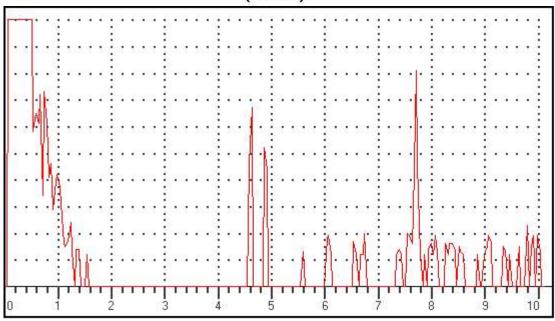

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:10:14 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC51 *

(A-Scan)

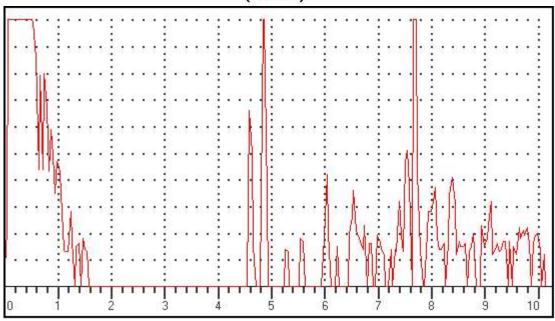

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:31/5/2025 Tm:10:14
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC52 *

(A-Scan)

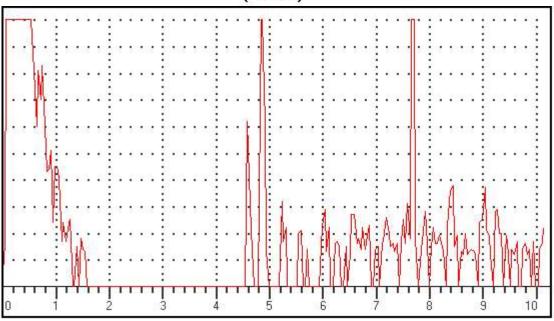

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:10:23 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC53 *

(A-Scan)

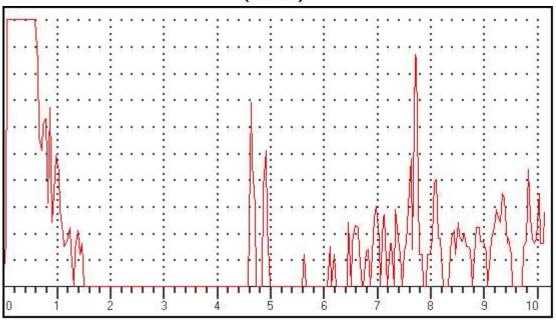

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:31/5/2025 Tm:10:24 UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC54 *

(A-Scan)

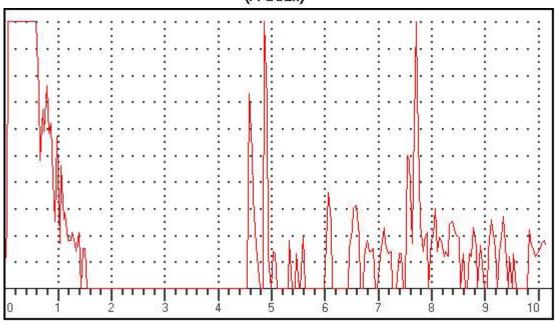

Data Setup

Gain: 50.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:10:24 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC55 *

(A-Scan)

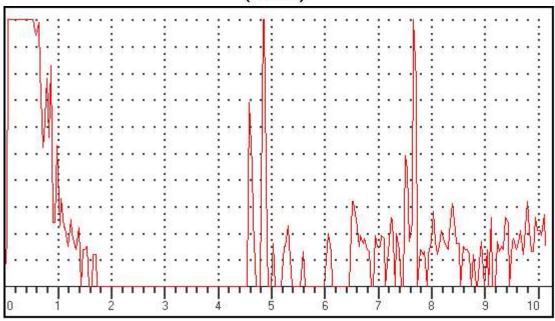

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:10:24 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC56 *

(A-Scan)

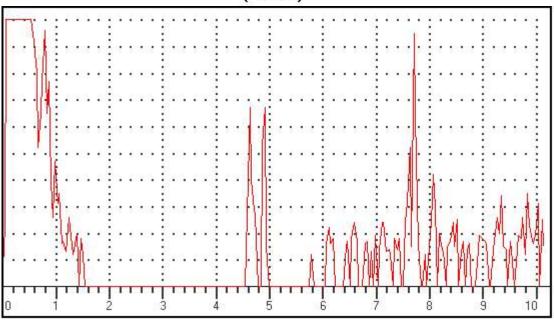

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm


Date and TimeDt:31/5/2025 Tm:10:25	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28659
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC57 *

Observation/Remarks (If Any):

(A-Scan)

.....

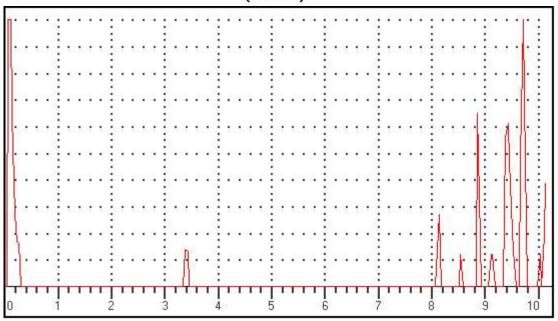

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:31/5/2025 Tm:10:26

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28659


Operator Name/Code : CK MISHRA

Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....Frame No: ASC58 *

(A-Scan)

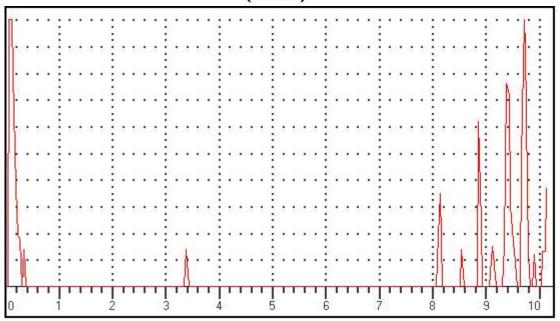

Data <mark>Setup</mark> Gain: 40.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:31/5/2025 Tm:10:26

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28659


Operator Name/Code: CK MISHRA

Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks......Frame No: ASC59 *

(A-Scan)

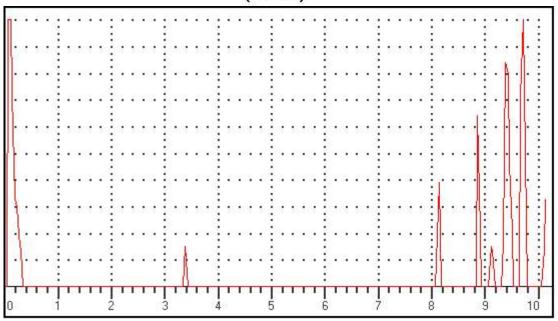

Data Setup Gain: 40.0 dB RANGE: 2500.00mm

MTL VEL: 5920 M/S REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:31/5/2025 Tm:10:26

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28659


Operator Name/Code : CK MISHRA

Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....Frame No: ASC60 *

(A-Scan)

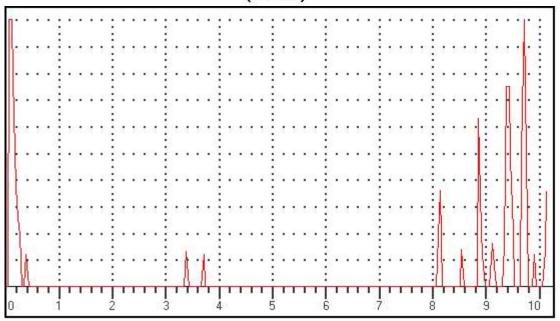

Data Setup Gain: 40.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us MODE: SINGLE

DDORE ANGLE: 0

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time........:Dt:3/6/2025 Tm:11:31

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code: CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC61 *

(A-Scan)

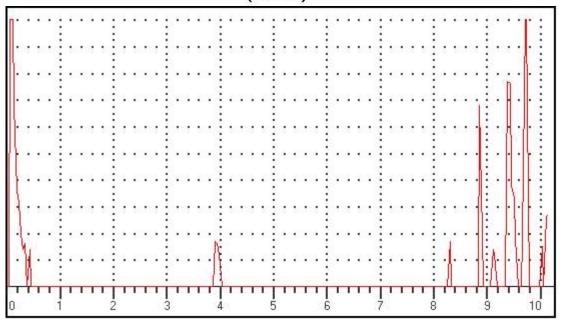

Data Setup Gain: 40.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8,78us MODE: SINGLE

MIODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:11:31

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC62 *

(A-Scan)

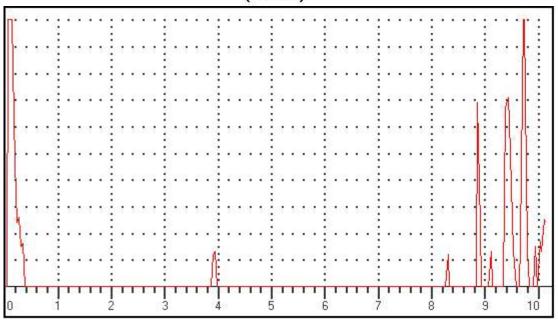

Data Setup Gain: 40.0 dB RANGE: 2500.00mm

MTL VEL: 5920 M/S REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Date and TimeDt:3/6/2025 Tm:11:31	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28650
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC63 *

Observation/Remarks (If Any):

(A-Scan)

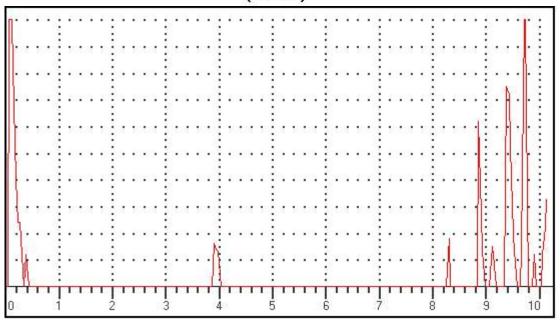


Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:3/6/2025 Tm:11:31	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28650
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC64 *

(A-Scan)

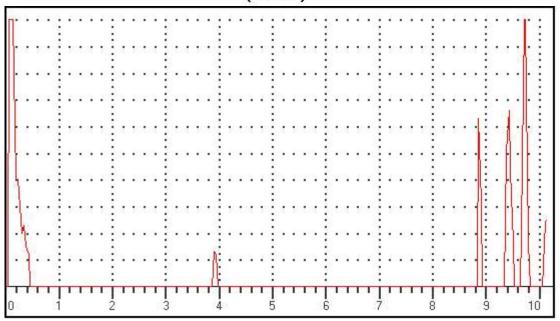

Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:11:33 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC65 *

(A-Scan)

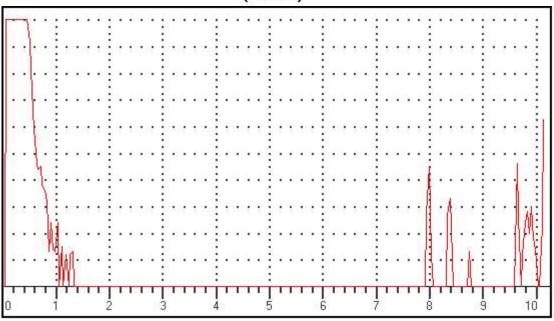

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:3/6/2025 Tm:11:33 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650 Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC66 *

(A-Scan)

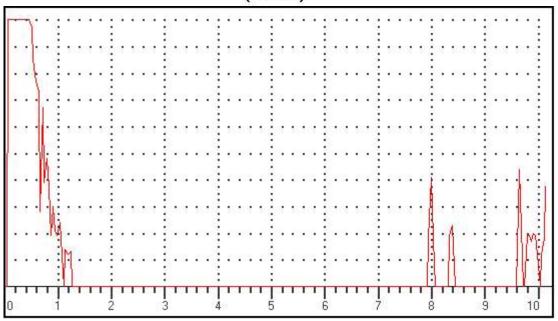

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:11:34
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC67 *

(A-Scan)

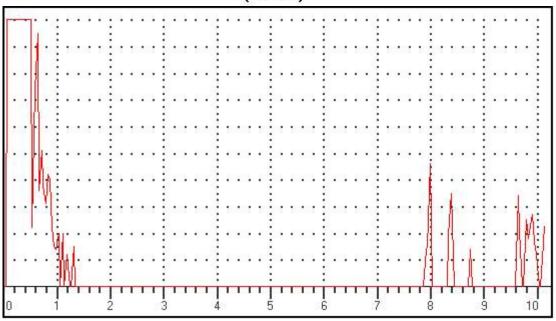

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance):

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Date and Time.......:Dt:3/6/2025 Tm:11:34

UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC68 *

(A-Scan)

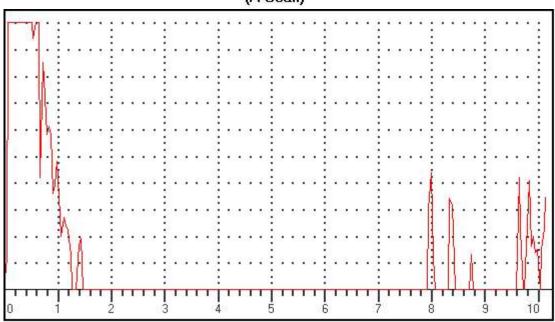

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:11:35 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel ...: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC69 *

(A-Scan)

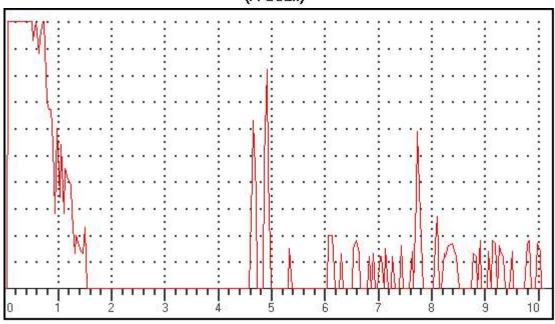

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:3/6/2025 Tm:11:35 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC70 *

(A-Scan)

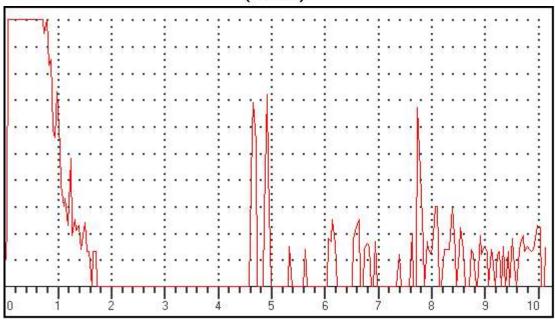

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:11:35 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC71 *

(A-Scan)

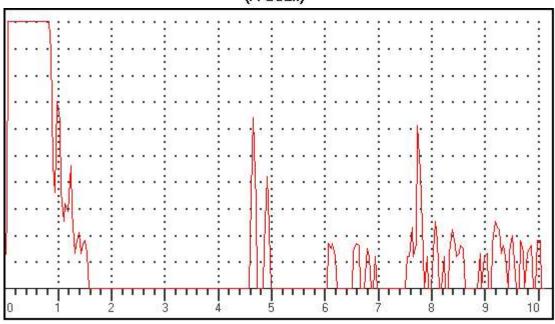

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:11:35 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC72 *

(A-Scan)

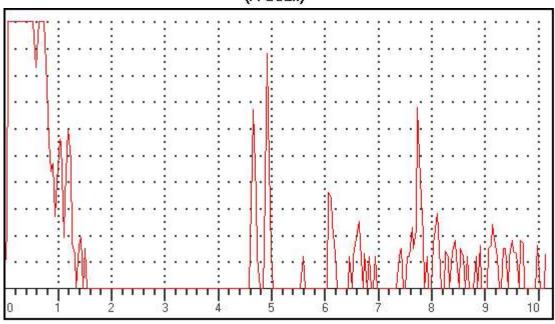

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Surface Distance): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Surface Distance): min

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:11:43 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC73 *

(A-Scan)

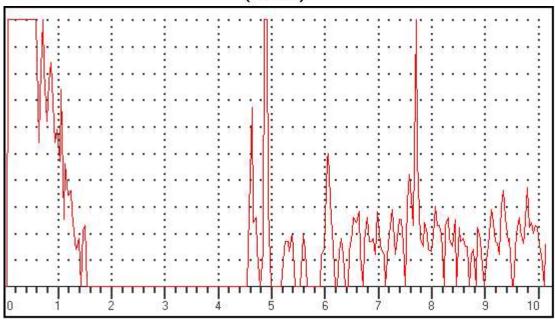

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:11:43 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC74 *

(A-Scan)

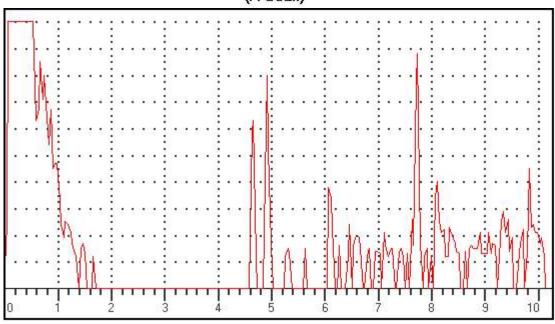

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:11:44 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC75 *

(A-Scan)

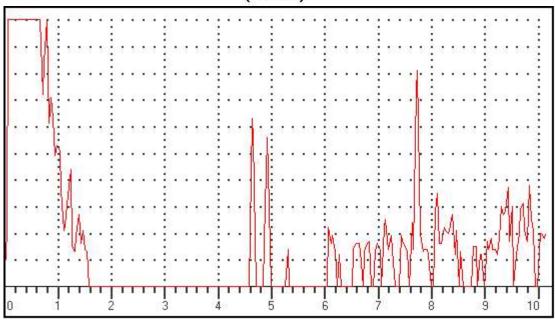

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:11:44 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28650

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC76 *

(A-Scan)

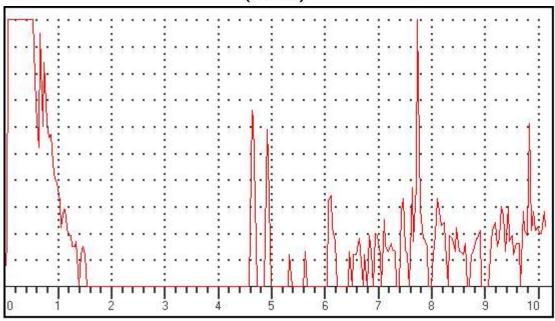

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:3/6/2025 Tm:11:45	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28650
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC77 *	


(A-Scan)

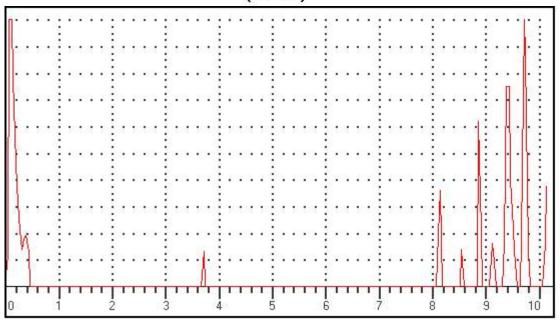

Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:3/6/2025 Tm:11:45	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28650
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC78 *	

(A-Scan)

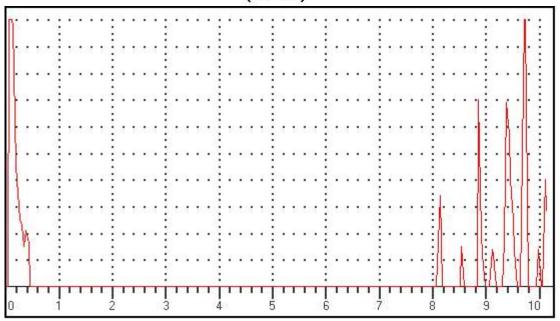


Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time......Dt:3/6/2025 Tm:11:45 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:28650 Operator Name/Code : CK MISHRA Defect Location FE

Test Results (Pass/Fail/other): If other, then Remarks.....

Frame No: ASC79 *

(A-Scan)

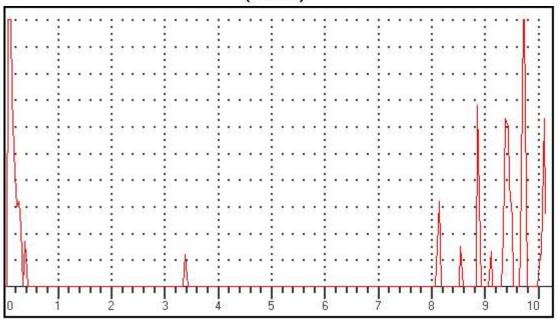

Data Setup

Gain: 40.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Date and TimeDt:3/6/2025 Tm:11:45	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28650
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC80 *

(A-Scan)

.....

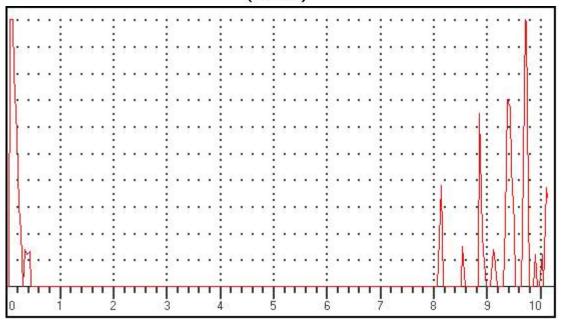


Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 30.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

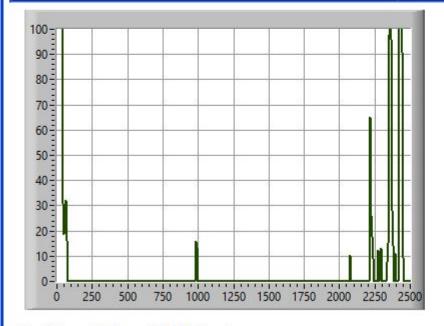

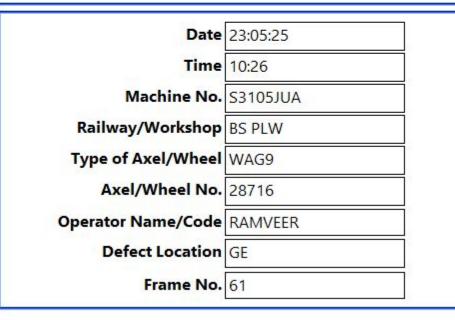


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 30.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

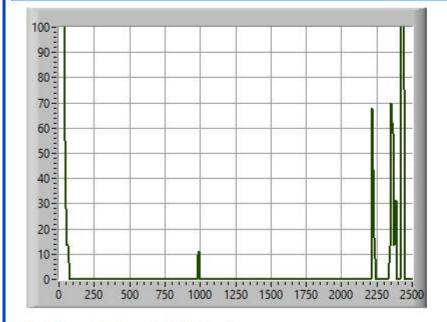

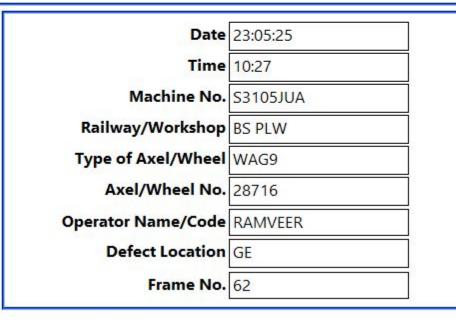


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 30.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

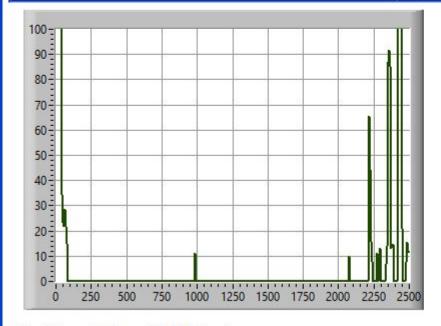

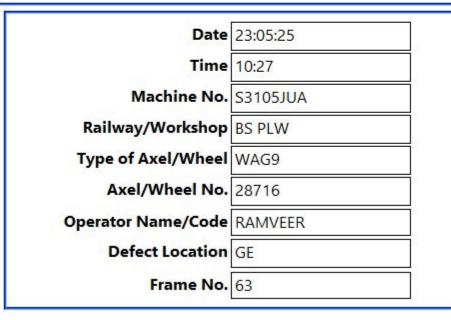


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 30.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

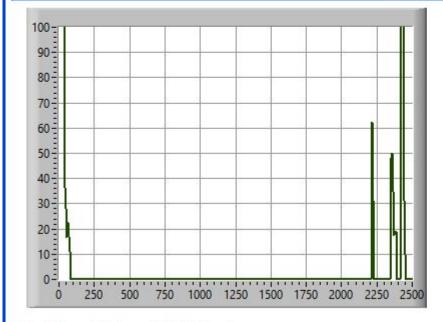

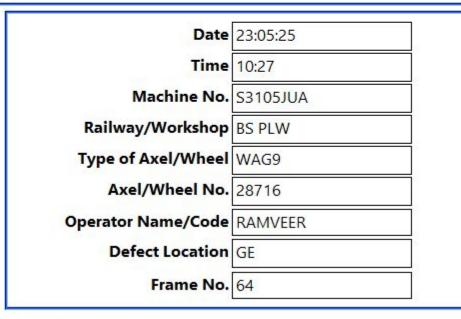


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 43.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status	: OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height)	: 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path)	: 0 mm	
Reject	: 9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance)	: 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth)	: 0 mm	

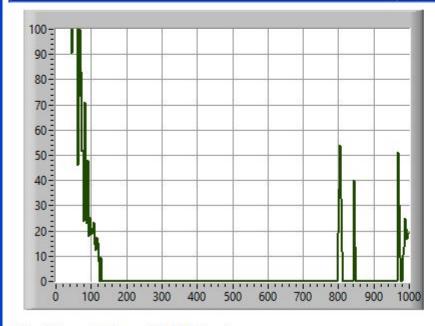

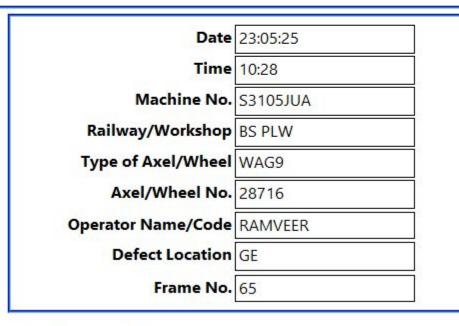


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 39.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

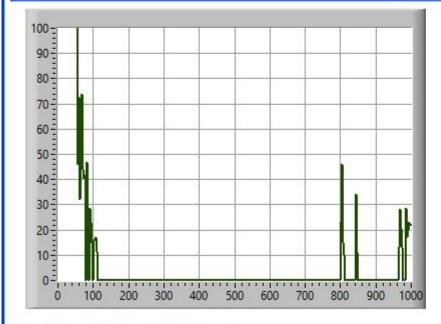

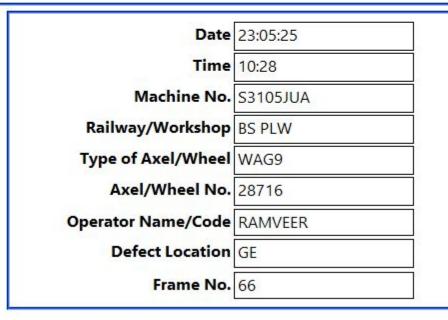


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 39.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

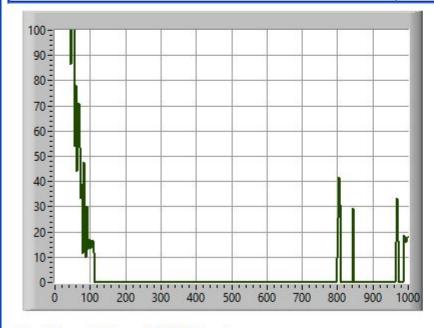

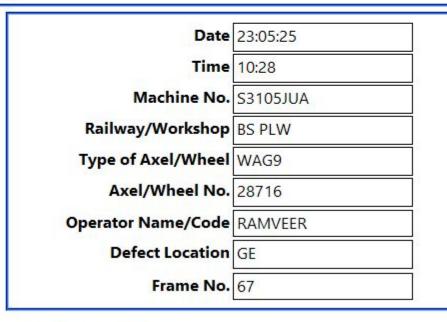


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 39.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 10°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

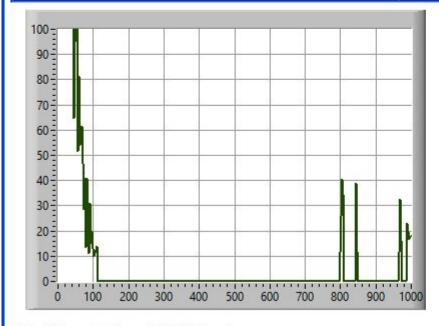

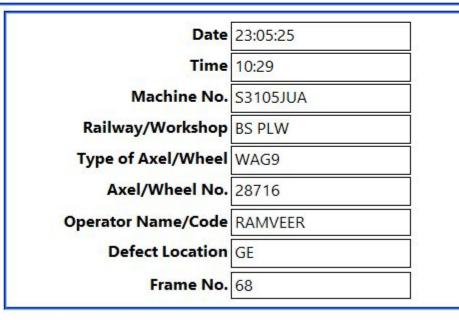


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

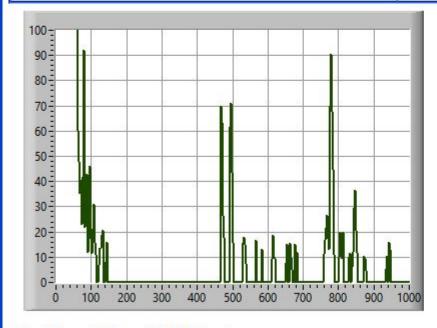

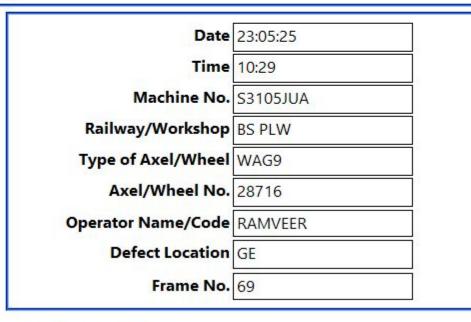


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

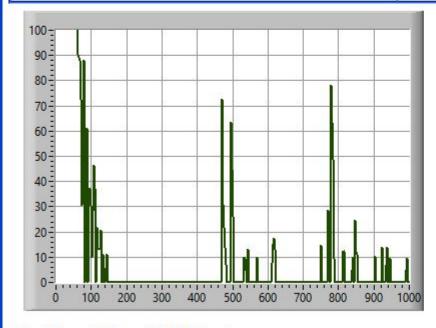

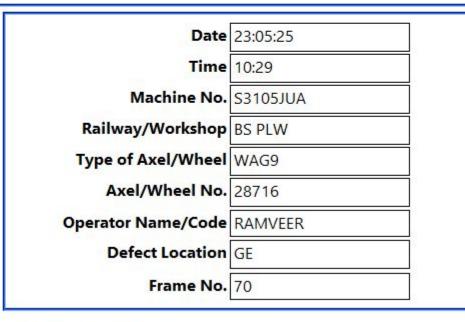


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

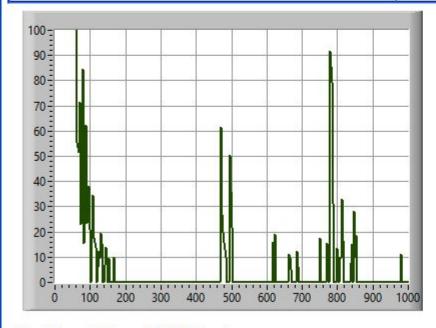

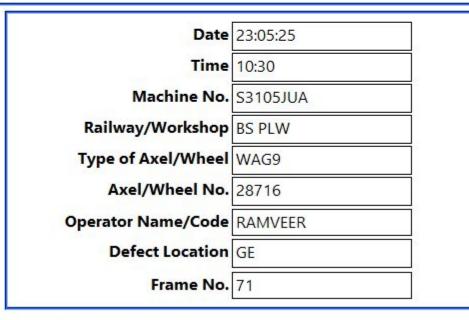


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 45.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance): 0 mm		
Delay	: 0 mm]		Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

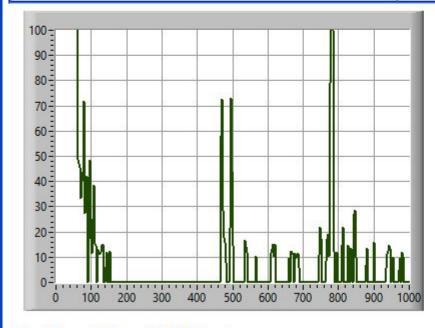

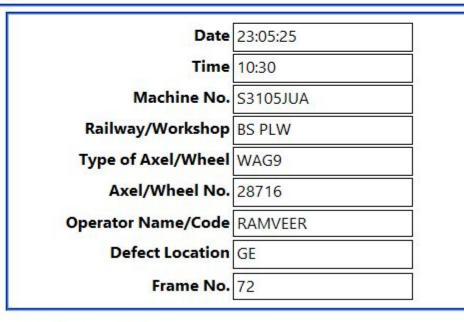


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 41.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

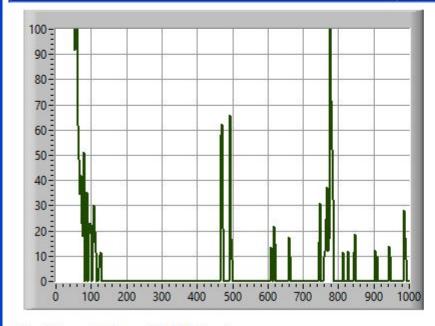

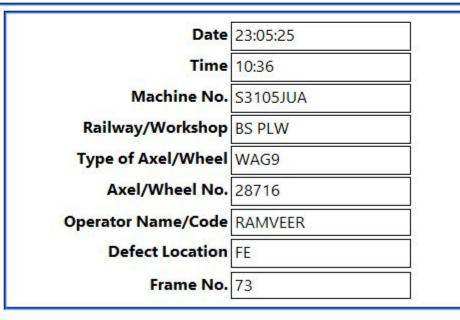


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 41.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

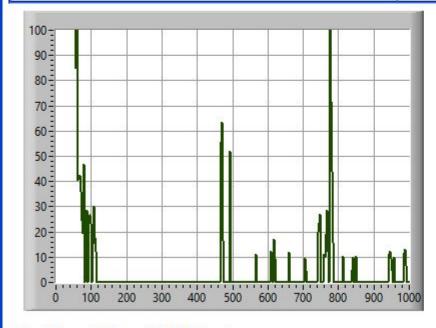

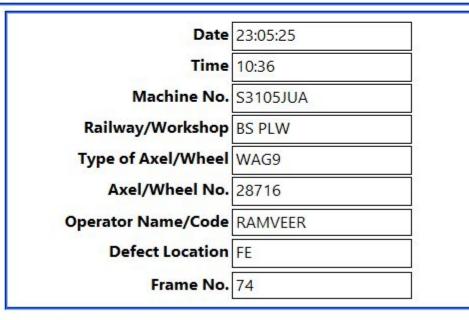


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 **TIME:** 3:25 PM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 41.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

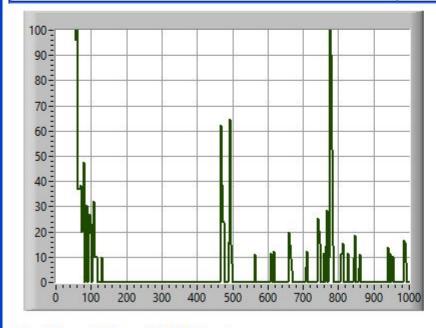

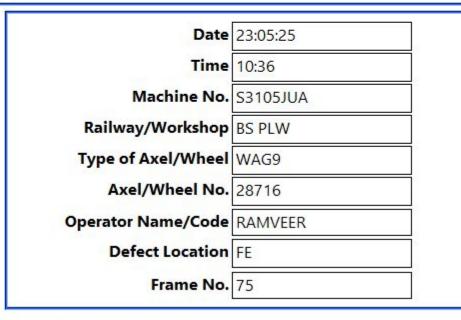


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure			
Gain	: 41.3 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF	
Range	: 1000 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %	
Velosity	: 5910 m/sec	Probe Angle	: 17.5 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm	
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm	
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm	

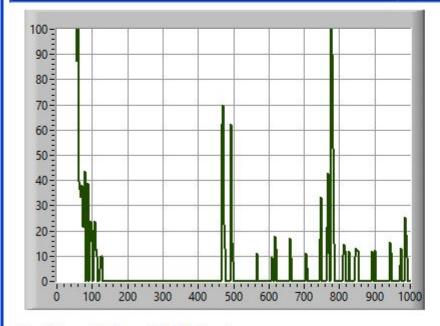

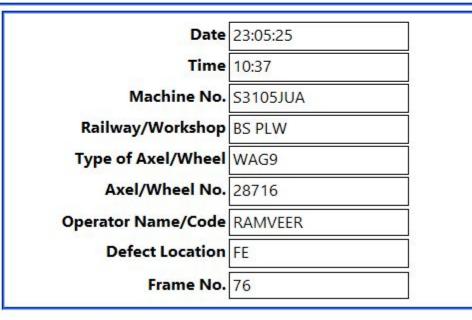


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 25.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

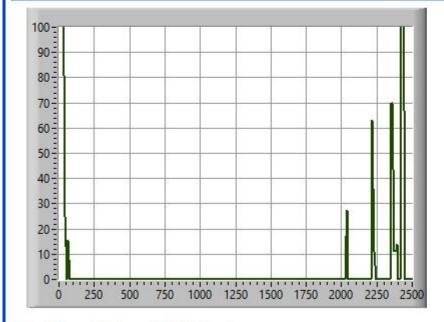

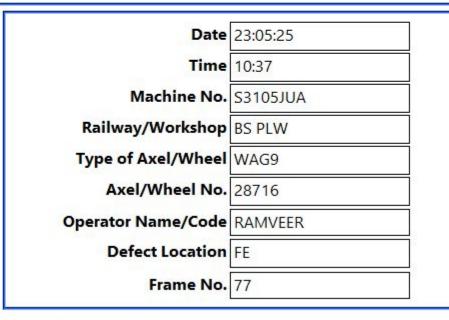


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 25.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

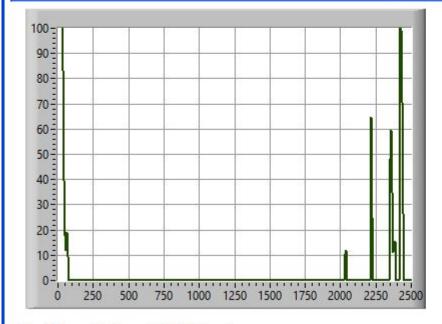

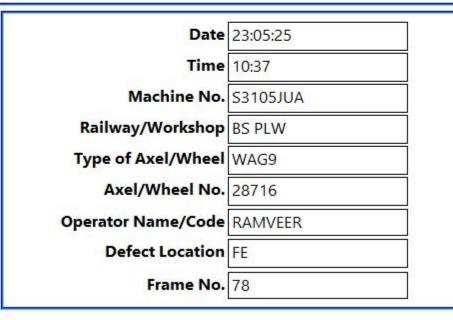


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 **TIME:** 3:25 PM

INSTRUMENT VER: 0000 SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 25.8 dB	Probe Zero	: 3.8	G1 Status	: OFF	G2 Status : OFF		
Range	: 2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	:0°	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

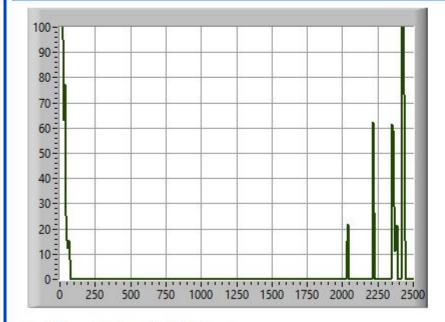

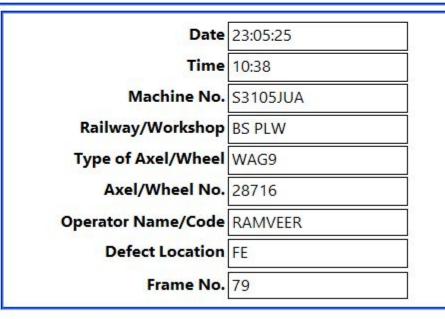


Test Result(Pass/Fail/Other) : If Other, then Remarks :




DATE: 23-May-25 TIME: 3:25 PM INSTRUMENT VER: 0000

SOFTWARE VER: P.0.00.AE.04.06

	Testing Paran	neters		Gate Measure				
Gain	: 25.8 dB	Probe Zero	3.8	G1 Status	: OFF	G2 Status : OFF		
Range	2500 mm	Mode	: Single	Gate 1 (Echo Height)	: 0 %	Gate 2 (Echo Height) : 0 %		
Velosity	: 5910 m/sec	Probe Angle	: 0 °	Gate 1 (Beam Path)	: 0 mm	Gate 2 (Beam Path) : 0 mm		
Reject	9 %	Thickness	: 100 mm	Gate 1 (Surface Distance)	: 0 mm	Gate 2 (Surface Distance) : 0 mm		
Delay	: 0 mm			Gate 1 (Depth)	: 0 mm	Gate 2 (Depth) : 0 mm		

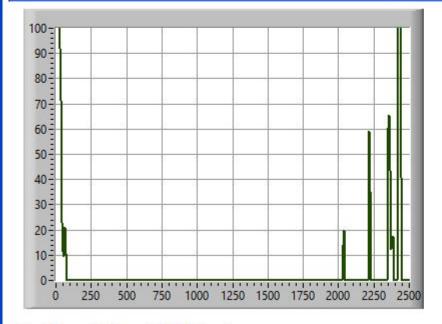

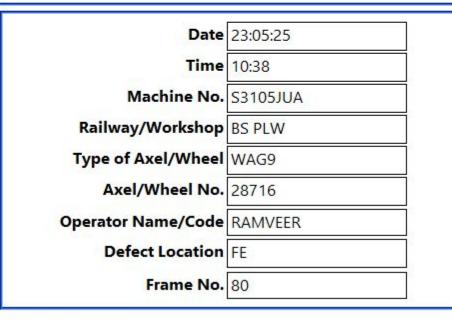


Test Result(Pass/Fail/Other) : If Other, then Remarks :

Date and TimeDt:2/6/2025 Tm:12:22	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28945
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other then Bemarks	

Frame No: ASC161 *


(A-Scan)

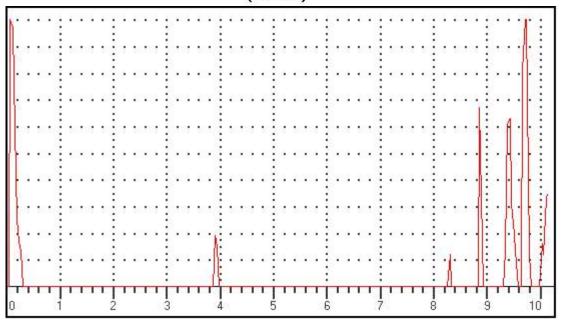

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:2/6/2025 Tm:12:22	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28945
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC162 *	

(A-Scan)

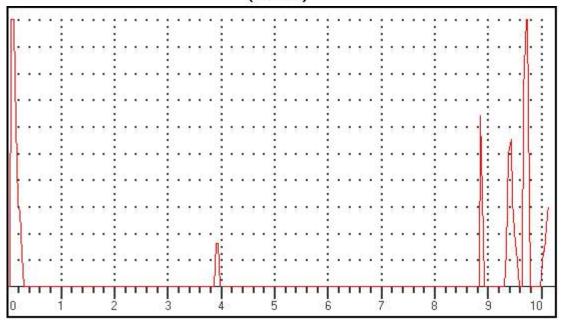

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm


Observation/Remarks (If Any):_____

Gate 2(Depth): mm

Date and Time......Dt:2/6/2025 Tm:12:22 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:28945 Operator Name/Code : CK MISHRA Defect Location GE Test Results (Pass/Fail/other): If other, then Remarks.....

(A-Scan)

Frame No: ASC163 *

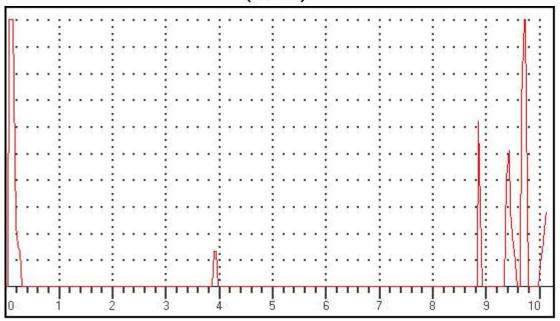

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Data Setup Gain: 38.0 dB RANGE: 2500.00mm MTL VEL: 5920 M/S REJECT: 12 % DELAY: 0.06mm PROBE ZERO: 8.78us

MODE: SINGLE PROBE ANGLE: 0.0DEG


Gate 1(Surface Distance): 0.00mm Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:2/6/2025 Tm:12:22	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28945
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other then Remarks	

Frame No: ASC164 *

Observation/Remarks (If Any):

(A-Scan)

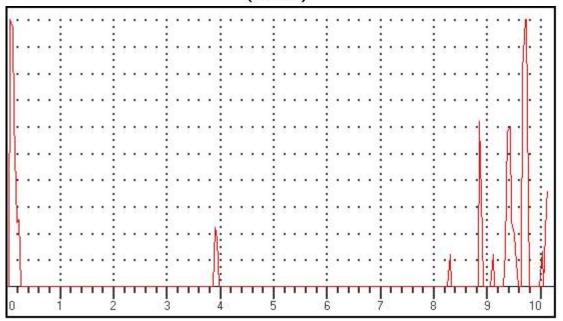

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time......:Dt:2/6/2025 Tm:12:23
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC165 *

(A-Scan)

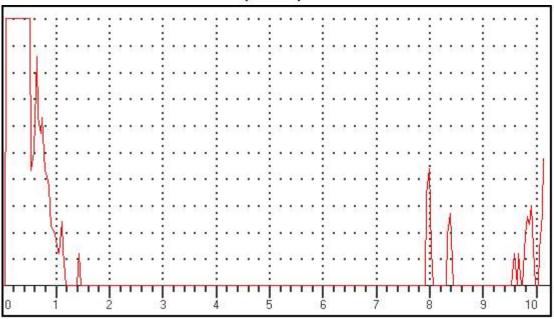

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:2/6/2025 Tm:12:24 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945 Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC166 *

(A-Scan)

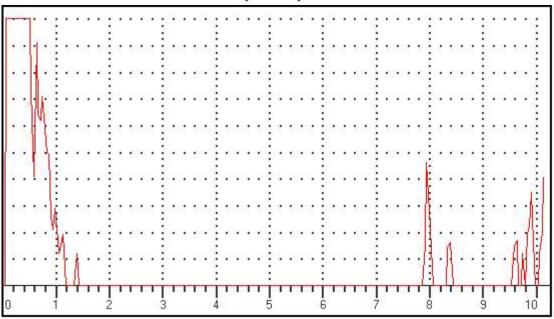

Data Setup

Gain: 50.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:2/6/2025 Tm:12:24

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: WAG9 Axle/wheel No:28945

Operator Name/Code: CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC167 *

(A-Scan)

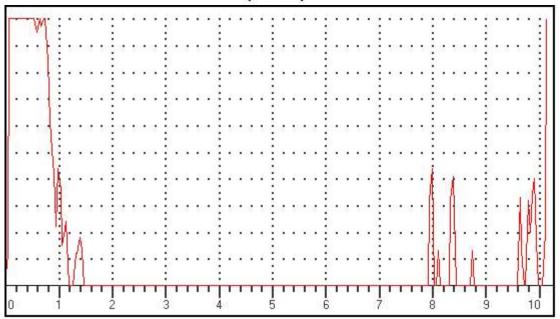

Data Setup

Gain: 50.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Cata 3(Danth); mm

Gate 2(Depth): mm

Date and Time......Dt:2/6/2025 Tm:12:24 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC168 *

(A-Scan)

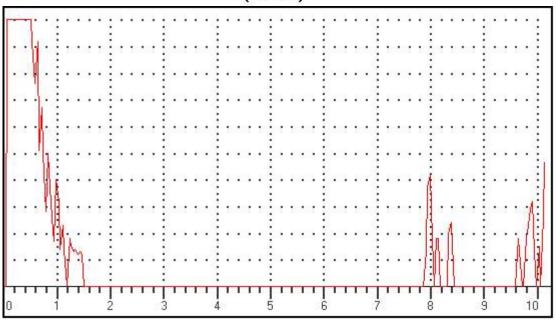

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:2/6/2025 Tm:12:26
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC169 *

(A-Scan)

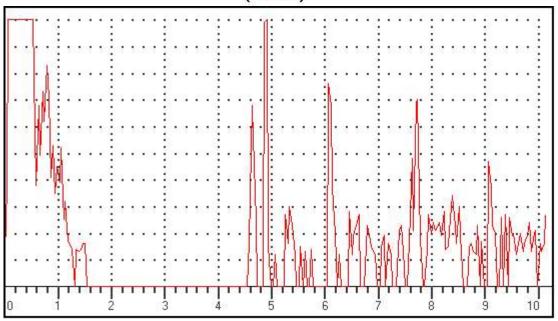

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:2/6/2025 Tm:12:26 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC170 *

(A-Scan)

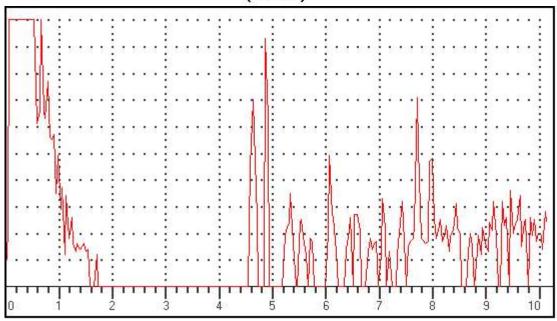

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:2/6/2025 Tm:12:26
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC171 *

(A-Scan)

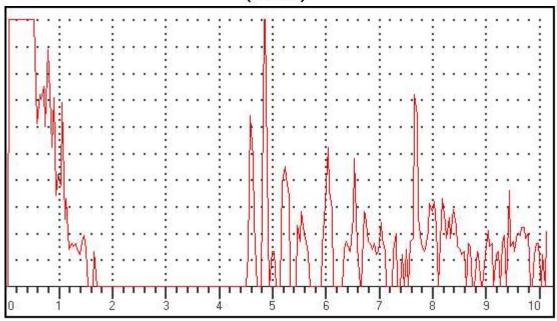

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.........:Dt:2/6/2025 Tm:12:26
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW
Type of Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC172 *

(A-Scan)

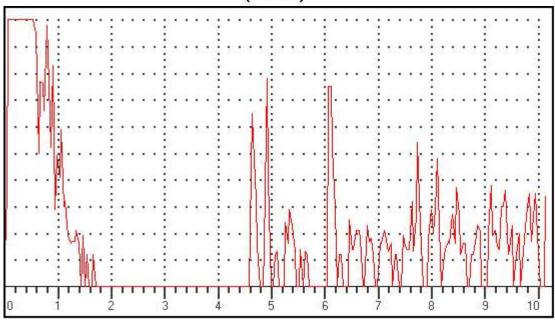

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Surface Distance): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:2/6/2025 Tm:12:33 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect LocationFE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC173 *

(A-Scan)

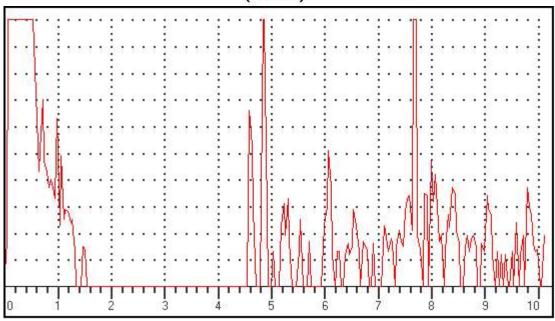

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:2/6/2025 Tm:12:33 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC174 *

(A-Scan)

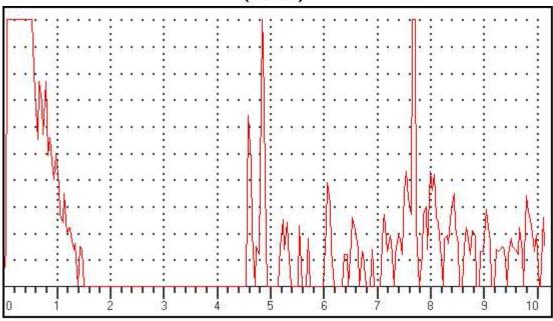

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:2/6/2025 Tm:12:33 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC175 *

(A-Scan)

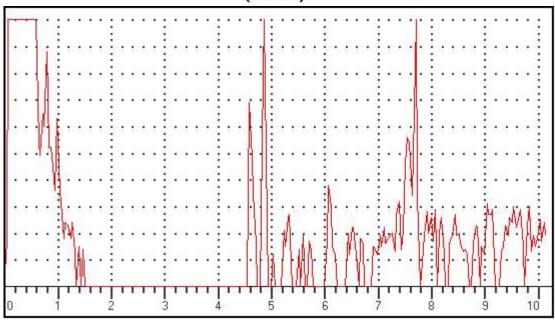

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:2/6/2025 Tm:12:34
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect LocationFE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC176 *

(A-Scan)

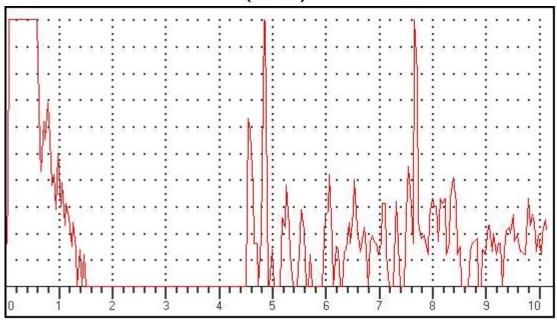

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:2/6/2025 Tm:12:34	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28945
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC177 *	

(A-Scan)

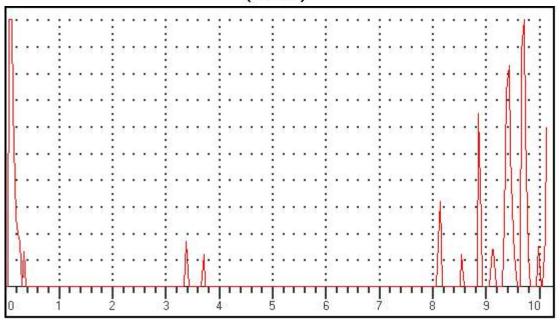

Data Setup Gain: 39.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:2/6/2025 Tm:12:35

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28945


Operator Name/Code : CK MISHRA

Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....Frame No: ASC178 *

(A-Scan)

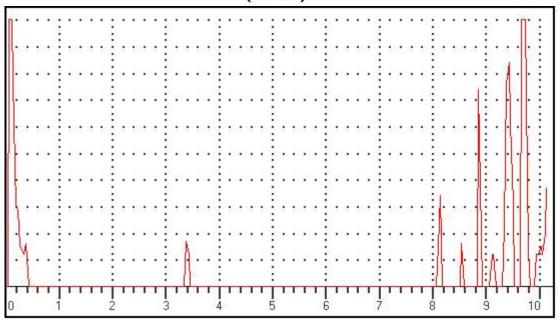

Data Setup
Gain: 39.0 dB
RANGE: 2500.00mm
MTL VEL: 5920 M/S
REJECT: 12 %
DELAY: 0.06mm
PROBE ZERO: 8.78us

MODE: SINGLE
PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF Gate 2 (Status): OFF

Gate 1(Echo height): 0 % Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:2/6/2025 Tm:12:35

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28945

Operator Name/Code : CK MISHRA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC179 *

(A-Scan)

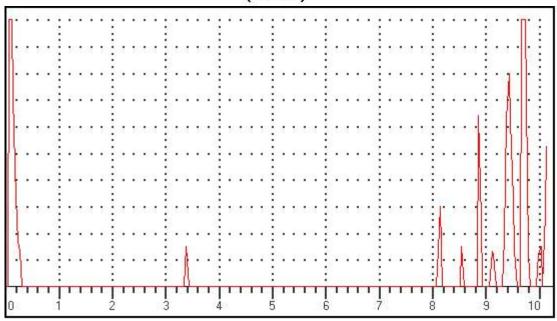

Data Setup Gain: 39.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us MODE: SINGLE

DDORE ANGLE: 0.0

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:2/6/2025 Tm:12:35

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28945


Operator Name/Code : CK MISHRA

Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks......Frame No: ASC180 *

(A-Scan)

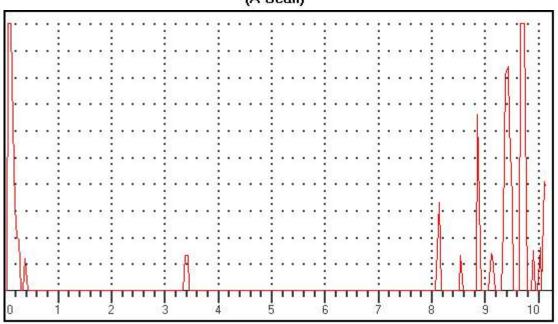

Data Setup Gain: 39.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

TOP 12 COSTLIEST ITEMS OF WAG9HC LOCO WITH WARRANTY CONDITIONS AS PER TENDERS

S No	PL No	DESCRIPTION	Warranty Period
1	29741075	IGBT BASED 3-PHASE DRIVE PROPULSION EQUIPMENT	60 months after commissioning or 72 months from date of supply whichever earlier as per special conditions given by CLW
2	29731057	MAIN TRANSFORMER 7775 KVA TYPE LOT 7500 FOR WAP7 3- PHASE ELECTRIC LOCOMOTIVE TO CLW SPECN NO.CLW/ES/3/0660/C	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
3	29171064	COMPLETE SHELL ASSLY (PIPED & PAINTED) FOR WAP-7 LOCO TO CLW SPEC. NO. CLW/MS/3/152 ALT- 8	AS PER IRS CONDITIONS-30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER.
4	29600418	LOCOMOTIVES TO CLW SPECN. NO. CLW/ES/03/646 ALT-NIL WITH DMW REQUIREMENT OF HARNESSED	As per clause no.9 of CLW Specn. CLW/ES/3/0458 & Clause No.10 of CLW SpecnCLW/ES/3/0459. [18 months after commissioning or 20 months from date of supply for single core & 18 months after commissioning or 24 months from date of supply for multi core]

7	29942007	3-PHASE ASYNCHRONOUS TRACTION MOTOR (RESISTANCE RING MECHANICALLY INTERLOCKED TO END PLATE DESIGN ROTOR, SCHEME-II), TYPE 6FRA-6068 FOR WAP-7 ELECTRIC LOCO WITHOUT ACTIVE SPEED SENSOR TO SPECIFICATION NO. 4TMS.096.081 ALT-2 AND STR NO. CLW/2008/3PHTM/STR/0001.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
6	29480140	COMPLETE FILTER CUBICLE ALONG WITH ALL EQUIPMENTS AND CABLING TO DRG./SPEC NO. [1] CLW/ES/3/0193 ALT-F OR LATEST AND CLW DRG. NO. 1209-15-143-004 ALT-10 AND PART DRG./SPEC NO AS PER ANNEXURE-A ATTACHED.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
5	29180016	BRAKE CONTROL SYSTEM INCLUDING DRIVER'S VIGILANCE CONTROL DEVICE TO SET LIST NO.EL29180016.	As per specification no. CLW/MS/3/001 Alt. 16 i.e. the manufacturer is required to guarantee that the brakevalves/equipment work satisfactorily for a period of five (5) years after commissioning. Any equipment/part which failsduring the guarantee period shall be replaced free of cost by the manufacturer. The replaced components shallfurther be under warranty for five (5) years from the date of their fitment and should the replaced components proveunsatisfactory in service, they shall be replaced by modified and improved components by the supplier free of cost.

8	29105146	Bogie Frame Complete for WAP-7 for 3 Phase Co Co Locomotive to CLW specification No. CLW/MS/3/Bogie/003 alt-1 and CLW Drg.No.1209.01.112-202 Alt-Nil	As per clause 16 of Spec.No.CLW/MS/3/Bogie/003 Alt-1. [60 months after commissioning or 72 months from date of supply]
9	29171192	COMPLETE AUXILIARY CUBICLE HB2 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0192 ALT-E OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
10	29171210	COMPLETE CONTROL CUBICLE SB2 ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0195/A ALT-H OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
11	29171209	COMPLETE CONTROL CUBICLE SB1 (PUSH PULL SCHEME COMPLIANT) ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0194 ALT-G OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
12	29171180	COMPLETE AUXILIARY CUBICLE HB1 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0191 ALT-D OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.



भारत सरकार **GOVERNMENT OF INDIA**

रेल मंत्राल्य

MINISTRY OF RAILWAYS

पटियाला रेलइंजन कारखाना

PATIALA LOCOMOTIVE WORKS

Email: dyceeloco.dmw@gmail.com फैक्स/Fax No.: 0175-2397244

फोन/ Phone: 0175- 2396422 मोबाईल: 9779242310

पटियाला, 147003, भारत PATIALA, 147003, INDIA



(An ISO 9001, ISO 14001, ISO 45001 & ISO 50001, 5S & Green Building certified Organization)

संख्या. PLW/M/ECS/Tech/Kavach

तिथि: As signed

(Through Mail)

Sr. Div. Mechanical Engineer, Diesel Loco Shed, Pune.

Email: srdmedpune@gmail.com

विषय:- Fitment of KAVACH in three Phase Electric Loco, No. 42048 WAG-HC.

संदर्भ:- (i) Director General Stds./Electrical/RDSO letter no. EL/0.1.3/3 dated 21.08.2023.

(ii)Director General Stds./Electrical/RDSO letter no. EL/0.1.3/3 dated 26.09.2023

In ref. to the above letter's Loco No. 42048 has been dispatched with fittings for implementation of KAVACH system in locomotive at home shed in Zonal Railway. This Loco was dispatched to DLS/PADX/CR on 07.07.2025. The details of fittings are attached as Annexure-A (pneumatic fittings), Annexure-B (Kavach equipment mounting Brackets) & Annexure-C (Wago with harnessed lay out).

This is for your information & necessary action please.

(निशांत बंसीवाल)

उप मुख्य विदयुत अभियंता/लोको

प्रतिलिपि:-

CEE/Loco & CEE/D&Q, CMM, CELE/CR:- for kind information please Dy CME/Design, Dy. CMM/Depot: for information & necessary action please AEE/LAS, AWM/LFS&ABS, AWM/ECS: for necessary action please

Loco No. 42048

SN	PL No.	Description of item	Qty.
	nikeni kulis suksikiki	ISOLATING COCK 3/8" (FEMALE) LEGRIS TYPE WITH VENT	04 nos.
1	29163341	ISOLATING COCK 3/8" (FEMALE) LEGRIS TYPE WITHOUT VENT	02 nos.
		TEE UNION 3/8"X3/8" BRASS FITTINGS	02 nos.
		MALE CONNECTORS 3/8" TUBE OD X 3/8" BSPT, BRASS FITTINGS	09 nos.
		MALE CONNECTORS 1/2" TUBE OD X 1/2" BSPT, BRASS FITTINGS	06 nos.
		FEMALE CONNECTORS (NYLON TUBE) DIA 6 TUBE X 3/8" BSPP	01 no.
		BRASS FITTINGS MALE CONNECTOR (NYLON TUBE) DIA 6 TUBE X 3/8" BSPP BRASS	03 nos
	,	FITTINGS FEMALE TEE 3/8" BSPP – BRASS	06 nos
2	29611994	HEX PLUG -3/8" BSPT – BRASS	02 nos
		FEMALE TEE 1/2" BSPP – BRASS	04 nos
		HEX NIPPLE 3/8X3/8" BSPT – BRASS	04 nos
		RED HEX NIPPLE 3/8X1/2" BSPT - BRASS	02 nos
		HEX PLUG – 1/2" BSPT – BRASS	04 nos
		MALE ELBOW CONNECTORS 3/8" TUBE OD X 3/8) BSPT. BRASS FITTINGS	02 nos
3	29170114	Copper Tube OD 9.52mm (3/8") X 1.245 Mm W.T X 6 Mtr	1.2Mtr

AWMARS REFS

SSE**)**G/ABS

		Description of Item	Quantity
1.	PL No. 29611945	Mounting bracket arrangement provided for RF Antenna on the roof top of both driver cabs.	04 nos.
2.		Mounting bracket arrangement provided for GPS/GSM Antenna on the roof top of both driver cabs.	02 nos.
3.		Protection Guards for RFID reader provided behind the cattle	04 nos.
4.		Inspection door with latch provided on the both driver desk covers (LP side) in each cab to access isolation cock.	02 nos.
5.		Cable Entry Plate fitted for routing of cable with RF Antenna & GPS/GSM Antenna bracket.	06 nos.
6.		WAGO bracket fitted in Machine room at back side of SB-1.	01 no.
7.	-	One circular hole of 80 mm dia. provided in each cabs on LP side behind the driver desk toward the wall for routing of OCIP (DMI) cables.	02 nos.
8.		80 mm holes provided on TM1 and TM6 Junction box inspection cover hole for drawing of RFID reader cables.	02 nos.
9.	-	DIN Rail fitted inside the driver desk (LP Side)	02 nos.

AWMIABS & LFS

SSE/G/LFS

Annexure-C

SN	PL No.	Description of Item	Quantity
1.	42310301	Flexible conduit size 25mm ² provided for RF-1, 2 & GPS Antenna cable layout from CAB-1&2 to Machine room.	06 mtr.
2.	29611982	Wago terminals in CAB-1&2 (25 nos. in each CAB).	50 nos.
3.	29611982	Wago terminal in Machine room at back side of SB-1.	75 nos.
4.		Harness provided from KAVACH SB to SB-1	07 wires
5.	-	Harness provided from KAVACH SB to SB-2	05 wires
6.	-	Harness provided from KAVACH SB to Pneumatic Panel	12 wires
7.	-	Harness provided from KAVACH SB to CAB-1	24 wires
8.	_	Harness provided from KAVACH SB to CAB-2	16 wires

AWMES

SSEIGIECS