भारतीय रेल Indian Railways

पटियाला रेलइंजन कारख़ाना, पटियाला

PATIALA LOCOMOTIVE WORKS, PATIALA



LOCO TESTING & DISPATCH REPORT OF IGBT BASED wAg9hc ELECTRIC LOCOMOTIVE

LOCO NO.: 42051

TYPE: WAG9HC

Rail way shed: NFR/MLDD

ProPulsion system: ALSTOM

Date of Dispatch: 25.06.2025

लोको निर्माण रिकार्ड



पटियाला रेलइंजन कारख़ाना, पटियाला PATIALA LOCOMOTIVE WORKS, PATIALA

LOCO NO.: 42051

RAILWAY/SHED: NFR/MLDD

DOD: June-2025

INDEX

SN	PARA	ACTIVITIES	PAGE NO.		
	Testing & Commissioning (ECS)				
1.	1.0	Continuity Test of the cables			
	1.1	Continuity Test of Traction Circuit Cables			
	1.2	Continuity Test of Auxiliary Circuit Cables	1-4		
	1.3	Continuity Test of Battery Circuit Cables			
	1.4	Continuity Test of Screened Control Circuit Cables			
2.	2.0	Low Tension test			
	2.1	Measurement of resistor in OHMS (Ω)	5-6		
	2.2	Check Points	3 3		
_	2.3	Low Tension Test Battery Circuits (without control electronics)			
3	3.0	Downloading of Software			
	3.1	Check Points			
	3.2	Download Software	7-10		
	3.3	Analogue Signal Checking			
	3.4	Functional test in simulation mode			
4	4.0	Sensor test & convertor test			
	4.1	Test wiring Transformer Circuits – Polarity Test			
	4.2	Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)			
	4.3	Primary Voltage Transformer			
	4.4	Minimum voltage relay (Pos. 86)	11-16		
	4.5	Maximum current relay (Pos. 78)			
	4.6	Test por Link Voltage Sensors (Pee 15 6/*)			
	4.7 4.8	Test DC Link Voltage Sensors (Pos 15.6/*) Verification of Converter Protection Circuits (Hardware limits)			
	4.8 4.9	Sequence of BUR contactors			
5.	5.0	Commissioning with High Voltage			
Ο.	5.1	Check List			
	5.2	Safety test main circuit breaker			
	5.3	Auxiliary Converter Commissioning			
	5.3.1	Running test of 3 ph. auxiliary equipments			
	5.3.2	Performance of Auxiliary Converters			
	5.3.3	Performance of BURs when one BUR goes out	16-25		
	5.4	Auxiliary circuit 415/110			
	5.5	Hotel Load Circuit			
	5.6	Traction Converter Commissioning			
	5.7	Test protective shutdown SR			
	5.8	Test Harmonic Filter			
	5.9	Test important components of the locomotive			
6.	6.0	Running Trial of the locomotive	25-26		
7.	7.0	Final Check List to be verified at the time of Loco dispatch	27		
8.	8.0	Status of RDSO modifications	28		
9.	1-10	Pneumatic Test Parameters	29 - 32		
10.		Loco Check Sheet(LAS)	33		
11.	-	Component History (LAS,ECS,ABS)	34-36		
12.	-	Component History & Testing Parameter (Bogie Shop)	37 - 38		
13	-	Warranty Conditions as per Tenders	39 -41		

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 4205 / -ALSTON 1.0 Continuity Test of the cables

Type of Locomotive: WAP-7/WAG-9HC

Page: 1 of 27

1.1 Continuity Test of Traction Circuit Cables

As per cable list given in Para 1.3 of document no. 3 EHX 410 124, check the continuity with continuity tester and megger each cable to be connected between following equipment with 1000V megger.

From	То	Continuity (OK/Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Filter Cubicle	Transformer	OK	100 ΜΩ	600 MA
Filter Cubicle	Terminal Box of Harmonic Filter Resistor (Roof)	ok	100 ΜΩ	650mA
Filter Cubicle	Earthing Choke	ok	100 ΜΩ	boom 1.
Earthing Choke	Earth Return Brushes	ok	100 ΜΩ	600m()
Transformer	Power Converter 1	ok	100 ΜΩ	150MM
Transformer	Power Converter 2	ok	100 ΜΩ	600 m
Power Converter 1	TM1, TM2, TM3	ok	100 ΜΩ	SSOMA
Power Converter 2	TM4, TM5, TM6	吹	100 ΜΩ	SSOM
Earth	Power Converter 1	ok	100 ΜΩ	600m()
Earth	Power Converter 2	ok	100 ΜΩ	600ma

1.2 Continuity Test of Auxiliary Circuit Cables

As per cable list given in Para 1.4 of document no. 3 EHX 410 124, check the continuity with continuity meter and megger each cable to be connected between following equipment with the help of 1000V megger.

Signature of the JE/SSE/Harness

Signature of the JE/SSE/Loco Cabling

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.:

Type of Locomotive: WAP-7/WAG-9HC

Page: 2 of 27

From	То	Continuity(OK/ Not OK)	Prescribed Megger Value (min)	Measured Megger Value
Transformer	BUR1	OK	100 MΩ	SOOMS
Transformer	BUR2	OK	100 MΩ	600 Mrs
Transformer	BUR3	OK	100 MΩ	700M2
Earth	BUR1	OK	100 MΩ	600 MJL
Earth	BUR2	OK	100 MΩ	LMOOF
Earth	BUR3	OK	100 MΩ	600 Mr
BUR1	HB1	OK	100 ΜΩ	700 MIL
BUR2	HB2	OK	100 M Ω	SOOMS
HB1	HB2	OK	100 ΜΩ	GOOMS
HB1	TM Blower 1	OK	100 ΜΩ	700 Mr
HB1	TM Scavenge Blower 1	OK	100 ΜΩ	600 M.S.
HB1	Oil Cooling Unit 1	OK	100 MΩ	700 MJ
HB1	Compressor 1	OK	100 M Ω	SOOMS
HB1	TFP Oil Pump 1	OK	100 MΩ	600 MJ
HB1	Converter Coolant Pump 1	OK	100 ΜΩ	700MS
HB1	MR Blower 1	OR	100 ΜΩ	600M2
HB1	MR Scavenge Blower 1	OK	100 MΩ	700 MJ
HB1	Cab1	OK	100 MΩ	SOO MIL
Cab1	Cab Heater 1	OK .	100 ΜΩ	600 MJZ
HB2	TM Blower 2	OR	100 ΜΩ	700 MJZ
HB2	TM Scavenge Blower 2	OK	100 ΜΩ	600MJ
HB2	Oil Cooling Unit 2	OK	100 ΜΩ	500 MJL
HB2	Compressor 2	OK	100 ΜΩ	600 MJL
HB2	TFP Oil Pump 2	OK	100 ΜΩ	700 M.J.
HB2	Converter Coolant Pump 2	OK ;	100 ΜΩ	600 MJ
HB2	MR Blower 2	OK	100 ΜΩ	500 MJZ
HB2	MR Scavenge Blower 2	OK	100 ΜΩ	600 MJL
HB2	Cab2	OK	100 ΜΩ	500 MJ
Cab2	Cab Heater 2	OK	100 ΜΩ	700 M.L

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter</u>, Auxiliary Converter and TCN based VCU

Locomotive No.: 42051

Type of Locomotive: W

Type of Locomotive: WAP-7/WAG-9HC

1.3 Continuity Test of Battery Circuit Cables

Page: 3 of 27

Check continuity of following cables as per Para 2.3 of document no. 3 EHX 610 299

From	То	Condition	Continuity (OK/Not OK)
Battery (wire no 2093)	Circuit breakers 110- 2, 112.1-1, 310.4-1	By opening and closing MCB 112	als
MCB 110	Connector 50.X7-1	By opening and closing MCB 110	ale
Battery (Wire no. 2052)	Connector 50.X7-2		ok
SB2 (Wire no 2050)	Connector 50.X7-3		atr

Close the MCB 112, 110, 112.1, and 310.4 and	Prescribed value	Measured
measure the resistance of battery wires 2093, 2052, 2050 with respect to the loco earth.	> 0.5 MΩ	Value MΩ
Measure the resistance between 2093 & 2052, 2093 & 2050, 2052 &	Prescribed value:	Measured
2050	> 50 MΩ	Value 70ΜΩ

Commission the indoor lighting of the locomotive as per Sheet No 7A & 7B.

1.4 Continuity Test of Screened Control Circuit Cables

Check the continuity and isolation of the screen cable of the following circuits with the help of sheet no. mentioned against each as per document no. 3 EHX 610 299.

Screened control circuit cables for	Corresponding Sheet Nos.	Continuity & Isolation (OK/Not OK)
Battery voltage measurement	04B	ok
Memotel circuit of cab1 &2	10A	ok
Memotel speed sensor	10A	- Als
Primary voltage detection	01A, 12A	ok
Brake controller cab-1 & 2	06F, 06G	. GIS

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42651

Type of Locomotive: WAP-7/WAG-9HC

Page: 4 of 27

Master controller cab-1 &2	08C, 08D	ok
TE/BE meter bogie-1 & 2	08E, 08F	ok_
Terminal fault indication cab-1 & 2	09F	ak ak
Brake pipe pressure actual BE electric	06H	ok
Primary current sensors	12B, 12F	ak
Harmonic filter current sensors	12B, 12F	ok
Auxiliary current sensors	12B, 12F	ok .
Oil circuit transformer bogie 1	12E, 12I	GK
Magnetization current	12C, 12G	de de
Traction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-1	12D	GK GK
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-2	12D	o _k
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-3	12D	els
Traction motor speed sensors (2 nos.) and temperature sensors (1 no.) of TM-4	12H	ck
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-5	12H	0k
Traction motor speed sensors (2nos) and temperature sensors (1 no.) of TM-6	12H	9f
Train Bus cab 1 & 2 (Wire U13A& U13B to earthing resistance=	13A	ck
10KΩ±±10%)		
UIC line	13B	GK
Connection FLG1-Box TB	13A	ok

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 5 of 27

2.0 Low Tension test

2.1 Measurement of resistor in OHMS (Ω)

Measure the resistances of the load resistors for primary voltage transformer, load resistors for primary current transformer and Resistor harmonic filter as per Para 3.2 of the document no. 3 EHX 610 279.

Name of the resistor	Prescribed value	Measured value
Load resistor for primary voltage transformer (Pos. 74.2).	3.9K Ω ± 10 %	3.9×2
Resister to maximum current relay.	1 Ω ± 10%	125
Load resistor for primary current transformer (Pos. 6.11).	3.3 Ω ± 10%	3.352
Resistance harmonic filter (Pos 8.3). Variation allowed \pm 10%	WAP7	WAP7
Between wire 5 & 6	0.2 Ω	0.20
Between wire 6 & 7	0.2 Ω	0.212
Between wire 5 & 7	0.4 Ω	0.42
For train bus, line U13A to earthing.	10 k Ω ± 10%	10.0kr
For train bus, line U13B to earthing.	10 k Ω ± 10%	99947
Insulation resistance of High Voltage Cable from the top of the roof to the earth (by1000 V megger).	200 MΩ	30000
Resistance measurement earth return brushes Pos. 10/1.	≤0.3 Ω	0.282
Resistance measurement earth return brushes Pos. 10/2.	≤0.3 Ω	0.282
Resistance measurement earth return brushes Pos. 10/3.	≤0.3 Ω	0.291
Resistance measurement earth return brushes Pos. 10/4.	≤0.3 Ω	0.30A
Earthing resistance (earth fault detection) Harmonic Filter –I; Pos. 8.61.	2.2 kΩ ± 10%	2242
Earthing resistance (earth fault detection) Harmonic Filter –II; Pos 8.62.	2.7 k Ω ± 10%	2-7KL
Earthing resistance (earth fault detection) Aux. Converter; Pos. 90.3.	3.9 k Ω ± 10%	3.9kr
Earthing resistance (earth fault detection) 415/110V; Pos. 90.41.	1.8 k Ω ± 10%	1.8Kr
Earthing resistance (earth fault detection) control circuit; Pos. 90.7.	390 Ω ± 10%	390 N
Earthing resistance (earth fault detection) Hotel load; Pos. 37.1(in case of WAP5).	3.3 k Ω ± 10%	NA)
Resistance for headlight dimmer; Pos. 332.3.	10 Ω ± 10%	102

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 48c51

Type of Locomotive: WAP-7/WAG-9HC

ype of Locomotive.

Page: 6 of 27

Make sure that the earthing brush device don't make direct contact with the axle housing, earth connection must go by brushes.

2.2 Check Points

Note:

Items to be checked	Remarks	
Check whether all the earthing connection in roof and machine room as mentioned in sheet no. 22A is done properly or not. These earthing connections must be flexible and should be marked yellow & green	cheeked ok	
Check whether all the earthing connection between loco body and bogie is done properly or not. These cables must be flexible having correct length and cross section	Checked ok	

2.3 Low Tension Test Battery Circuits (without control electronics)

These tests are done with the help of the special type test loop boxes as per procedure given in Para 3.6 of the document no. 3 EHX 610 279

Name of the test	Schematic used.	Remarks
Test 24V supply	Sheet 04F and other linked sheets	cheeked ok
Test 48V supply	Sheet 04F & sheets of group 09	Fan supply to be checked.
Test traction control	Sheets of Group 08.	ok
Test power supply bus stations.	Sheets of Group 09.	Fan supply to be checked.
Test control main apparatus	Sheets of Group 05.	<u>d</u>
Test earth fault detection battery circuit by making artificial earth fault to test the earth fault detection	Sheet 04C	ek
Test control Pneumatic devices	Sheets of Group 06	ok
Test lighting control	Sheets of Group 07	ok
Pretest speedometer	Sheets of Group 10	GK
Pretest vigilance control and fire system	Sheets of Group 11	ok
Power supply train bus	Sheets of Group 13	લ્

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 4205/ 3.0 Downloading of Software Type of Locomotive: WAP-7/WAG-9HC

Page: 7 of 27

3.1 Check Points.	Yes/No
Check that all the cards are physically present in the bus stations and all the plugs are connected.	Yes
Check that all the fibre optic cables are correctly connected to the bus stations.	10
Make sure that control electronics off relay is not energized i.e. disconnect Sub-D 411.LG and loco is set up in simulation mode.	Ye)
Check that battery power is on and all the MCBs (Pos. 127.*) in SB1 &SB2 are on	res

3.2 Download Software

The software of Traction converter, Auxiliary converter and VCU should be done by commissioning engineer of the firm in presence of supervisor. Correct software version of the propulsion equipment to be ensured and noted:

Traction converter-1 software version:	1:0.6.9
Traction converter-2 software version:	1.0.6.9
Auxiliary converter-1 software version:	1.0.10
Auxiliary converter-2 software version:	2.0.1.0
Auxiliary converter-3 software version:	2.0.1.0
Vehicle control unit -1 software version:	6.0.0.18
Vehicle control unit -2 software version:	6.0.0.18

3.3 Analogue Signal Checking

Check for the following analogue signals with the help of diagnostic tool connected with loco.

Description	Signal name	Prescribed value	Measured Value
Brake pipe pressure	FLG2;0101XPrAutoBkLn	100% (= 5 Kg/cm2)	or
Actual BE electric	FLG2; AMSB_0201- Wpn BEdem	100% (= 10V)	علا
TE/BE at 'o' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 9% and 11 %	104,
TE/BE at 'TE maximal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 99 % and 101 %	100/,
TE/BE at 'TE minimal' position from both cab	FLG1; AMSB_0101- Xang Trans FLG2; AMSB_0101- Xang Trans	Between 20 % and 25 %	250.

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u> <u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 8 of 27

TE/BE at 'BE maximal' position from both cab	XangTrans FLG2; AMSB_0101- XangTrans	Between 99% and 101%	1001.
TE/BE at 'BE Minimal' position from both cab	FLG1; AMSB_0101- XangTrans FLG2; AMSB_0101- XangTrans	Between 20% and 25%	257
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1; AMS 0101- LT/BDEM>1/3 HBB2; AMS 0101- LT/BDEM>1/3	Between 42 and 44%	44 ₄ ,
TE/BE at '1/3' position in TE and BE mode in both cab.	HBB1; AMS_0101- LT/BDEM>2/3 HBB2; AMS_0101- LT/BDEM>2/3	Between 72 and 74%	741,
Both temperature sensor of TM1	SLG1; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	2200
Both temperature sensor of TM2	SLG1; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	2200
Both temperature sensor of TM3	SLG1; AMSB_0106- Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0. C to 40°C	21 ^{°C}
Both temperature sensor of TM4	SLG2; AMSB_0106- XAtmp1Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	21.5°c
Both temperature sensor of TM5	SLG2; AMSB_0106- Xatmp2Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	22°C
	Xatmp3Mot	Between 10% to 11.7% depending upon ambient temperature 0°C to 40°C	22℃

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 426 51

Type of Locomotive: WAP-7/WAG-9HC

Page: 9 of 27

3.4 Functional test in simulation mode

Conduct the following functional tests in simulation mode as per Para 5.5 of document no.3EHX 610 281. through the Diagnostic tool/laptop:

Test Function	Result desired in sequence	Result obtained
Emergency shutdown through	VCB must open.	
emergency stop switch 244	Panto must lower.	chedues ok
Shut Down through cab activation	VCB must open.	49.04
switch to OFF position	Panto must lower.	credied ole
Converter and filter contactor	FB contactor 8.41 is closed.	
operation with both Power	By moving reverser handle:	
Converters during Start Up.	Converter pre-charging contactor 12.3 must close after few seconds.	•
•	• Converter contactor 12.4 must close/	,
	• Converter re-charging contactor	Checkelol.
	12.3 must opens.	
	By increasing TE/BE throttle:	
·	• FB contactor 8.41 must open.	
	• FB contactor 8.2 must close.	
	• FB contactor 8.1 must close.	
Converter and filter contactor		
operation with both Power	6	
Converters during Shut Down.	VCB must open.	
	• Panto must lower.	MedieJok
	• Converter contactor 12.4 must open.	MEGGESON
	• FB contactor 8.1 must open.	N
	• FB contactors 8.41 must close.	
	• FB contactor 8.2 must remain closed.	

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 420 S1

Type of Locomotive: WAP-7/WAG-9HC

Page: 10 of 27

Contactor filter adaptation by isolating any bogie	Isolate any one bogie through bogie cut out switch. Wait for self-test of	
	the loco.	
•	• Check that FB contactor 8.1 is open.	
	• Check that FB contactor 8.2 is open.	checked ok
	After raising panto, closing VCB, and setting TE/BE	
	• FB contactor 8.1 closes.	
	• FB contactor 8.2 remains open.	
Test earth fault detection battery	By connecting wire 2050 to	
circuit positive & negative	earth, create earth fault	
	negative potential.	
	message for earth fault	
	By connecting wire 2095	Checkedok
	to earth, create earth	CHECKENOR
	fault positive potential.	
	• message for earth fault	
Test fire system. Create a smoke in	When smoke sensor-1 gets	
the machine room near the FDU.	activated then	
Watch for activation of alarm.	• Alarm triggers and fault	•
	message priority 2	·
	appears on screen.	
	When both smoke sensor	
	1+2 gets activated then	
	A fault message priority	Checked old
	1 appears on screen and	The state of the
·	lamp LSF1 glow.	
,	Start/Running interlock occurs and	
	TE/BE becomes to 0.	
Time, date & loco number	Ensure correct date time and Loco	a to
·	number	0k
		Ì

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 49051

Type of Locomotive: WAP-7/WAG-9HC

4.0 Sensor Test and Converter Test

Page: 11 of 27

4.1 Test wiring main Transformer Circuits

Apply $198V_p/140V_{RMS}$ to the primary winding of the transformer (at 1u; wire no. 2 at surge arrestor and at 1v; wire no. 100 at earthing choke). Measure the output voltage and compare the phase of the following of the transformers.

Output Winding nos.	Description of winding.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
2U ₁ & 2V ₁	For line converter bogie 1 between cable 801A- 804A	10.05V _p and same polarity	10.0400	ou
2U ₄ & 2V ₄	For line converter bogie 1 between cable 811A- 814A	10.05V _p and same polarity	10.0500	SX
2U ₂ & 2V ₂	For line converter bogie 2 between cable 801B- 804B	10.05V _p and same polarity	10.0418	Sk.
2U ₃ & 2V ₃	For line converter bogie 2 between cable 811B- 814B	10.05V _p and same polarity	10.0400	ou
2U _B & 2V _B	For aux. converter 1 between cable 1103- 1117 (in HB1) For Aux converter 2 between cable 1103- 1117 (in HB2)	7.9V _p , 5.6V _{RMS} and same polarity.	7.8 up 5.6 vpms)	9L
2U _F & 2V _F	For harmonic filter between cable 4-12 (in FB)	9.12V _p , 6.45V _{RMS} and same polarity.	9.12 Up 6.44 VRMS	an

4.2 Test wiring auxiliary transformer 1000V/415V-110V (pos. 67)

Apply $141V_p$ / $100V_{RMS}$ to input of the auxiliary transformer at cable no 1203 –1117 and measure the output at

Description of wire no.	Prescribed Output Voltage & Polarity with input supply.	Measured output	Measured polarity
Cable no. 1218 - 1200	58.7V _p , 41.5V _{RMS} and opposite polarity.	58.6.71 41.5VRMJ	ند
Cable no. 1218 – 6500	15.5V _p , 11.0V _{RMS} and opposite polarity.	12:21	a.
		11 2110 - 01	

1. Oupas

Ell oco Tosi

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 12 of 27

4.3 Primary Voltage Transformer

Apply $250V_{eff}/350V_p$ by variac to roof wire 1 and any wire 0 and measure the magnitude and polarity of the output of the primary voltage transformer for both bogies as per the procedure specified and suggested by the traction converter manufacturer. Primary voltage measurement converters (Pos. 224.1/*) & catenary voltmeter (Pos. 74/*)

This test is to be done for each converter.

Activate cab in driving mode and supply $200V_{RMS}$ through variac to wire no 1501 and 1502. Monitor the following parameters through Diagnostic tool and in catenary voltmeter.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1 G 87-XUPrim	25kV	250%	25 km	2804
SLG2_G 87-XUPrim	25 kV	250%	25 KV	26 ×

Decrease the supply voltage below 140 V_{RMS} . VCB must open at this voltage. In this case the readings in Diagnostic Tool and catenary voltmeter will be as follows.

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1 G 87-XUPrim	17kV	170%	17 Ku	120 x
SLG2_G 87-XUPrim	17 kV	170%	12 KV	120 %

Reactivate VCB to on by increasing this voltage to 175% (17.5 kV).

Increase the supply to 240 V_{RMS} through variac. VCB must open at this voltage, In this case the readings in **diagnostic tool** and catenary voltmeter will be as follows:

Signal name	Prescribed value in catenary voltmeter	Prescribed value in Micview	Monitored value in catenary voltmeter	Monitored value in SR diagnostic tool
SLG1_G 87-XUPrim	30kV	300%	30 KV	300 %
SLG2_G 87-XUPrim	30 kV	300%	30 KW	300 %

Reactivate VCB to on by decreasing this voltage to 290% (29 kV).

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42651

Type of Locomotive: WAP-7/WAG-9HC

Page: 13 of 27

4.4 Minimum voltage relay (Pos. 86)

Functionality test:

Minimum voltage relay (Pos. 86) must be adjus	sted to approx 68%
Activate loco in cooling mode. Check Power supply of 48V to minimum voltage relay. Disconnect primary voltage transformer (wire no. 1511 and 1512) from load resistor (Pos. 74.2) and connect variac to wire no. 1501 and 1502. Supply 200V _{RMS} through variac. In this case; <i>Minimum voltage relay (Pos. 86) picks up</i>	N/Yes/No)
Truto activate the calcius deliving and de	
Try to activate the cab in driving mode: Contactor 218 do not close; the control	(Yes/No)
electronics is not be working.	
Turn off the variac :	(Yes/No)
Contactor 218 closes; the control electronics is be	
working	
Test Under Voltage Protection	· ·
Activate the cab in cooling mode; Raise panto;	c(Kes/No)
Supply 200V _{RMS} through variac to wire no. 1501	
& 1502; Close the VCB; Interrupt the supply	
voltage	
The VCB goes off after 2 second time delay.	
Again supply 200V _{RMS} through variac to wire no.	(Yés/No)
1501 & 1502; Decrease the supply voltage below	
140V _{RMS} ± 4V;	•
Fine tune the minimum voltage relay so that VCB opens.	· · · · · · · · · · · · · · · · · · ·

4.5 Maximum current relay (Pos. 78)	
Disconnect wire 1521 & 1522 of primary current trans &1522 (including the resistor at Pos. 6.11); Put loco in sim on contact 136.3; Close VCB; supply 3.6A _{RMS} at the operaximum current relay Pos. 78 for correct over current variance.	ulation for driving mode; Open $R_3 - R_4$ en wire 1521; Tune the drum of the
VCB opens with Priority 1 fault message on display.	(Ves/No)
Keep contact R_3 – R_4 of 136.3 closed; Close VCB; Tune the /9.9 A_p at the open wire 1521;	resistor 78.1 for the current of 7.0A _{RMS}
VCB opens with Priority 1 fault message on display.	(Yes/No)

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 14 of 27

4.6 Test current sensors

Name of the sensor	Description of the test	Prescribed value	Set/Measured value
Primary return current sensor (Test-1,Pos.6.2/1 & 6.2/2)	Activate cab in driving mode supply 10A. Measure the current through diagnostic tool or measuring print.	(Variation allowed is ± 10%)	1
Primary return current	Supply 90mA _{DC} to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)		
sensor (Test-2, Pos.6.2/1 & 6.2/2)	Supply 297mA _{DC} to the test winding of sensor through connector 415.AA/1or 2 pin no. 7(+) & 8(-)	•	298mg
Auxiliary winding current sensor (Pos. 42.3/1 & 42.3/2)	Supply 90mA _{DC} to the test winding of sensor through connector 415.AC/1or 2 pin no. 7(+) & 8(-) Supply 333mA _{DC} to the test winding of		
	sensor through connector 415.AC/1 or 2 pin no. 7(+) & 8(-)		338 ma
Harmonic filter current sensors (Pos.8.5/1 &8.5/2)	Supply 90mA _{DC} to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)		
	Supply 342mA _{DC} to the test winding of sensor through connector 415.AE/1or 2 pin no. 7(+) & 8(-)	_	347ma
Hotel load current sensors (Pos. 33/1 &	Switch on hotel load. Supply 90mA _{DC} to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) & 8(-)	NA	NA
33/2)	Supply 1242mA _{DC} to the test winding of sensor through connector 415.AG/1or 2 pin no. 7(+) & 8(-)	Net	NA

Effective Date: Feb 2022

Doc.No.F/ECS/01

?2 (Ref: WI/ECS/10) PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u> <u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 4251

Type of Locomotive: WAP-7/WAG-9HC

4.7 Test DC Link Voltage Sensors (Pos 15.6/*)

Page: 15 of 27

This test is to be done by the commissioning engineer of the firm if required.

4.8 Verification of Converter Protection Circuits (Hardware limits)

This test is to be done as per para 6.17 of the document no. 3EHX 610 282 for both the converters.

Protection circuits	Limit on which shutdown should take place	Measured limit
Current sensors (Pos 18.2/1, 18.2/2, 18.2/3, 18.4/4, 18.5/1, 18.5/2, 18.5/3) for Power Converter 1	Increase the current quickly in the test winding of the current sensors, VCB will off at 2.52A with priority 1 fault for each sensor.	For 18.2/1= For 18.2/2= For 18.2/3= For 18.4/4= For 18.5/1= For 18.5/2= For 18.5/3=
Current sensors (Pos 18.2/1, 18.2/2, 18.2/3, 18.4/4, 18.5/1, 18.5/2, 18.5/3) for Power Converter 2	Increase the current quickly in the test winding of the current sensors, VCB will off at 2.52A with priority 1 fault for each sensor.	For 18.2/1= For 8.2/2= For 18.2/3= For 18.4/4= For 18.5/1= For 18.5/2= For 18.5/3=
Fibre optic failure In Power Converter1	Remove one of the orange fibre optic plugs on traction converter. VCB should trip	ok
Fibre optic failure In Power Converter2	Remove one of the orange fibre optic plugs on traction converter. VCB should trip	Q _K

4.9 Sequence of BUR contactors

The sequence of operation of BUR contactors for 'ALL BUR OK' BUR 1 out BUR 2 out and BUR 3 out condition has to be verified by putting the Loco in driving mode (VCB should not be closed) and isolating the BURs one by one. In these condition following will be the contactor sequence.

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
AI BUR OK	Close	Open	Close	Open	Close	Open	Close	Close	Open
BUR1 off	Close	Open	Close	Close	Open	Close	Open	Open	Close
BUR2 off	Open	Open	Close	Close	Close	Close	Open	Open	Close
BUR3 off	Open	Close	Open	Close	Close	Close	Open	Open	Close

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 4065/

Type of Locomotive: WAP-7/WAG-9HC

Page: 16 of 27

Monitored contactor sequence

Status	52/1	52/2	52/3	52/4	52/5	52.4/1	52.4/2	52.5/1	52.5/2
Al BUR OK	1000	over	Clor	, de-	10000	open	18000	1000	ole-
BUR1 off	Colore					r 09/2			10000
BUR2 off	Den			_	- /	00000		7	core
BUR3 off	der	U		Ĵ		Clare	7	de	cere

5.0 Commissioning with High Voltage

5.1 Check List

Items to be checked	Yes/No
Fibre optic cables connected correctly.	40
No rubbish in machine room, on the roof, under the loco.	400
All the electronic Sub-D and connectors connected	Yes
All the MCBs of the HB1 & HB2 open.	res
All the three fuses 40/* of the auxiliary converters	Yes
The fuse of the 415/110V auxiliary circuit (in HB1) open.	10
Roof to roof earthing and roof to cab earthing done	403
Fixing, connection and earthing in the surge arrestor done correctly.	Yes
Connection in all the traction motors done correctly.	yes
All the bogie body connection and earthing connection done correctly.	405
Pulse generator (Pos. 94.1) connection done correctly.	Yes
All the oil cocks of the gate valve of the transformer in open condition.	Yay
All covers on Aux & Power converters, Filter block, HB1, HB2 fitted	401
KABA key interlocking system.	403

5.2 Safety test main circuit breaker

Prepare to switch off the catenary supply during the first charging of the locomotive in case of any unexpected behavior of the electrical component of the loco. Charge the loco for the first time by closing BLDJ switch. The VCB will trip after certain time as no oil/coolant pumps are running yet.

Perform the following safety test of main circuit breaker through both the cabs of the locomotive.

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 17 of 27

Name of the test	Description of the test	Expected result	Monitored result
Emergency stop in cooling mode	Raise panto in cooling mode. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	ch eched o h
Emergency stop in driving mode	Raise panto in driving mode in. Put the brake controller into RUN position. Close the VCB. Push emergency stop button 244.	VCB must open. Panto must lower. Emergency brake will be applied.	cnediced ob
Under voltage protection in cooling mode	Raise panto in cooling mode. Close the VCB. Switch off the supply of catenary by isolator	VCB must open.	Creekes ok
Under voltage protection in driving mode	Raise panto in driving mode. Close the VCB. Switch off the supply of catenary by isolator	VCB must open with diagnostic message that catenary voltage out of limits	chedelok
Shut down in cooling mode.	Raise panto in cooling mode. Close the VCB. Bring the BL- key in O position.	VCB must open. Panto must lower.	checkedole
Shutdown in driving mode	Raise panto in driving mode. Close the VCB. Bring the BL-key in O position.	VCB must open. Panto must lower.	creeked ok
Interlocking pantograph- VCB in cooling mode	Raise panto in cooling mode. Close the VCB. Lower the pantograph by ZPT	VCB must open.	Cuecked ok
Interlocking pantograph- VCB in driving mode	Raise panto in driving mode. Close the VCB. Lower the pantograph by ZPT	VCB must open.	Caechelek

Doc.No.F/ECS/01 Effective Date: Feb 2022 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 4205 ۱

Type of Locomotive: WAP-7/WAG-9HC

Page: 18 of 27

5.3 Auxiliary Converter Commissioning

Switch on the high voltage supply and set up the loco in driving mode. Raise the panto. Close the VCB. Check that there is no earth fault in the auxiliary circuit, Switch off the VCB. Lower the panto. Create the earth fault in auxiliary circuit by making connection between wire no 1117(in HB2 cubicle) and earth. After 3 minutes a diagnostic message will come that "Earth fault auxiliary circuit."

5.3.1 Running test of 3 ph. auxiliary equipments

Switch on the 3 ph. auxiliary equipment one by one. Check the direction of rotation of each auxiliary machine and measure the continuous current and starting current drawn by them.

Name of the auxiliary machine	Typical phase current	Measured continuous phase current	Measured starting phase current
Oil pump transformer 1	9.8 amps	9.1	10.1
Oil pump transformer 2	9.8 amps	9.8	10,0
Coolant pump converter 1	19.6 amps	56	9.0
Coolant pump converter 2	19.6 amps	5.5	8,0
Oil cooling blower unit 1	40.0 amps	45.0	105-0
Oil cooling blower unit 2	40.0 amps	46.0	110.0
Traction motor blower 1	34.0 amps	32.0	95.0
Traction motor blower 2	34.0 amps	33.0	88. o
Sc. Blower to Traction motor blower 1	6.0 amps	2.9	g. 0
Sc. Blower to Traction motor blower 1	6.0 amps	3.0	7.0
Compressor 1	25 amps at 0 kg/ cm ² 40 amps at 10 kg/ cm ²	26.3	48.0
Compressor 2	25 amps at 0 kg/ cm ² 40 amps at 10 kg/ cm ²	25.0	44.0

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 19 of 27

5.3.2 Performance of Auxiliary Converters

Measure the performance of the auxiliary converters through software and record it.

BUR1 (Condition: Switch off all the load of BUR 1)- to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed value	Monitored value	Value under Limit (Yes/No)
BUR1 7303 XUUN	Input voltage to BUR1	75% (10%=125V)	10004	Yey
BUR1 7303 XUUZ1	DC link voltage of BUR1	60% (10%=100V)	636	Yes
BUR1 7303 XUIZ1	DC link current of BUR1	0% (10%=50A)	Med!	Ye

BUR2 (Condition: Switch off all the load of BUR 2, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed value by the firm	Monitored value	Value under Limit (Yes/No)
BUR2 7303-XUUN	Input voltage to BUR2	75% (10%=125V)	1002	40,
BUR2 7303-XUUZ1	DC link voltage of BUR2	60% (10%=100V)	637V	Yes .
BUR2 7303-XUIZ 1	DC link current of BUR2	1% (10%=50A)*	7 Amy	Yey
BUR2 7303-XUILG	Current battery charger of BUR2	3% (10%=100A)*	21 Bmb	Yey
BUR2 7303-XUIB1	Current battery of BUR2	1.5%(10%=100A)*	1180	Yey
BUR2 7303 -XUUB	Voltage battery of BUR2	110%(10%=10V)	1100	Yey

^{*} Readings are dependent upon charging condition of the battery.

BUR3 (Condition: Switch off all the load of BUR 3, Battery Charger on) to be filled by commissioning engineer of the firm.

Signal name	Description of the signal	Prescribed set value by the firm	Monitored value	Value under limit (Yes/No)
BUR3 7303-XUUN	Input voltage to BUR3	75% (10%=125V	1002	409
BUR3 7303- XUUZ1	DC link voltage of BUR3	60% (10%=100V)	637J	Yey
BUR3 7303-XUIZ 1	DC link current of BUR3	1% (10%=50A)*	7 Amh	Yey
BUR3 7303-XUILG	Current battery charger of BUR 3	3% (10%=100A)*	21 Bm	Yey
BUR3 7303-XUIB1	Current battery of BUR 3	1.5%(10%=100A)*	117Am)	Ye,
BUR3 7303-XUUB	Voltage battery of BUR 3	110%(10%=10V)	1100	Te,

^{*} Readings are dependent upon charging condition of the battery.

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 20 of 27

5.3.3 Performance of BURs when one BUR goes out

When any one BUR goes out then rest of the two BURs should take the load of all the auxiliaries at ventilation level 3 of the locomotive.

Condition of BURs	Loads on BUR1	Loads in BUR2	Loads in BUR3
All BURs OK	Oil Cooling unit 1&2	TM blower1&2, TFP oil pump 1&2, SR coolant pump 1&2.	Compressor 1&2, Battery C charger and TM Scavenger blower 1&2
BUR 1 out		Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2,TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.
BUR 2 out	Oil Cooling unit 1&2, TM blower 1&2, TM Scavenger blower 1&2		Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.
BUR 3 out	Oil Cooling unit 1&2, TM blower1&2, TM Scavenger blower 1&2	Compressor 1&2, TFP oil pump 1&2, SR coolant pump 1&2 and Battery charger.	

5.4 Auxiliary circuit 415/110

For checking earth fault detection, make a connection between wire no. 1218 and vehicle body. On switching on VCB, Earth fault relay 89.5 must pick up and after 3 minutes a message will come in the Diagnostic display that Earth Fault 415/110V Circuit

Switch on the 1 ph. auxiliary equipment one by one. Check the direction of rotation of each auxiliary machine and measure the continuous current and starting current drawn by them.

Name of the auxiliary machine	Typical phase current	Measured phase current	Measured starting current
Machine room blower 1	15.0 amps*	4.0	11.0
Machine room blower 2	15.0 amps*	4.1	123
Sc. Blower to MR blower 1	1.3 amps	1.3	g. 4
Sc. Blower to MR blower 2	1.3 amps	1.3	2.5
Ventilator cab heater 1	1.1 amps	1.2	1.8
Ventilator cab heater 2	1.1 amps	1.5	1.8
Cab heater 1	4.8 amps	4.9	5.1
Cab heater 2	4.8 amps	4.9	5.1

^{*} For indigenous MR blowers.

G

Doc.No.F/ECS/01 Effective Date: Feb 2022 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU

Locomotive No.: 420 51

Type of Locomotive: WAP-7/WAG-9HC

Page: 21 of 27

5.5 Hotel load circuit (Not applicable for WAG-9HC)

For WAP-7 locomotive with Hotel load converter refer to Annexure-HLC

5.6 Traction Converter Commissioning

This test is carried out in association with Firm.

Traction converter commissioning is being done one at a time. For testing Converter 1, switch off the traction converter 2 by switch bogie cut out switch 154. For testing Converter 2, switch off the traction converter 2 by switch bogie cut out switch 154. Isolate the harmonic filter also by switch 160. Start up the loco by one converter. Follow the functionality tests.

For Converter 1

Test Function	Results desired	Result obtained
Measurement of charging and pre-charging and charging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheeleed ale
Measurement of discharging of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked ok
Earth fault detection on positive potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	enecled ob
Earth fault detection on negative potential of DC Link of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	inespect ob
Earth fault detection on AC part of the traction circuit of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	chedole
Pulsing of line converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked ok
Pulsing of drive converter of Converter 1	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked •k

Effective Date: Feb 2022

Doc.No.F/ECS/01

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 22 of 27

For Converter 2

Test Function	Results desired in sequence	Result obtained
Measurement of charging and pre-charging and charging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheekeed ok
Measurement of discharging of DC Link of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checies ok
positive potential of DC Link of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cneeked ok
	Traction converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/v	chelled ole
Earth fault detection on AC part of the traction circuit of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheeked ok
Pulsing of line converter of Converter 2.	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	cheeleed ole
Pulsing of drive converter of Converter 2	Traction converter manufacturer to declare the successful operation and demonstrate the same to the PLW supervisor.	checked ok

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42 51

Type of Locomotive: WAP-7/WAG-9HC

. Page: 23 of 27

5.7 Test protective shutdown SR

Test Function	Results desired in sequence	Result obtained
Measurement of protective shutdown by Converter 1 electronics.	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Remove one of the orange fibre optic feedback cable from converter 1Check that converter 1 electronics produces a protective shut down. • VCB goes off • Priority 1 fault mesg. on DDU appears	o Checked ole
Measurement of	Start up the loco with both the	
protective shutdown	converter. Raise panto. Close VCB.	•
by Converter 2	Move Reverser handle to forward or	
electronics.	reverse. Remove one of the orange	
:	fibre optic feedback cable from converter 2. Check that converter 2 electronics produces a protective shut	chelked ob
	down.	
*	VCB goes off	
	Priority 1 fault mesg. on diagnostic	
	display appears	
	Disturbance in Converter 2	

5.8 Test Harmonic Filter

Switch on the filter by switch 160

Test Function	Results desired in sequence	Result obtained
Measurement of filter currents	Start up the loco with both the converter. Raise panto. Close VCB. Move Reverser handle to forward or reverse. Apply a small value of TE/BE by moving the throttle. • FB contactor 8.41 must open.	Checked ak

(Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42.51

Type of Locomotive: WAP-7/WAG-9HC

Page: 24 of 27

· · · · · · · · · · · · · · · · · · ·	T	1
	• FB contactor 8.2 must close.	
	• FB contactor 8.1 must close	
	 Check the filter current in 	
	diagnostic laptop /	
	Bring the TE/BE throttle to O	·
	Switch off the VCB	checkes ob
	• FB contactor 8.1must open.	
	FB discharging contactor 8.41	•
	must close	
	Check the filter current in	
	diagnostic laptop	
Test earth fault	Make a connection between wire	***
detection harmonic	no. 12 and vehicle body. Start up	
filter circuit.	the loco. Close VCB.	
	• Earth fault relay 89.6 must pick up.	Ch ceked ok
	Diagnostic message comes that -	
	Earth fault in harmonic filter circuit	
Test traction motor	Traction converter manufacturer	
speed sensors for	to declare the successful operation	ole
both bogie in both	and demonstrate the same to the	3 (4
cabs	supervisor/ PLW	

5.9 Test important components of the locomotive

Items to be tested	Description of the test	Monitored value/remarks	
Speedometer	VCU converter manufacturer to declare the successful operation and demonstrate the same to the supervisor/ PLW	Checked ale	
Time delay module of MR blower	The time after which the starting capacitor for MR blower should go off the circuit should be set to 10-12 seconds	cheeked ob	
Ni-Cd battery voltage	At full charge, the battery voltage should be 110V DC.	uncued de	
Flasher light	From both cab flasher light should blink at least 65 times in one minute.	Checked ok	
Head light	Head light should glow from both cabs by operating ZLPRD. Dimmer operation of headlight should also occur by operating the switch ZLPRD.	Checked ok	

Effective Date: Feb 2022

Doc.No.F/ECS/01 (Ref: WI/ECS/10)

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42.51

Type of Locomotive: WAP-7/WAG-9HC

Page: 25 of 27

		•
Marker light	Both front and tail marker light should glow from both the cabs	Checked ok
Cab Light	Cab light should glow in both the cabs by operating the switch ZLC	cheekedok
Spot lights	Both Drivers and Asst. Drivers Spot light should glow in both cabs by operating ZLDD	Cheeked ob Cheeked ob
Instrument lights	Instrument light should glow from both cab by operating the switch ZLI	Checkes Gle
Illuminated Push button	All illuminated push buttons should glow during the operation	checked ok
Contact pressure of the high rating contactors	The contact pressure of FB contactors (8.1, 8.2) is to be measured Criteria: The minimum contact pressure is 54 to 66 Newton.	For contactor 8.1: For contactor 8.2:
Crew Fan	All crew fans should work properly when VCB of the loco is switched on. The airflow from each cab fan is to be measured. Criteria: The minimum flow of air of cab fan should be 25 m³/minute	Cab 1 LHS: Cab 1 RHS: Cab 2 LHS: Cab 2 RHS:

6.0 Running Trial of the locomotive

SN	Description of the items to Action which should take place seen during trail run		Remarks	
1	Cab activation in driving mode	No fault message should appear on the diagnostic panel of the loco.	Checkos	
	Loco charging	Loco to be charged and all auxiliaries should run. No fault message to appear on the diagnostic panel of the loco. Raise MR pressure to 10 Kg/cm ² , BP to 5 Kg/cm ² , FP to 6 Kg/cm ² .	Checkes	
3,	Check function of Emergency push stop.	This switch is active only in activated cab. By pushing this switch VCB should open & pantograph should be lowered.	Othersel	
4.	Check function of BPCS.	 Beyond 5 kmph, press BPCS, the speed of loco should be constant. BPCS action should be cancelled by moving TE/BE throttle, by dropping BP below 4.75 Kg/cm², by pressing BPCS again. 	Checkad	
5.	Check train parting operation of the Locomotive.	Operate the emergency cock to drop the BP Pressure LSAF should glow.	chedre	

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42.51

Type of Locomotive: WAP-7/WAG-9HC

Page: 26 of 27

6.	Check vigilance	Set the speed more than 1.5 kmph and ensure that
	operation of the	brakes are released i.e. BC < 1 Kg/cm ² .
	locomotive	For 60 seconds do not press vigilance foot switch or
		sanding foots switch or TE/BE throttle or BPVG
		switch then
	!	Buzzer should start buzzing.
		LSVW should glow continuously.
		Do not acknowledge the alarm through BPVG or Checked 6 k
	·	vigilance foot switch further for 8 seconds then:
		Emergency brake should be applied
		automatically.
		VCB should be switched off.
		Resetting of this penalty brake is possible only after
		32 seconds by bringing TE/BE throttle to 0 and
		acknowledge BPVR and press & release vigilance
		foot switch.
7.	Check start/run interlock	• At low pressure of MR (< 5.6 Kg/cm ²). Cheele ed of
		• With park brake in applied condition. ————————————————————————————————————
		• With direct loco brake applied (BP< 4.75Kg/cm ²).
		• With automatic train brake applied (BP<4.75Kg/cm ²).
		• With emergency cock (BP < 4.75 Kg/cm ²).
8.	Check traction interlock	Switch of the brake electronics. The
		Tractive /Braking effort should ramp down, VCB
		should open and BP reduces rapidly.
9.	Check regenerative	Bring the TE/BE throttle to BE side. Loco speed Checkedo.
40	braking.	should start reducing.
10.	Check for BUR	In the event of failure of one BUR, rest of the two
	redundancy test at	BURS can take the load of all the auxiliaries. For this
	ventilation level 1 & 3 of	Switch on one bott.
	loco operation	Auxiliaries should be catered by rest of two BURs.
- 11		Switch off the 2 BURs; loco should trip in this case.
11.	Check the power	Create disturbance in power converter by switching
	converter	off the electronics. VCB should open and converter Cheeked of
	isolation test	should get isolated and traction is possible with
		another power converter.

PATIALA LOCOMOTIVE WORKS, PATIALA

<u>Testing & Commissioning Format For 3-Phase Locomotive fitted with</u>
<u>IGBT based Traction Converter, Auxiliary Converter and TCN based VCU</u>

Locomotive No.: 42051

Type of Locomotive: WAP-7/WAG-9HC

Page: 27 of 27

7.0 Final check list to be verified at the time of Loco dispatch

Condition /Operations of the following items are to be checked:

SN	Item	Cab-1	Cab-2	Remarks
1	Head lights	olc	ok \	
2	Marker Red	ole	ok	
3	Marker White	OK	ok	i · · · · ·
. 4	Cab Lights	ok	ok /	•
5	Dr Spot Light	OK	ok	
6	Asst Dr Spot Light	OK	Ole	enecked ox
7	Flasher Light	Øk.	ok	
8	Instrument Lights	ok	ok	
9	Corridor Light	ok	OK	
10	Cab Fans	Ok	Gli	:
11	Cab Heater/Blowers	ok	OK	
12	All Cab Signal Lamps Panel 'A'	el.	64	

Status of RDSO modifications

LOCO NO: 42051

Sn	Modification No.	Description	Remarks
1.	RDSO/2008/EL/MS/0357 Rev.'0' Dt 20.02.08	Modification in control circuit of Flasher Light and Head Light of three phase electric locomotives.	Øk/Not Ok
2.	RDSO/2009/EL/MS/0377 Rev.'0' Dt 22.04.09	Modification to voltage sensing circuit in electric locomotives.	Øk/Not Ok
3.	RDSO/2010/EL/MS/0390 Rev.'0' Dt 31.12.10	Paralleling of interlocks of EP contactors and Relays of three phase locomotives to improve reliability.	. √k/Not Ok
4.	RDSO/2011/EL/MS/0399 Rev.'0' Dt 08.08.11	Removal of interlocks of control circuit contactors no. 126 from MCPA circuit.	OK/Not Ok
5.	RDSO/2011/EL/MS/0400 Rev.'0' Dt 10.08.11	Modification sheet for shifting the termination of \$GKW, 1.8 KV, 70 sq mm cables and 2x2.5 sq mm cables housed in lower portion of HB2 panel and provision of Synthetic resin bonded glass fiber sheet for three phase locomotives.	.Øk/Not Ok
6.	RDSO/2011/EL/MS/0401 Rev.'0' Dt 10.08.11	Modification sheet for relaying of cables in HB-2 panel of three phase locomotives to avoid fire hazards.	9k/Not Ok
7.	RDSO/2011/EL/MS/0403 Rev.'0' Dt 30.11.11	Auto switching of machine room/corridor lights to avoid draining of batteries in three phase electric locomotives.	Øk/Not Ok
8.	RDSO/2012/EL/MS/0408 Rev.'0'	Modification of terminal connection of heater cum blower assembly.	,9k/Not Ok
9.	RDSO/2012/EL/MS/0411 Rev.'1' dated 02.11.12	Modification sheet to avoid simultaneous switching ON of White and Red marker light in three phase electric locomotives.	9k/Not Ok
10	RDSO/2012/EL/MS/0413 Rev.'1' Dt 25.04.16	Paralleling of interlocks of EP contactors and auxiliary contactors of three phase locomotives to improve reliability.	OK/Not Ok
11	RDSO/2012/EL/MS/0419 Rev.'0' Dt 20.12.12	Modification sheet to provide rubber sealing gasket in Master Controller of three phase locomotives.	⊘ k/Not Ok
12	RDSO/2013/EL/MS/0420 Rev.'0' Dt 23.01.13	Modification sheet to provide mechanical locking arrangement in Primary Over Current Relay of three phase locomotives.	,OK/Not Ok
13	RDSO/2013/EL/MS/0425 Rev.'0' Dt 22.05.13	Modification sheet for improving illumination of head light in dimmer mode in three phase electric locomotives.	OK/Not Ok
14	RDSO/2013/EL/MS/0426 Rev.'0' Dt 18.07.13	Modification sheet of Bogie isolation rotary switch in three phase electric locomotives.	Øk/Not Ok
15	RDSO/2013/EL/MS/0427 Rev.'0' Dt 23.10.13	Modification sheet for MCP control in three phase electric locomotives.	OK/Not Ok
16	RDSO/2013/EL/MS/0428 Rev.'0' Dt 10.12.13	Modification sheet for relocation of earth fault relays for harmonic filter and hotel load along with its resistors in three phase electric locomotives.	Øk/Not Ok
17	RDSO/2014/EL/MS/0432 Rev.'0' Dt 12.03.14	Removal of shorting link provided at c-d terminal of over current relay of three phase electric locomotives.	Øk/Not Ok
18	RDSO/2017/EL/MS/0464 Rev.'0' Dt 25.09.17	Provision of Auxiliary interlock for monitoring of Harmonic filter ON (8.1)/adoption (8.2) Contactor in GTO/IGBT locomotives.	O∕kî/Not Ok
19	RDSO/2017/EL/MS/0467 Rev.'0' Dt 07.12.17	Modification in blocking diodes to improve reliability in three phase electric locomotives.	Øk/Not Ok
20	RDSO/2018/EL/MS/0475 Rev.'0'	Modification in existing Control Electronics (CE) resetting scheme of 3 phase electric locomotives.	Øk/Not Ok
21	RDSO/2019/EL/MS/0477 Rev.'0' Dt 18.09.19	Implementation of push pull scheme.	Øk/Not Ok
22	RDSO/2024/EL/MS/0500 Rev '0' Dt. 13.09.2024	Recording of Flasher light operation either due to fault or manually by Loco Pilot in case of emergency with time stamping in VCU of 3-phase Electric Locomotives.	Øk/Not Ok
23	RDSO/2024/EL/MS/0502 Rev '0' Dt 10.10.2024	Unloader valve control circuit modification in three Phase Electric Locomotives.	, Ok/Not Ok
24	RDSO/2024/EL/MS/0503 Rev '0' Dt 17.09.2024	Paralleling of interlocks of control circuit contactor to improve reliability of three phase electric locomotives	√k/Not Ok
25	RDSO/2024/EL/MS/0504 Rev '0' Dt 21.11.2024	Isolation of Harmonic Filter from 3-phase locomotives fitted with M/s Alstom (BTIPL), CGPISL and Medha make IGBT based Propulsion Equipment	øk/Not Ok

Signature of JE/SSE/ECS

Loco No.: 42051

PLW/PATIALA

PNEUMATIC TEST PARAMETERS OF 3-PHASE ELECTRIC LOCOMOTIVES

(As per DG/RDSO/LKO's letter No.-EL/3.2.19/3phase, dated-29.03.2012)

SN	Parameters	Reference	Value	Result
	Brake Panel: M/s Faiveley			
1.0	Auxiliary Air supply system (Pantograph & VCB)			
1.1	Ensure, Air is completely vented from pantograph			0
	Reservoir (Ensure Panto gauge reading is Zero)			
1.2	Turn On BL Key. Now MCPA starts.		60 sec. (Max.)	59 Sec
	Record pressure Build up time (8.0 kg/cm2)			
1.3	Auxiliary compressor safety Valve 23F setting	Faiveley Doc. No.	8.5±0.25kg/cm2	8.55 Kg/cm2
		DMTS-014-1, 8 CLW's	-	
		check sheet no.		
		F60.812 Version 2		
1.4	Check VCB Pressure Switch Setting	CLW's check sheet	Opens 4.5±0.15	4.55 Kg/cm2
		no. F60.812 Version 2	kg/cm2, closes	
4.5			5.5±0.15 kg/cm2	5.55 Kg/cm2
1.5	Set pantograph Selector Switch is in Auto, Open pan-1&2 Is	solating Cocks & KABA co		-
1.6	Set Cab-1 Pan UP in Panel A.		Observed Pan-2	ОК
4.7	Class Barr 2 isolation Coale		Rises.	01/
1.7	Close Pan-2 isolating Cock Open Pan -2 isolating Cock		Panto-2 Falls Down Panto-2 Rises	OK
1.8	Record Pantograph Rise time		06 to 10 seconds	8 Sec
1.9	Record Pantograph Lowering Time		06 to 10 seconds	9 Sec
1.10	Panto line air leakage		0.7 kg/cm2 in 5	0.10 kg/cm2
1.10	ranto inte an teakage		Min.	in 5 Min.
1.11	High Reach Panto emergency test and reset.		IVIIII.	ok
2.0	Main Air Supply System			- OK
2.1	Ensure, Air is completely vented from locomotive. Drain	Theoretical		
2.1	out all the reservoirs by opening the drain cocks and then	calculation and		
	closed drain cocks. MR air pressure build up time by each	test performed by		
	compressor from 0 to 10 kg/cm2.	Railways.		
	i) with 1750 LPM compressor	,	i) 7 mins Max.	6 min. & 45
	ii) with 1450 LPM compressor		ii) 8.5 mins Max.	Sec.
2.2	Drain air below MR 8 kg/cm2 to start both the		Check Starting of	ok
	compressors		both compressors	
2.3	Drain air from main reservoir up to 7 kg/cm2. Start		30 Sec. (Max)	CP1-28 Sec
	compressors, Check pressure build time of individual			
	compressor from 8 kg/cm2 to 9 kg/cm2			CP2-29 Sec
2.4	Check Low MR Pressure Switch Setting (37)	D&M test spec.	Closes at 6.40±0.15	6.50 Kg/cm2
		MM3882 &	kg/cm2 Opens at	
		MM3946	5.60±0.15kg/cm2	5.65 Kg/cm2
2.5	Check compressor Pressure Switch RGCP setting (35)	D&M test spec.	Opens at 10±0.20	10 Kg/cm2
		MM3882 &	kg/cm2, Closes	
		MM3946	at 8±0.2kg/cm2	8 Kg/cm2
2.6	Run both the compressors Record Pressure build up time	Trial results	3.5 Minutes Max.	3.45 minute

PLW/PATIALA

Loco No.: 42051

2.8 Check Auto Drain Valve functioning (124 & 87)	2.7	Check unloader val	ve operation				OK/Not OK	ОК
Direct by BLCP	2.8						Compressor	-
	2.9			· · · · · · · · · · · · · · · · · · ·			11.5 Kg/cm2	
valve to reset at pressure 1.2 kg/cm2 less than opening pressure. 2.12 BP Pressure: Switch 'OFF' compressor, Drain MR Pressure by drain cock of 1" Main Reservoir, Start Compressor, check setting pressure of Duplex Check Valve 92F. 2.13 FP pressure: FF pressure: FF pressure: FF pressure: FF pressure in Gauge. 3.0 Air Dryer Operation 3.1 Open Drain Cock 90 of 2"d MR to start Compressor, leave open for Test Check Air Dryer Towers to change. 3.2 Check Purge Air Stops from Air Dryer at Compressor stops 3.3 Check condition of humidity indicator 4.0 Main Reservoir Leakage Test 4.1 Put 10 Brake (A-9) in full service, Check MR Pressure air leakage from both cabs. Check BP Air leakage (isolate BP charging cock-70) Brake Test (Automatic Brake operation) 5.1 Record Brake Pipe & Brake Cylinder pressure at Each Step Check proportionality of Auto Brake system CLW's check sheet no. F60.812 Version 2 CLW's check sheet no. F60.812 Version 2 Tower to change every minute Tower to change every minute Blue Blue Blue Blue Blue Blue Blue Blue Blue Check BP Air leakage (isolate BP charging cock-70) D&M test spec. MM3882 & MM3946 M3882 & MM3946 Check BP Air leakage (isolate BP charging cock-70) D&M test spec. MM3882 & MM3946 Should be less than 1 kg/cm2 in 15 minutes Minutes 5.0 Brake Test (Automatic Brake operation) F60.812 Version 2 CLW's check sheet no. F60.812 Version 2 Cleck proportionality of Auto Brake system CLW's check sheet no. F60.812 Version 2 CLW's check sheet n	2.10	direct by BLCP			MM3882	& MM3946		11.5 Kg/cm2
by drain cock of 1" Main Reservoir, Start Compressor, check setting pressure of Duplex Check Valve 92F. 2.13 FP pressure:	2.11	valve to reset at pro						
Pr pressure:	2.12	by drain cock of 1"	Main Reservoir, Sta	rt Compressor,			5.0±0.10kg/cm2	5.0 Kg/cm2
3.1 Open Drain Cock 90 of 2 nd MR to start Compressor, leave open for Test Check Air Dryer Towers to change. 3.2 Check Purge Air Stops from Air Dryer at Compressor stops 3.3 Check condition of humidity indicator 4.0 Main Reservoir Leakage Test 4.1 Put Auto Brake (A-9) in full service, Check MR Pressure air leakage from both cabs. 4.2 Check BP Air leakage (isolate BP charging cock-70) Brake Test (Automatic Brake operation) 5.0 Brake Test (Automatic Brake operation) Check proportionality of Auto Brake system Clw's check sheet no. F60.812 Version 2 Auto controller position BP Pressure kg/cm2 BC (WAG-9 & WAP-7) Kg/cm2 BC (WAG-9 & WAP-7) Kg/cm2 Auto controller Result Value Result Value Result Value Result Value Result Value Result Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30	2.13	FP pressure: Fit Test Gauge in Te	est point 107F FPTP.				6.0±0.20kg/cm2	
Open for Test Check Air Dryer Towers to change. Every minute	3.0	Air Dryer Operati	ion					
3.3 Check condition of humidity indicator Blue Blue	3.1	·		• •				ok
Main Reservoir Leakage Test	3.2	Check Purge Air Sto	ps from Air Dryer at	t Compressor stops				
A.1	3.3						Blue	Blue
leakage from both cabs.	4.0	Main Reservoir Lea	akage Test					
MM3882 & MM3946 minutes Kg/cm2 in 5 minutes	4.1	Put Auto Brake (A-9) in full service, Check MR Pressure air		1		than 1 kg/cm2 in	in 15	
Check proportionality of Auto Brake system	4.2	Check BP Air leakag	ge (isolate BP chargii	ng cock-70)	<u> </u>		_	Kg/cm2 in 5
Check proportionality of Auto Brake system	5.0	Brake Test (Auto	matic Brake opera	ation)				
Auto controller position BP Pressure kg/cm2 BC (WAG-9 & WAP-7) BC (WAP-5) Kg/cm2 Kg/cm2 Kg/cm2 Kg/cm2 Kg/cm2 Kg/cm2 Result Value Result Value Result Value Result Run 5±0.1 5.0 Kg/cm2 0.00 0.00 Kg/cm2 0.00 - Intial 4.60±0.1 4.6 Kg/cm2 0.40±0.1 0.40Kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5 Kg/cm2 5.15±0.30 - Interpretation 4.50±0.20 4.50±0	5.1							
position Kg/cm2 Kg/cm2 Value Result Value Result Run 5±0.1 5.0 Kg/cm2 0.00 0.00 Kg/cm2 0.00 Intial 4.60±0.1 4.6 Kg/cm2 0.40±0.1 0.40Kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30 -		Check proportional	ity of Auto Brake sy	- I				
Run 5±0.1 5.0 Kg/cm2 0.00 0.00 Kg/cm2 0.00 - Intial 4.60±0.1 4.6 Kg/cm2 0.40±0.1 0.40Kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30 -			BP Pressure kg/cm	n2	1		, ,	
Intial 4.60±0.1 4.6 Kg/cm2 0.40±0.1 0.40Kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30 -			Value	Result	Value	Result	Value	Result
Intial 4.60±0.1 4.6 kg/cm2 0.40±0.1 0.40kg/cm2 0.75±0.15 - Full service 3.35±0.2 3.4 kg/cm2 2.50±0.1 2.5kg/cm2 5.15±0.30 -		Run	5±0.1	5.0 Kg/cm2	0.00	0.00 Kg/ cm2	0.00	-
English 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		Intial	4.60±0.1	4.6 Kg/cm2	0.40±0.1		0.75±0.15	-
Emergency Less than 0.3 0.2 Kg/cm2 2.50±0.1 2.5Kg/cm2 5.15±0.30 -		Full service	3.35±0.2	3.4 Kg/cm2	2.50±0.1	2.5Kg/ cm2	5.15±0.30	-
<u> </u>		Emergency	Less than 0.3	0.2 Kg/cm2	2.50±0.1	2.5Kg/ cm2	5.15±0.30	

PLW/PATIALA

Loco No.: 42051

5.2	Record time to BP pressure drop to 3.5 kg/cm2 Ensure	D&M test spec.	8±2 sec.	9 Sec
	Automatic Brake Controller handle is Full Service from Run	MM3882 & MM3946		
5.3	Operate Asst. Driver Emergency Cock,	D&M test spec.	BP pressure falls	
		MM3882 & MM3946	to Below 2.5	OK
		011111	kg/cm2	4.00
5.4	Check brake Pipe Pressure Switch 69F operates	CLW's check sheet no.	Closes at BP	4.30
		F60.812 Version 2	4.05- 4.35	Kg/cm2
			kg/cm2	
			Opens at BP	2.05
			2.85- 3.15	3.05
	Maria Arita Braha Cantrallar handla franc Braning to	DOM took once	kg/cm2	Kg/cm2
5.5	Move Auto Brake Controller handle from Running to	D&M test spec.		
	Emergency BC filling time from 0.4 kg/cm2 i.e. 95% of	MM3882 & MM3946		
	Max. BC developed		4±1 sec.	
	WAP5 – BC 5.15 ± 0.3 kg/cm2 apply time		7.5±1.5 sec.	
	WAP7 - BC 2.50 ± 0.1 kg/cm2			20 Sec.
5.6	WAG9 - BC 2.50 ± 0.1 kg/cm2 Move Auto Brake Controller handle to full service and	D&M test spec.	21±3 sec.	
5.6		MM3882 & MM3946		
	BP pressure 3.5 kg/cm2. Move Brake controller to	IVIIVI3882 & IVIIVI3946		
	Running position BC Release time to fall BC Pressure up			
	to 0.4 kg/cm2 i.e. 95% of Max. BC developed BC release Time			
	WAP7		17.5±25 sec.	
	WAG9		17.5±25 sec.	55 sec.
5.7	Move Auto Brake Controller handle to Release, Check	CLW's check sheet no.	60 to 80 Sec.	79 Sec.
5.7	·	F60.812 Version 2	60 to 80 sec.	79 Sec
г о	BP Pressure Steady at 5.5± 0.2 kg/cm2 time. Auto Brake capacity test: The capacity of the A9 valve		DD management	
5.8	in released condition must conform to certain limit in	RDSO Motive power	BP pressure should not fall	
		Directorate report no.		
	order to ensure compensation for air leakage in the	MP Guide No. 11 July, 1999 Rev.1	below 4.0 kg/cm2 with in	4.5
	train without interfering with the automatic functioning of brake.	1999 Kev.1	60 Sec.	4.5 Kg/cm2
	_		60 Sec.	Ng/CIIIZ
	* Allow The MR pressure to build up to maximum stipulated limit.			
	* Close brake pipe angle cock and charge brake pipe to			
	5 kg/cm2 by A-9 (Automatic brake controlling) at run			
	position.			
	* Couple 7.5 dia leak hole to the brake hose pipe of			
	locomotive. Open the angle cock for brake pipe.			
	The test shall be carried out with all the compressors in			
	working condition.			
5.9	Keep Auto Brake Controller (A-9) in Full Service. Press		BC comes to '0'	0
5.5	Driver End paddle Switch (PVEF)		De comes to 0	
6.0	Direct Brake (SA-9)			
6.1	Apply Direct Brake in Full Check BC pressure			
0.1	WAG9/WAP7	CLW's check sheet no.	3.5±0.20 kg/cm2	3.6
	WAG9/WAP7	F60.812 Version 2	5.15±0.3 kg/cm2	Kg/cm2
6.2			8 sec. (Max.)	8 Sec
0.2	Apply Direct Brake, Record Brake Cylinder charging	D&M test spec. MM3882 & MM3946	o Sec. (IVIdX.)	0 360
	time	1V11V13882 & 1V11V13946	1	

PLW/PATIALA

Loco No.: 42051

6.3	Check Direct Brake Pressure switch 59 (F)	D&M test spec. MM3882 & MM3946	0.2.±0.1 kg/cm2	0.25 kg/cm2	
6.4	Release direct brake & BC Release time to fall BC pressure up to 0.4 kg/cm2		10 -15 Sec.	13 Sec	
7.0	Modified System Software (only for CCB)		-NA-	-NA-	
7.1	Bail-off de-activated during emergency by any means	_			
7.2	DPWCS and Non-DPWCS mode enabled	-	Multi Loco		
7.3	TCAS and Non-TCAS mode enabled	-	Not Yet Launched	Presently	
7.4	Penalty brake application deactivated for Fault code 113 (FC 113) and CCB health signal will not drop to avoid loco detention/failure. The Brake Electronics Failure "message will not generate on DDS.	RDSO letter no.	Pressure Setting Needed is12 kg/sqcm causing mismatching with standard Pr Setting	not happening in PLW	
7.5	CCB health signal logic revised (Now will remain high) for penalty condition occurring with FC 108 due to wrong operation/not affecting operation/ Not a CCB Fault (i.e Both controllers selected as LEAD etc) The Brake electronic failure message will not generate on DDS	EL/3.2.19/3-phase (CCB), dtd 30.01.2023	-NA-	-NA-	
7.6	CCB health signal logic for FC 102 (In case of BC request from VCU is more than 90 %-above 9V DC) is changed i.e CCB health signal will not drop for FC 102 which will avoid loco detention/failure. The brake electronic failure message will not generate on DDS.		Could not performed by M/s Knorr	Presently Not happening in PLW	
7.7	Booting time for CCB with TCAS/TPM/PTWS/DPWCS mode 15-20 sec. However, in case of absence of either one or both system booting time subsequently increased to 40-50 sec.		-NA-	-NA-	
8.0	Sanding Equipment				
8.1	Check Isolating Cock-134F is in open position. Press sander paddle Switch. (To confirm EP valves Operates)		Sand on Rail	Ok	
9.0	Test Vigilance equipment : As per D&M test specification			Ok	

Signature of SSE/Shop

	42051						
	ROOF COMPONENT CAB 1 & 2						
S.No.	Description	PL NO.	QPL /Nos.	Supplier	Sr. no.		
1	Pantograph	29880014(HR), 29880026	2	FAIVELEY, CONTRANSYS	C25-1257/MAR-2024, 14876-07/24		
2	Servo motor	29880026	2	CONTRANSYS	16513-04/25		
3	Air Intake filter Assly	29480103	2	Trident	VFO/R/742/11/2024, VFO/R/872/02/2025		
4	Insulator Panto Mtg.	29810127	8	BHEL / MIL	12-2024 / 03-2025, 04-2025		
	1			OF COMPONENT			
5	High Voltage Bushing	29731021	1	ELECTRANEX	EIPL-5975-01-25		
6	Voltage Transformer	29695028	1	CG POWER & INDUSTRIAL	243386-2025		
7	Vacuum Circuit Breaker	25712202	1	Autometers	AALN/06/2025/129/VCBA/359		
8	Insulator Roof line	29810139	9	MIL	02-2025, 02-2025		
9	Harmonic Filter	29650033	1	Sure	809817-10	AS Per PO/IRS Conditions	
10	Earth Switch	29700073	1	Patra & Chanda	298-09/2024		
11	Surge Arrester	29750052	2	CG POWER & INDUSTRIAL	58928-2024, 58931-2024		
	Air Brake Components						
12	Air Compressor (A,B)	29511008	2	ELGI	EXGS 923594 A, EXGS 923587 B		
13	Air Dryer	29162051	1	TRIDENT	LD2-05-1962-25		
14	Babby compressor	25513000	1	CEC	RB 5019-02-25		
15	Air Brake Panel	29180016	1	FAIVELEY	MAR 2505-WAG 9-3991		
16	Contoller (A,B)	29180016	2	FAIVELEY	K 24-055 A, K 24-069 B		
17	Breakup Valve	29180016	2	FAIVELEY			
18	wiper motor	29162026	4	AUTO INDUSTRY			

भी. एत. डब्ल्यू P.L.W

PLW/PTA

ELECTRIC LOCO HISTORY SHEET (ECS)

ELECTRIC LOCO NO: 42051 LIST OF ITEMS FITTED BY ECS **RLY: NERR**

SHED: MLDD

PROPULSION SYSTEM: ALSTOM

SN	DESCRIPTION OF ITEM	ITEM PL NO.	ITEM SR. NO CAB-1/CAB-2		MAKE/SUPPLIER	
1	LED Based Flasher Light Cab I & II	29612937	4762	4691	POWER TECH	
2	Led Marker Light Cab I & II	29612925	10425/10426/1	10425/10426/10341/10345		
3	Cab Heater Cab I & II	29170011	2879	2876	TOPGRIP	
4	Crew Fan Cab I & II	29470080	RT07680125/8380125/8130125/8320125		ROTO TECH	
5	Master Controller Cab I	29860015	MCG264		AAL	
6	Master Controller Cab II	29000015	MCG177			
7	Complete Panel A Cab I & II	29178265	177	138	KONTACT	
8	Complete Panel C Cab I & II	29170539	3806	3742	KEPCO/ALSTOM	
9	Complete Panel D Cab I & II	29178265	162	160	KONTACT	
10	Complete Cubicle- F Panel Cab I & II	29178162	CF2024L0274-907A	CF2024L0274-907B	HIND	
11	Speed Ind.& Rec. System	29200040	M-2412502/S-2412502		AAL	
12	Battery (Ni- Cd)	29680025	B-105		HBL	
13	Set of Harnessed Cable Complete	29600420			POLYCAB	
14	Transformer Oil Pressure Sensor (Cab-1) (Pressure Sensor Oil Circuit Transformer)	29500047	1833 Feb25	1881 Feb25	BG INDUSTRIES	
15	Transformer Oil Pressure Sensor (Cab-2)		1845 Feb25	1860 Feb25		
16	Transformer Oil Temperature Sensor (Cab-1) (Temperature Sensor Oil Circuit Transformer)	29500035	BG/TFP/9002 Aug-24		BG INDUSTRIES	
17	Transformer Oil Temperature Sensor (Cab-2)		BG/TFP/8743 Aug-24			
18	Roof mounted Air Conditioner I	29811028	SSM/CLW/AC/03-25/163		SSM	
19	Roof mounted Air Conditioner II	29011020	SSM/CLW/AC/04-25/158			
20	DPWCS (DDU)		1447	1448	LOTUS	

SSE/JE/Roof &U/F

SSE/JE/Machine Room

SSE/JE/TEST ROOM

SSE/JE/Harness

			MOTIVE WORKS, PATIALA 51/WAG-9HC/NFR/MLDD			
S.No.	Equipment	PL No.	Equipment Se	rial No.	Ma	ike
1	Complete Shell Assembly with piping	29171027	Sr.19/171, 06		CHANDRA UDYOG	
2	Side Buffer Assly Both Side Cab I		155, 04/25	NA, 04/25	AEU	AEU
3	Side Buffer Assly Both Side Cab II	29130050	30, 03/25	NA, 04/25	AEU	, AEU
		20120027			•	-
4	CBC Cab I & II	29130037	92, 03/25	306, 02/25	FASP	FASP
5	Hand Brake		18596 -2/25		MECHWEL S	3SI UNIT
6	Set of Secondry Helical Spring	29045034 29041041			GI	3D
7	Battery Boxes (both side)	29680013	175, 03/25	158, 03/25	BHARTIA BRIGHT	BHARTIA BRIGH
8	Traction Bar Bogie I		8904, 04/	25	KI	M .
9	Traction Bar Bogie II		8884, 04/	25	KI	M
10	Centre Pivot Housing in Shell Bogie I side	29100057	035, 02/2	25	. E\	/E
11	Centre Pivot Housing in Shell Bogie 🐧 side	25100057	042, 02/2	25	E/	/E
12	Elastic Ring in Front in Shell Bogie I side	29100010	2819, 01/	25	ava	ıdh
13	Elastic Ring in Front in Shell Bogie II side	25100010	2874, 01/	25 .	Ava	adh
14	Main Transformer	29731008 for WAG 9 29731057 for WAP-7	CG-65-03-25-LT10	05/1, 2025	С	G .
15	Oil Cooling Radiator I		03/25, P0325	RC2789	FINE AUTOMOTIVE	
16	Oil Cooling Radiator II	29470031	03/25, P0325	RC2807	FINE AUTOMOTIVE	
17	Main Compressor I with Motor		EXGS923587,	10/24	ELGi	
18	Main Compressor II with Motor	29511008	EXGS923594,		ELGi	
19	Transformer Oil Cooling Pump I		2412DC4113		FLOWOIL	
20	Transformer Oil Cooling Pump II		2412DC4103, 2024		FLO	
21	Oil Cooling Blower OCB I			03/25, 325034022 , 32503AF4022		INI
22		29470043	03/25, 325034025,			
	Oil Cooling Blower OCB II TM Blower I				·	INI
23		29440075	03/25, AC-61117 CGLYCAM-23065			CEL
24	TM Blower II		03/25, AC -61086 CGLY dq M-0945			CEL
25	Machine Room Blower I	29440105	04/25, AC-61425 CGI		ACCEL	
26	Machine Room Blower II		05/25, D42-6324, N	NF42/D 6413	SAMAL	HARAND
27	Machine Room Scavenging Blower I	29440129	03/25, SM-25	.03.05	GTR .	
28	Machine Room Scavenging Blower II	29440129	03/25, SM-25	.03.21	GTR	
29	TM Scavenging Blower Motor I		05/25, 25P1315/22,	25P1315AF22	SAINI	
30	TM Scavenging Blower Motor II	29440117	05/25, 25P1315/17,	25P1315AF17	SA	INI
31	Traction Convertor I		2024, ATIL/11/2024/53/PR			
32	Traction Convertor II		2024, ATIL/11/2024/53/PR			
33	Vehicle Control Unit I	20741075	2024, ATIL/11/2024/53/PR	OPULSION-A / 4225		D.D.
34	Vehicle Control Unit II	29741075	2024, ATIL/11/2024/53/PR	OPULSION-A / 4226]	3B
35	Aux. Converter Box I (BUR 1)		02/25, 2025B/1025			
36	Aux. Converter Box 2 (BUR 2 + 3)		02/25, 2025B/1025			
37	Axillary Control Cubical HB-1	29171180	04/25, SLHB100		-	ALIT
38	Axillary Control Cubical HB-2	29171192	07/24, HB2/2025/			CTIFIERS
39	Complete Control Cubicle SB-1	29171209	10/24, AALN/10/2024			METERS
40	Complete Control Cubicle SB-2	29171210	01/25,2501	1815	TRC	DLEX
41	Filter Cubical (FB) (COMPLETE FILTER CUBICLES)	29480140	08/24, FB/2025/E			CTIFIERS
42	Driver Seats	29171131	4/25- 185, 203		TARU	IDEEP
43	Transformer oil steel pipes	29230044	RANSA	L		4
44	Conservator Tank Breather	29731057	24-17942, 24-		YOU	GYA
45	Ballast Assembly (only for WAG-9)	29170163	1.69,169	11/1/20	Al	M
46	Head Light					

NAME CHURNAS HARM SSE/LAS

NAME ANKIT OFFAL JE/LAS/UF

Rayl NAME Rayindria Meas JE/LAS

Issue No.: 05 Effective Date: July-2023

DOC NO: F/LAS/Electric Loco CHECK SHEET (Ref: WI/LAS/Elect/01, 02, 03 & 04 & QPL/LAS/Elect. Loco)

Page 1 of 1

पटियाला रेलइंजन कारखाना, पटियाला PATIALA LOCOMOTIVE WORKS, PATIALA **ELECTRIC LOCO CHECK SHEET**

LOCO NO: 42051

Rly: NFR

Shed: MLDD *

S. No.	ITEM TO BE CHECKED	Specified Value		served \	/alue	
1.1	Check proper Fitment of Hotel Load Converter & its output contactor.	OK		ATH		
1.2	Check proper Fitment of MR Blower 1 & 2, MR Scavenging Blower 1 & 2, TM Blower 1 & 2, TMB Scavenging Blower 1 & 2. TM scavenging blower 1 & 2 & Oil Cooling unit.	ОК		ok		
1.3	Check proper of Fitment of oil cooling unit (OCU).	OK		OK		
1.4	Check proper Fitment of HB 1 & 2 and its respected lower part on its position.	OK		OK		
1.5	Check proper Fitment of FB panel on its position.	OK		OK		
1.6	Check proper Fitment of assembled SB1 & SB2 panel.	OK		OK		
1.7	Check proper Fitment of Auxiliary converter 1, 2 & 3-(BUR-1, 2 & 3).	OK		OK		
1.8	Check proper Fitment of Traction converter 1 & 2 (SR-1 & 2).	OK				
1.9	Check proper fitment, torquing & Locking of Main Transformer bolt.	OK				
1.10	Check proper fitment of Main compressor both side with the compressor safety wire rope.	OK .				
1.11	Check proper resting of Secondary Helical Springs between Bogie & Shell body.	OK				
1.12	Check proper fitment of Bogie Body Safety Chains.	. OK		0/4		
1.13	Check proper fitment of Cow catcher.	OK				
1.14.	Check coolant level in SR 1 & 2 Expansion Tank.	OK .				
1.15	Check Transformer Oil Level in both conservators Tank (Breather Tank).	OK	OK			
1.16	Check proper fitment and maintain required gaps from Loco Shell Body of all metallic pipes to avoid any damage during online working of Locomotives.	OK	OK			
1.17	Check proper fitment of both battery box.	OK		OK		
1.18	Check for any gap between Main Transformer mounting base & Loco Shell.	OK		OK		
1.19	Check proper fitment of Push Pull rod its bolt torquing and fitment of fixing cable. As per Drg No 1209-01-113-001	OK		OK		
	Secondary Vertical and Lateral Clearance on leveled track at the time of Loco Dispatch.		CAE	3-1	CAB-2	
1.20	ELRS/TC/ 0082 (Rev 1) dated 17.09.2015	Vertical-Std :35-60 mm				
		Lateral Std- 45-50 mm	54		1	
	Buffer height: Range (1090, +15,-5)	1085-1105		L/S	R/S	
1.21	Drg No IB031-02002.	mm	OK O	1095		
			REAR	-		
1.22	Buffer Length: Range (641 mm + 3 to 10 mm with buffer face)	641 mm		L/S	R/S	
	Drg No-SK.DL-3430.		FRONT			
			REAR .	646	645	
1.23	Height of Rail Guard. (114 mm + 5 mm,-12 mm).	114 mm + 5		L/S	R/S	
	As per RDSO Pamphlet Important Bogie Clearances of Electric Locomotives.	mm,-12 mm	FRONT	116	113	
			REAR	_		
1.24	CBC Height: Range (1090, +15,-5) Drg No- IB031-02002.	1090, +15 -5 mm	The state of the s	1101		

(Signature of SSE/Elect. Loco)

NAME SHURHAM SHARM DATE 25/06/2025

(Signature of /JE/Elect Loco)

NAME Pamora Moora DATE 25/06/2025

Antst (Signature of JE/UF)

NAME ANKIT UPPAL

DATE 25/06/2025.

Loco No. 42051

1. BOGIE FRAME:

BOGIE	FRAME NO	Make	PL No.	PO No. & dt.	Warranty Period
FRONT	SL-423	ECBT	29101104	102079	As per PO/IRS
REAR	SL-97	CRG	29101104	101945	conditions

2. Hydraulic Dampers (PL No.29040012) Make: KNORR / KNORR

3. AXLES:

AXLE POSITION NO	1	2	3	4	5	6
MAKE/	PLW	PLW	PLW	PLW	PLW	PLW
S.NO	28762	28926	29018	29004	29026	28952
Ultrasonic Testing	OK	OK	OK	OK	OK	OK

4. WHEEL DISCS NO. AND TYPE & BULL GEAR

AXLE POSITION NO	1	2	3	4	5	6
GEAR END	EV39-064	EV71-076	EV53-067	EQ98-23	EV88-010	EV63-035
Make	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED
FREE END	EQ89-070	EV43-067	EV74-051	EV79-26	EV64-057	EV75-061
Make	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED	IMPORTED
Bull Gear No.	25-B-15135	25-C-1792	25-C-9102	25-B-12142	25-C-12133	25-C-12132
Bull Gear Make	KPCL	KPCL	KPCL	KPCL	KPCL	KPCL

5. AXLE ROLLER BEARING (CRU) (PL No. 29010020, Warranty: As per PO/IRS conditions)

	AXLE POSITION NO	1	2	3	4	5	6
Gear	MAKE	FAG	FAG	FAG	NBC	NBC	NBC
End	PO NO. & dt	02312	02312	02312	02311	02311	02311
Free	MAKE	FAG	FAG	FAG	NBC	NBC	NBC
End	PO NO. & dt	02312	02312	02312	02311	02311	02311

6. WHEEL DISC PRESSING PRESSURE IN KN: (SPECIFIED 80-105 T)

AXLE POSITION NO	1	2	3	4	5	6
BULL GEAR END	84 T	101 T	989 KN	91 T	969 KN	100 T
FREE END	80 T	84 T	902 KN	102 T	785 KN	104 T

Loco No. 42051

7. DIAMETER AFTER PROFILE TURNING: SPECIFIED 1092 + .5 mm - 0 mm

AXLE POSITION NO	1	2	3	4	5	6
DIA IN mm GE	1092.5	1092.5	1092.5	1092.4	1092.5	1092.5
DIA IN mm FE	1092.5	1092.5	1092.5	1092.4	1092.5	1092.5
WHEEL PROFILE GAUGE (1596±0.5mm)	OK	OK	OK	OK	OK	OK

8. SUSPENSION TUBE & ITS TAPER ROLLER BEARING:

AXLE POSITION	NO	1	2	3	4	5	6
S.T. PL 29100288	MAKE	IN	IN	IN	IN	IN	IN
GE Brg. PL 29030110	MAKE	FAG	FAG	FAG	FAG	FAG	FAG
FE Brg. PL 29030110	MAKE	FAG	FAG	FAG	FAG	FAG	FAG

9. GEAR CASE (PL No. 29030018) & BACKLASH:

AXLE POSITION NO	1	2	3	4	5	6
MAKE	KPE	PEPL	KPE	EEE	EEE	EEE
BACKLASH (0.254 – 0.458mm)	0.400	0.300	0.310	0.360	0.310	0.350

10 A/BOX TO BOGIE FRAME LATERAL CLEARANCES (SPECIFIED 15.0 to 19.0mm):

AXLE POSITION NO	1	2	3	4	5	6
RIGHT SIDE	15.76	15.92	15.63	15.50	15.47	15.56
LEFT SIDE	16.16	16.72	16.37	15.40	15.71	15.42


11. TRACTION MOTOR: (PL No.29940606, Warranty: As per PO/IRS conditions)

AXLE POSITION NO	MAKE	PO No. & Date	S. NO.
1	SAINI	102034	211222411
2	DAULAT RAM	102242	DR48/0625C-0229
3	DAULAT RAM	102242	DR48/0625C-0224
4	DAULAT RAM	102242	DR48/0625C-0234
5	DAULAT RAM	102242	DR48/0625C-0237
6	DAULAT RAM	102242	DR48/0625C-0245

JE/SSE/ Bogie Shop

(A-Scan)

Frame No: ASC21 *

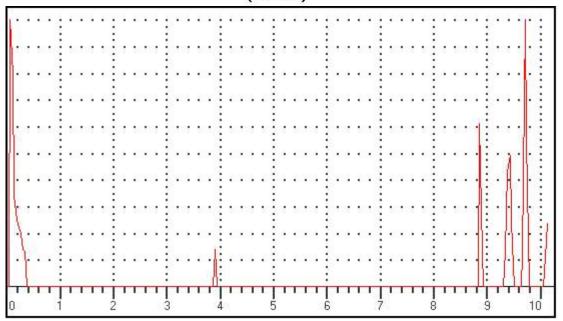

Data Setup
Gain: 36.0 dB
RANGE: 2500.00mm
MTL VEL: 5920 M/S
REJECT: 12 %
DELAY: 0.06mm
PROBE ZERO: 8.78us

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF Gate 2 (Status): OFF Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.........:Dt:31/5/2025 Tm:9:43

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code: CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC22 *

(A-Scan)

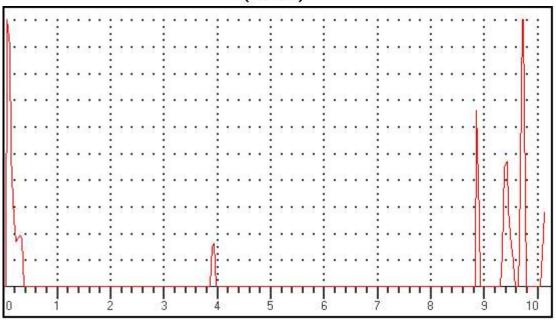

Data Setup

Gain: 36.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm


THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC23 *

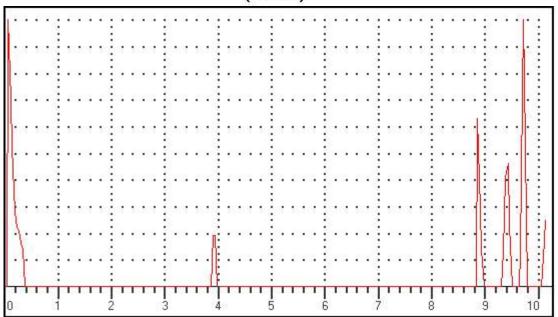

Gain: 36.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

Data Setup

MODE: SINGLE
PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:31/5/2025 Tm:9:44

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28762


Operator Name/Code : CK MISHRA

Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....Frame No: ASC24 *

(A-Scan)

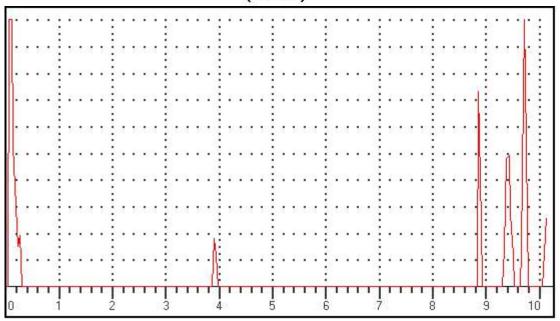

Data Setup

Gain: 36.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:31/5/2025 Tm:9:49 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762 Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC25 *

(A-Scan)

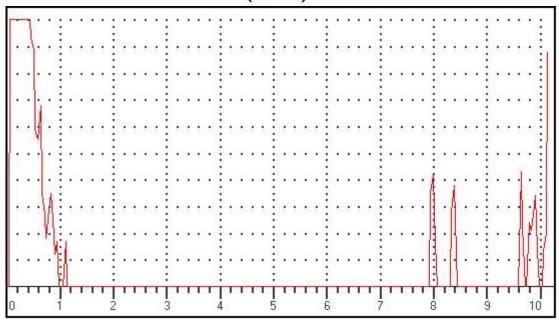

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Date and Time......:Dt:31/5/2025 Tm:9:49
UFD Model: Arya 1(R) Sr No:AA0362-4220
Railway/Workshop.....: BS PLW
Type of Axle/wheel....: WAG9 Axle/wheel No:28762
Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC26 *

(A-Scan)

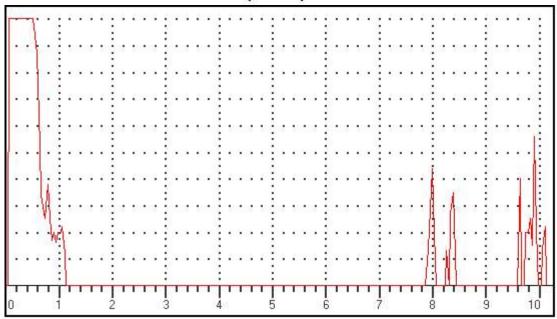

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:31/5/2025 Tm:9:50 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC27 *

(A-Scan)

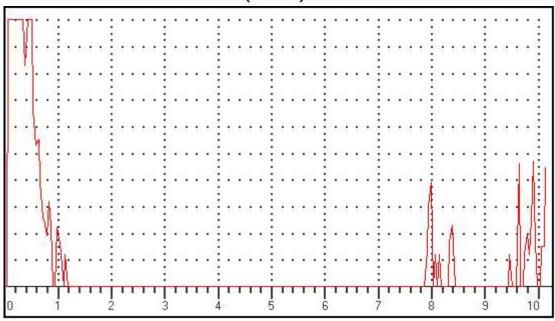

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Date and Time......Dt:31/5/2025 Tm:9:51 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW


Type of Axle/wheel....: WAG9 Axle/wheel No:28762 Operator Name/Code : CK MISHRA

Defect Location GE Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC28 *

(A-Scan)

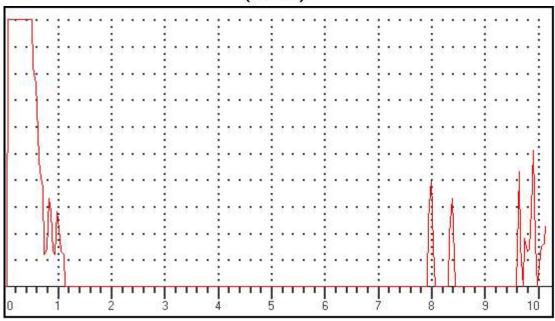

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:9:52 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC29 *

(A-Scan)

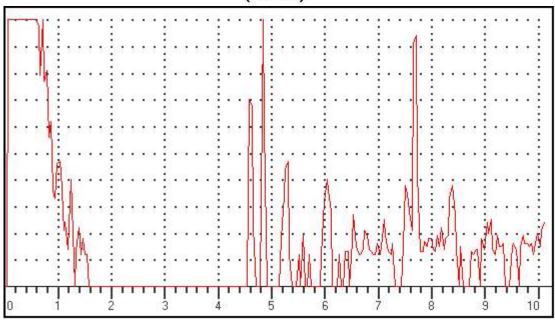

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:9:52 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC30 *

(A-Scan)

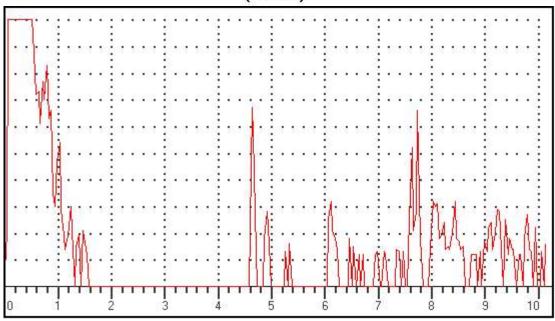

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:9:52 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC31 *

(A-Scan)

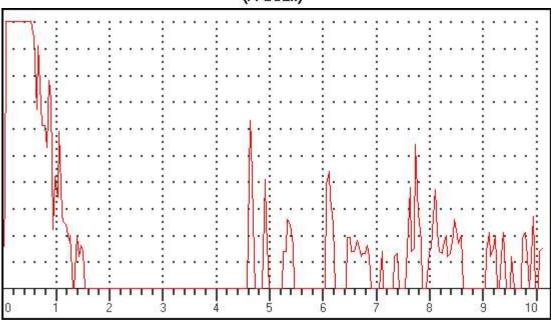

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Date and Time......:Dt:31/5/2025 Tm:9:52 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC32 *

(A-Scan)

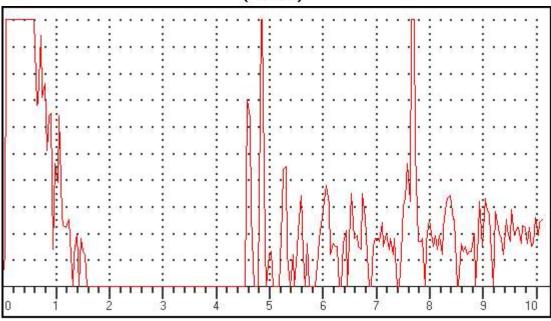

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:10:0 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC33 *

(A-Scan)

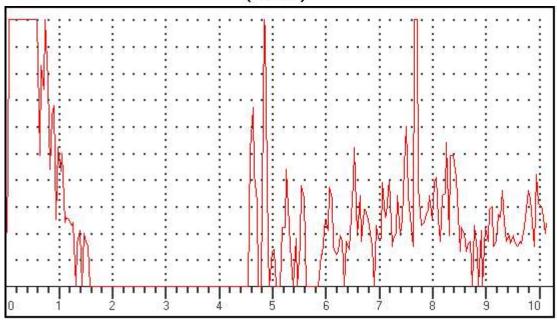

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:31/5/2025 Tm:10:0 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC34 *

(A-Scan)

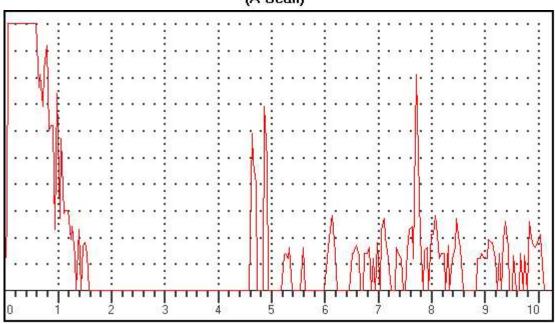

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.........:Dt:31/5/2025 Tm:10:0
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC35 *

(A-Scan)

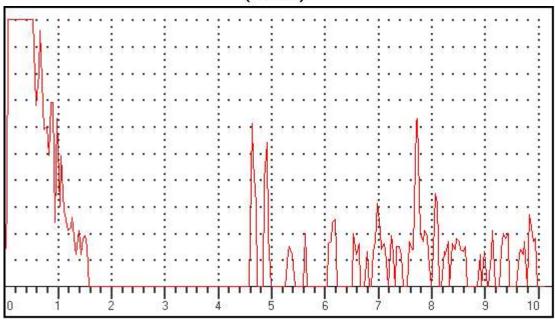

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:31/5/2025 Tm:10:0 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC36 *

(A-Scan)

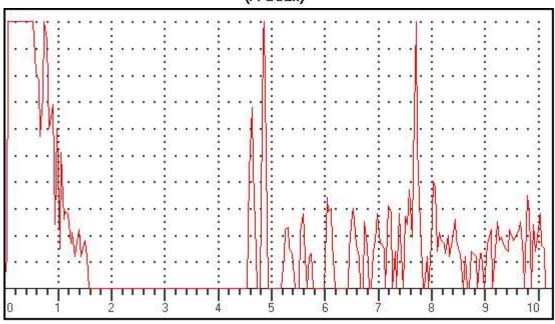

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:31/5/2025 Tm:10:1	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28762
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail <u>/other):</u>	
If other, then Remarks	

Frame No: ASC37 *

(A-Scan)

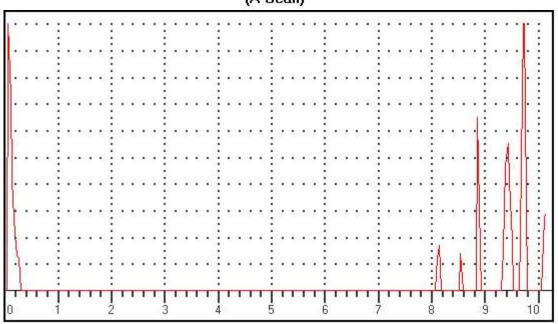


Data Setup Gain: 34.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): Gate 2(Beam Path): mm PROBE ANGLE: 0.0DEG THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:31/5/2025 Tm:10:1	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28762
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC38 *

(A-Scan)

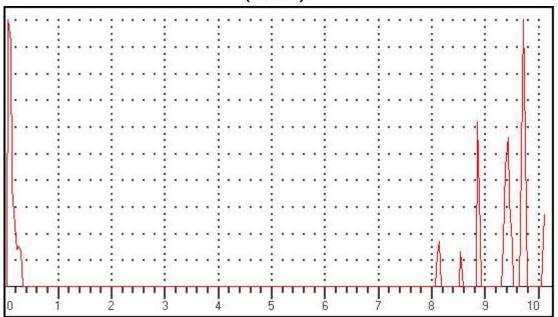

Data Setup Gain: 36.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time........:Dt:31/5/2025 Tm:10:2

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28762

Operator Name/Code: CK MISHRA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks......

Frame No: ASC39 *

(A-Scan)

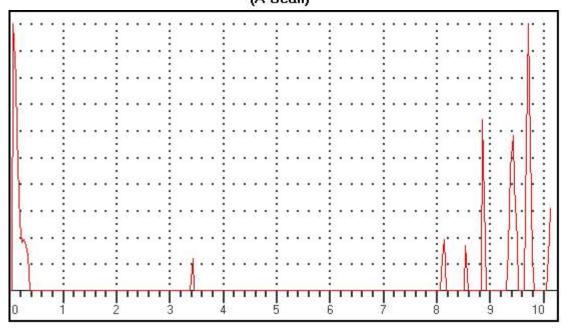

Data Setup

Gain: 36.0 dB Gate 1 (Status): OFF

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:31/5/2025 Tm:10:2

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28762

Operator Name/Code : CK MISHRA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC40 *

(A-Scan)

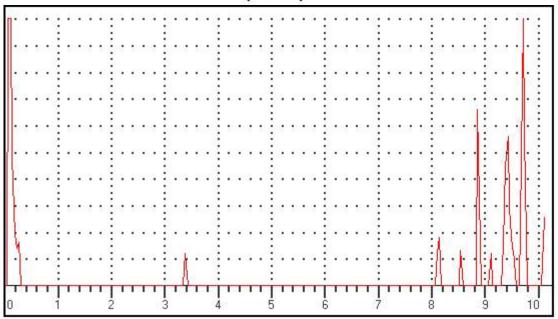

Data Setup

Gain: 36.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC101 *

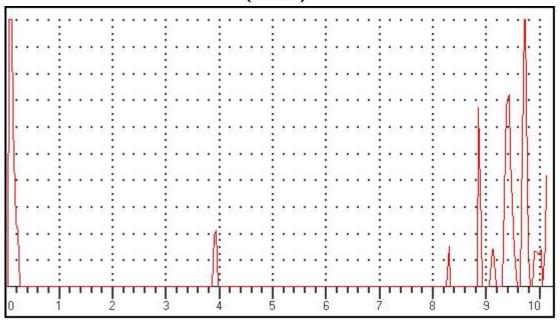


Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:29/5/2025 Tm:11:32	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28926
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other than Domarka	

Frame No: ASC102 *

(A-Scan)

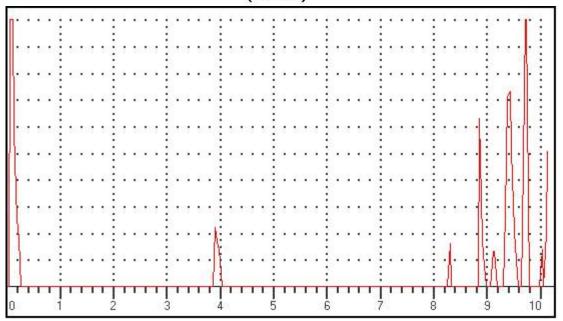


Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:29/5/2025 Tm:11:32	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28926
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other than Domarks	

(A-Scan)

·

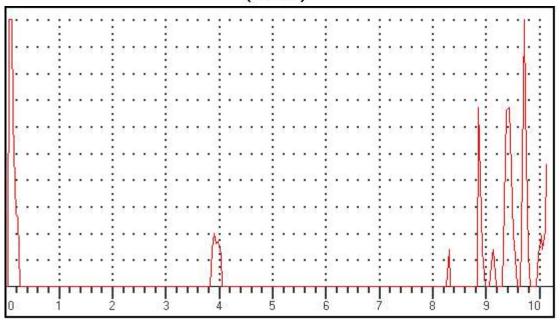

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Observation/Remarks (If Any):

Frame No: ASC103 *

Date and Time.......:Dt:29/5/2025 Tm:11:33

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926


Operator Name/Code: CK MISHRA

Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....Frame No: ASC104 *

(A-Scan)

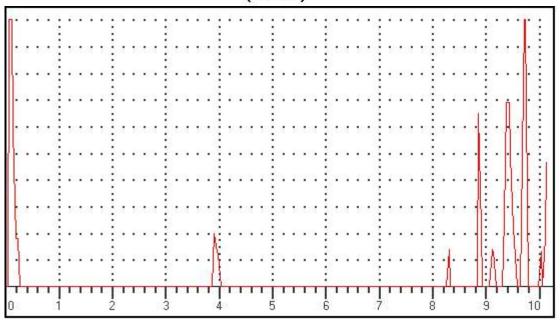

Data Setup

Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8,78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:35
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC105 *

(A-Scan)

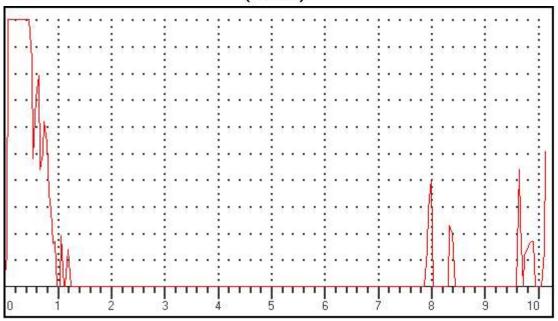

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:35
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC106 *

(A-Scan)

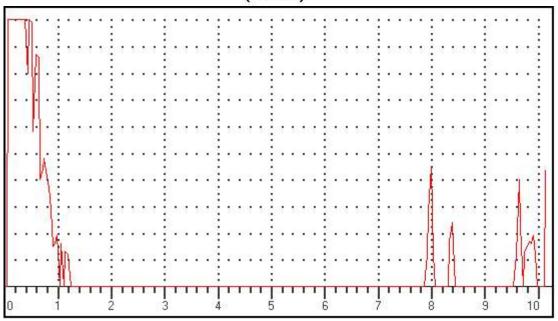

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:35

UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC107 *

(A-Scan)

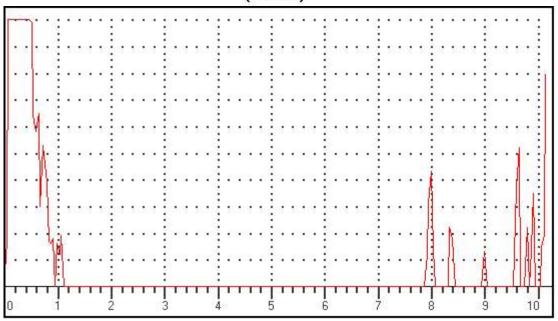

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:29/5/2025 Tm:11:36

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code: CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC108 *

(A-Scan)

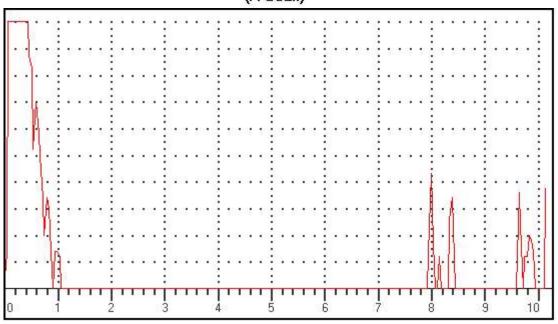

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): n

Gate 2(Surface Distance): mm Gate 2(Depth): mm

Gate Zibeptilij. Illii

Date and Time......Dt:29/5/2025 Tm:11:38
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC109 *

(A-Scan)

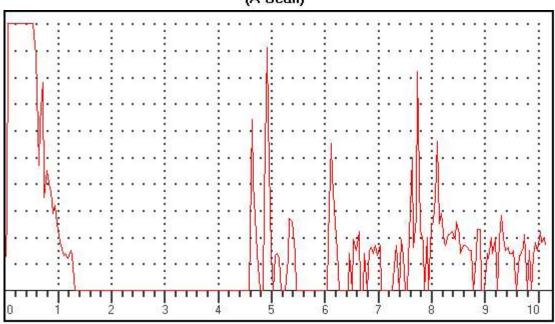

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:38

UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC110 *

(A-Scan)

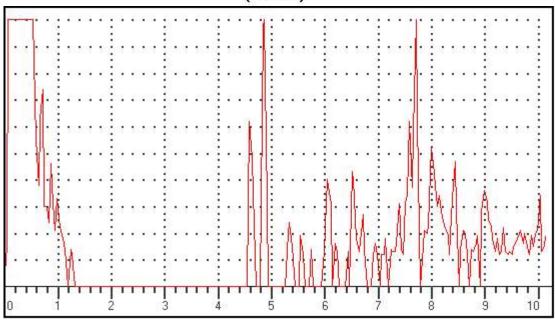

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC111 *

(A-Scan)

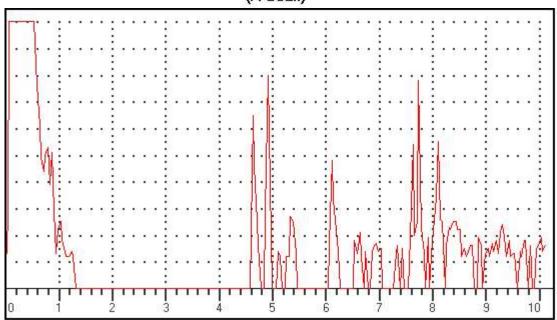

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mn

EJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mn

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:39 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC112 *

(A-Scan)

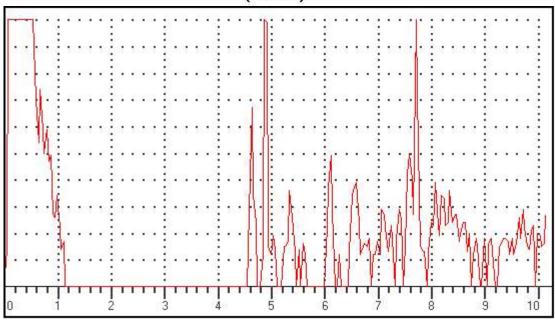

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:50

UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC113 *

(A-Scan)

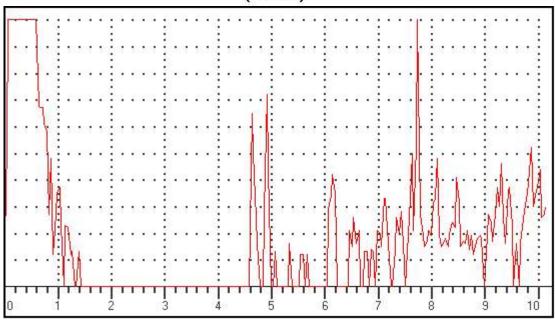

Data Setup

Gain: 53.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Surface Distance): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:29/5/2025 Tm:11:50
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC114 *

(A-Scan)

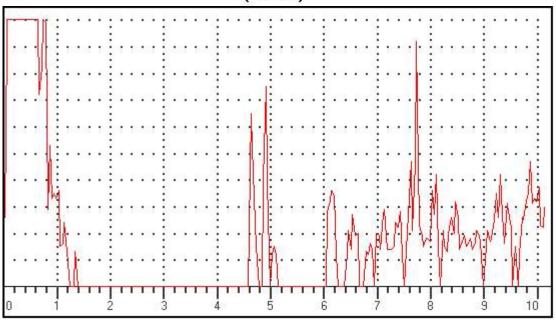

Data Setup

Gain: 53.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:51 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC115 *

(A-Scan)

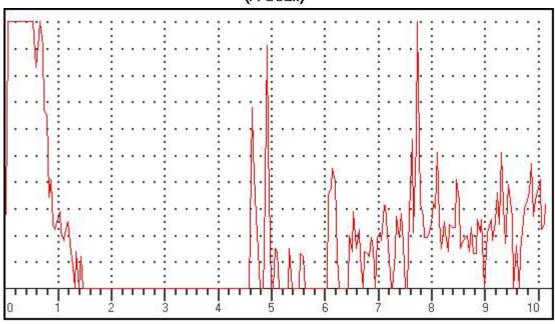

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:29/5/2025 Tm:11:52 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC116 *

(A-Scan)

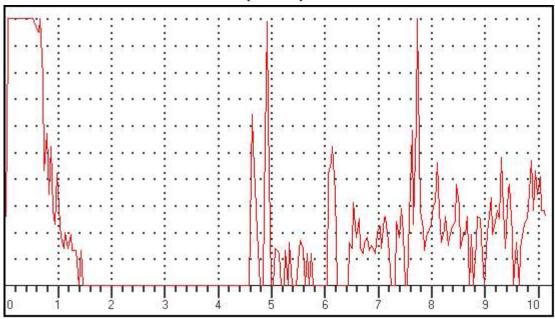

Data Setup

Gain: 53.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:53

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code: CK MISHRA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC117 *

(A-Scan)

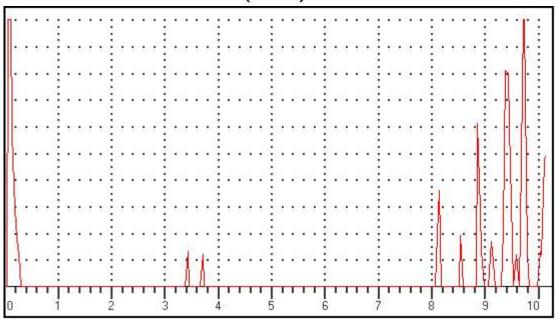

Data Setup Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:29/5/2025 Tm:11:53

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28926

Operator Name/Code: CK MISHRA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC118 *

(A-Scan)

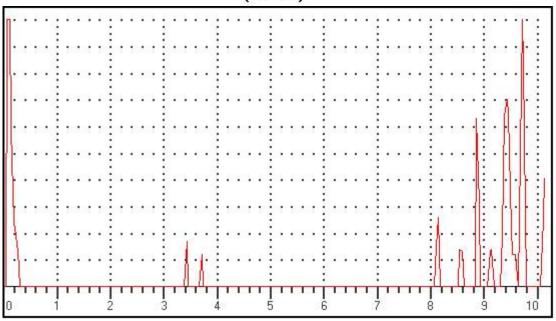

Data Setup

Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC119 *

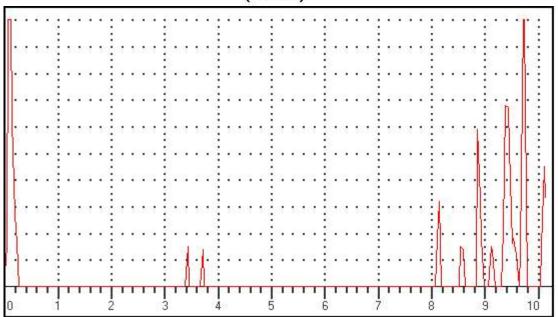

Data Setup Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:29/5/2025 Tm:11:54

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: WAG9 Axle/wheel No:28926

Operator Name/Code: CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks......

(A-Scan)

Frame No: ASC120 *

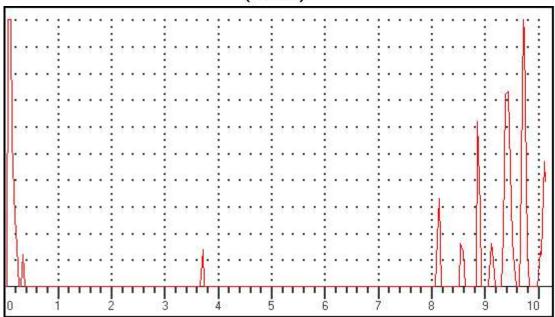

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:10:26

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC41 *

(A-Scan)

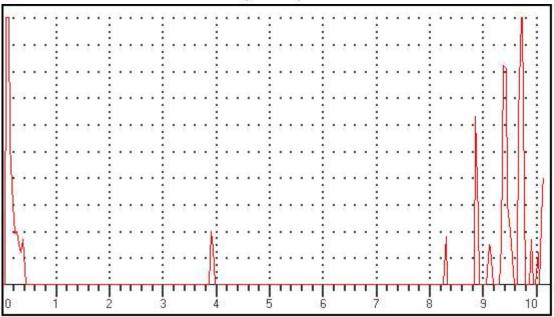

Data Setup Gain: 38.0 dB

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm


Gate 1 (Status): OFF

Date and TimeDt:3/6/2025 Tm:10:27	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29018
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other then Remarks	

Frame No: ASC42 *

Observation/Remarks (If Any):

(A-Scan)

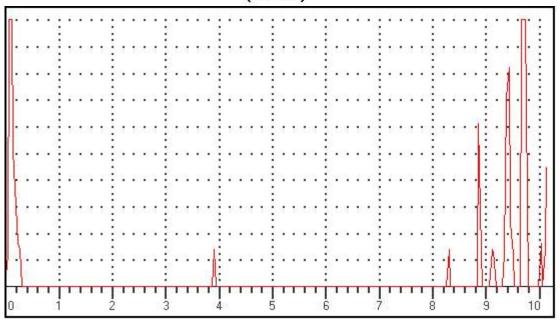

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:10:27

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code: CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC43 *

(A-Scan)

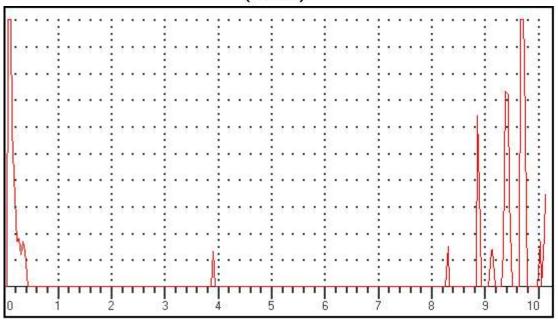

Data Setup

Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Date and TimeDt:3/6/2025 Tm:10:27	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29018
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other than Remarks	

Frame No: ASC44 *

Observation/Remarks (If Any):

(A-Scan)

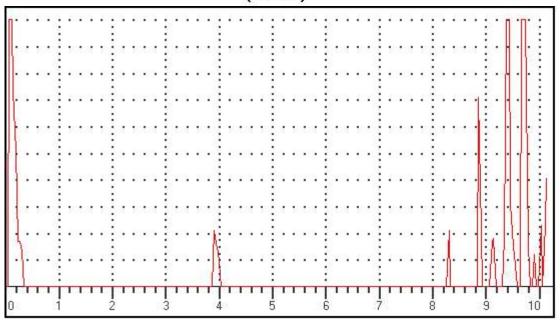

Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:10:28
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC45 *

(A-Scan)

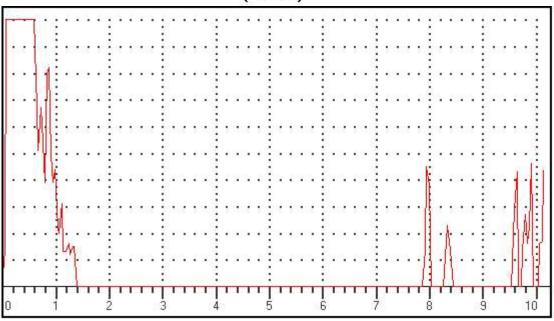

Data Setup

Gain: 50.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:10:29 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC46 *

(A-Scan)

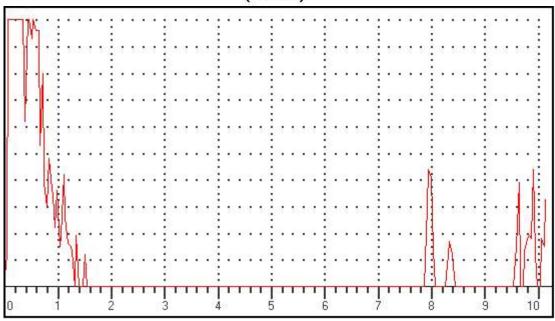

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:10:29
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Deibus: Allorkohan : BS DLW

Railway/Workshop...: BS PLW

Type of Axle/wheel: WAG9 Axle/wheel No:29018


Operator Name/Code : CK MISHRA

Defect Location: GE
Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC47 *

(A-Scan)

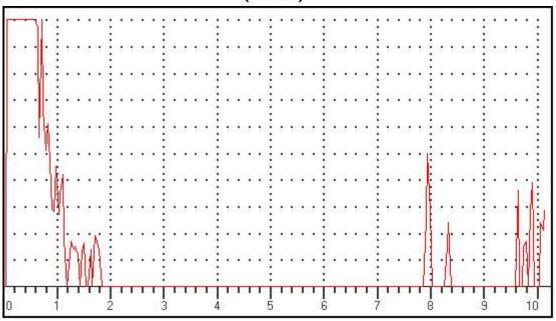

Data Setup

Gain: 50.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time........:Dt:3/6/2025 Tm:10:29
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC48 *

(A-Scan)

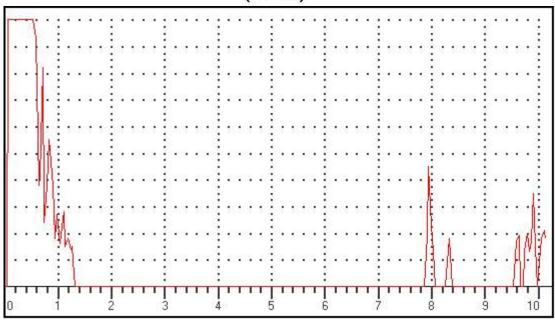

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Date and Time......:Dt:3/6/2025 Tm:10:30 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC49 *

(A-Scan)

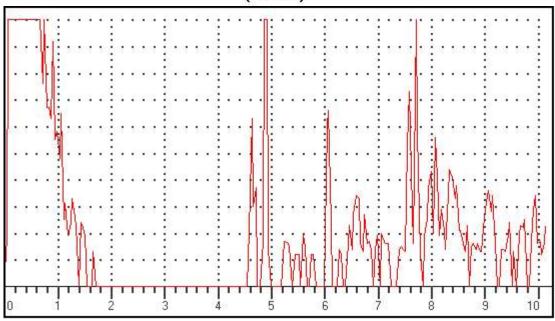

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:10:31 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC50 *

(A-Scan)

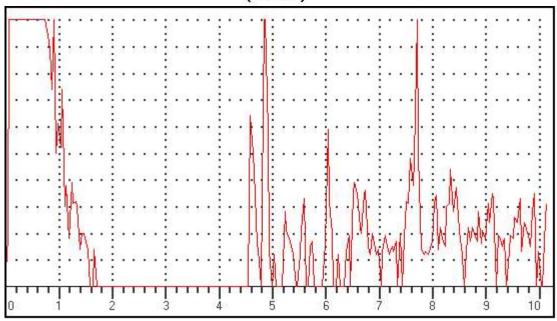

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:10:31 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC51 *

(A-Scan)

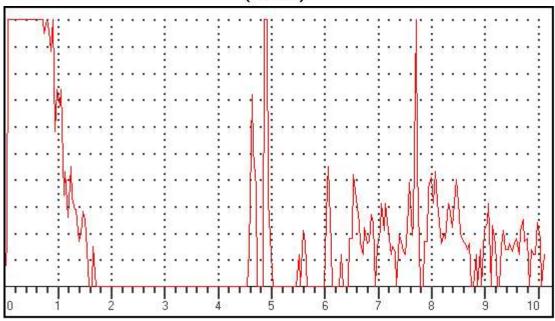

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:10:31 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC52 *

(A-Scan)

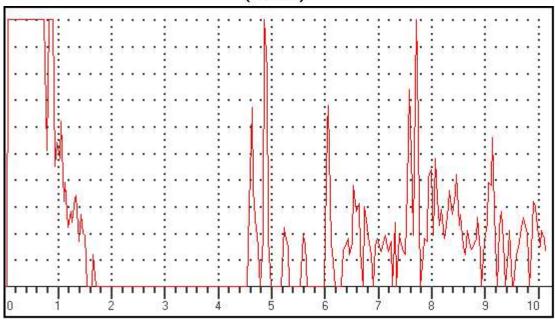

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:3/6/2025 Tm:10:39 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC53 *

(A-Scan)

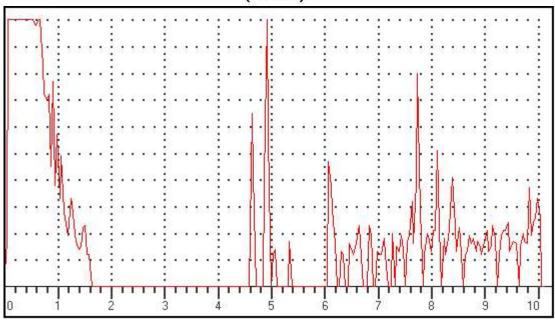

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:3/6/2025 Tm:10:39
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect LocationFE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC54 *

(A-Scan)

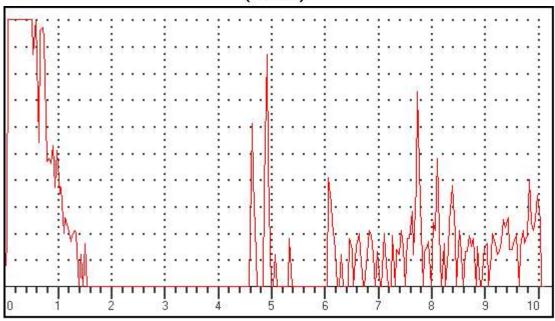

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

EJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Date and Time......:Dt:3/6/2025 Tm:10:40 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC55 *

(A-Scan)

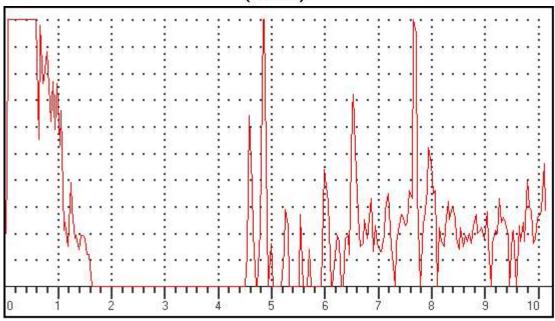

Data Setup

Gain: 50.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:3/6/2025 Tm:10:40

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29018

Operator Name/Code : CK MISHRA


Defect LocationFE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC56 *

(A-Scan)

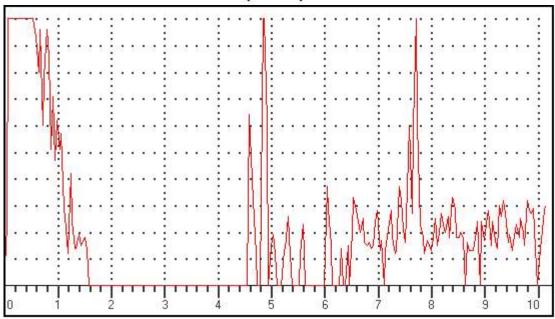

Data Setup

Gain: 50.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm


MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC57 *

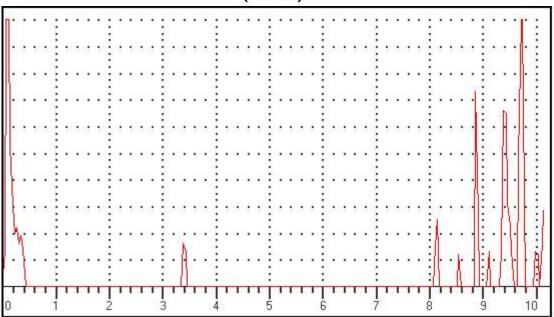

Data Setup Gain: 36.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Observation/Remarks (If Any):

THICK: 100.00mm

Date and Time.......:Dt:3/6/2025 Tm:10:41

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:29018


Operator Name/Code : CK MISHRA

Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....Frame No: ASC58 *

(A-Scan)

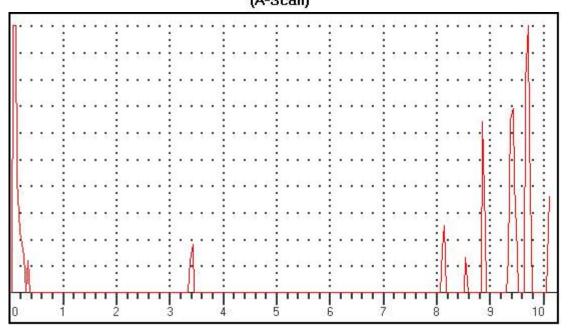

Data Setup Gain: 36.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:3/6/2025 Tm:10:42	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29018
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	

If other, then Remarks......Frame No: ASC59 *

(A-Scan)

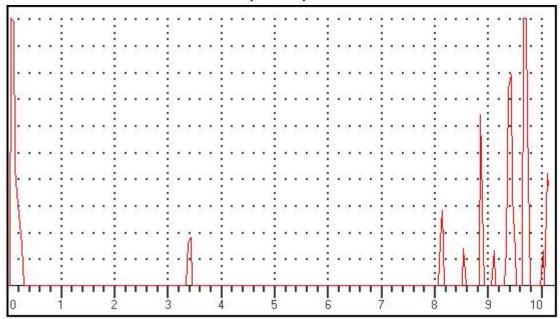

Data Setup Gain: 37.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

54to 2(55pt.ii). IIII

Date and Time.......:Dt:3/6/2025 Tm:10:42

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: WAG9 Axle/wheel No:29018

Operator Name/Code: CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC60 *

(A-Scan)

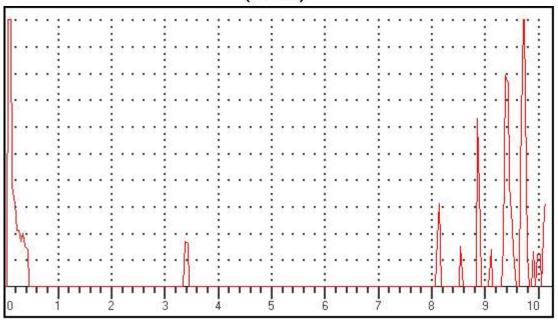

 Data Setup

 Gain: 37.0 dB
 Gate 1 (Status): OFF

 RANGE: 2500.00mm
 Gate 2 (Status): OFF

 MTL VEL: 5920 M/S
 Gate 1(Echo height): 0 %

 REJECT: 12 %
 Gate 1(Beam Path): 0.00mm

 DELAY: 0.06mm
 Gate 1(Surface Distance): 0.00mm


 PROBE ZERO: 8.78us
 Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm
THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:12:22	
UFD Model: Arya 1(R) Sr No:AA0362-4220	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29004
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC181 *	

(A-Scan)

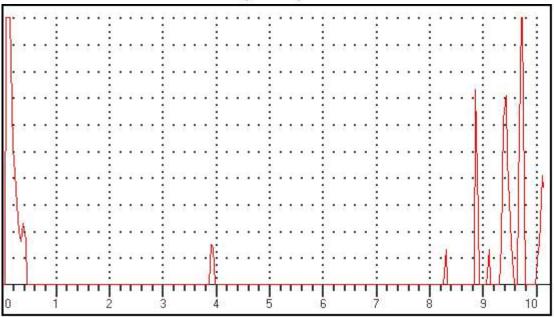

Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:4/6/2025 Tm:12:22

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: WAG9 Axle/wheel No:29004

Operator Name/Code: RAMVEER MEENA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks......

(A-Scan)

Frame No: ASC182 *

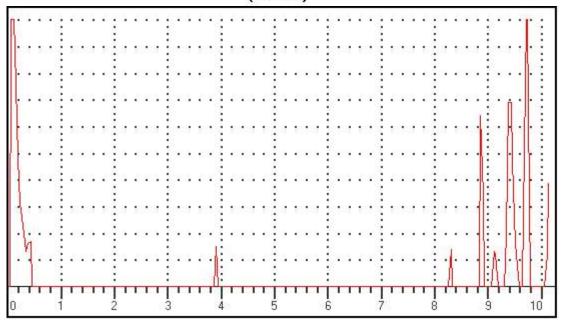


Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:12:22	
UFD Model: Arya 1(R) Sr No:AA0362-4220	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29004
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC183 *	

(A-Scan)

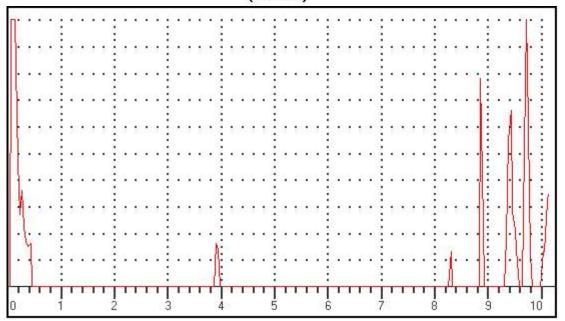

Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm


Date and TimeDt:4/6/2025 Tm:12:22	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29004
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC184 *

Observation/Remarks (If Any):

(A-Scan)

.....

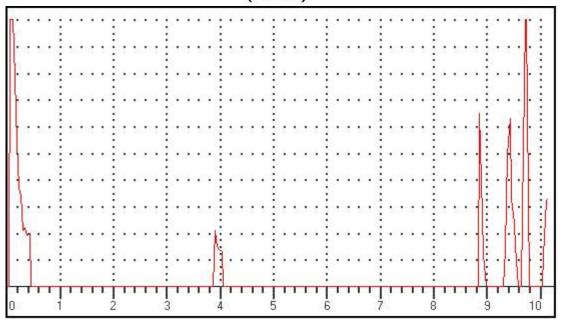

Data Setup Gain: 40.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:12:23
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29004

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC185 *

(A-Scan)

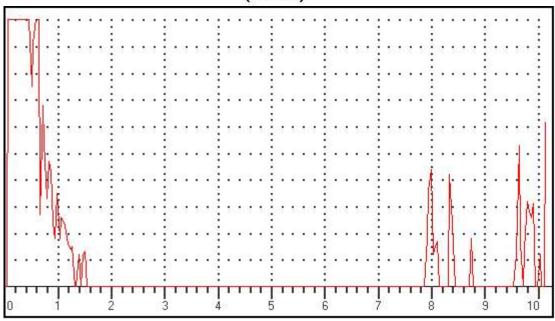

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:12:24 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29004 Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC186 *

(A-Scan)

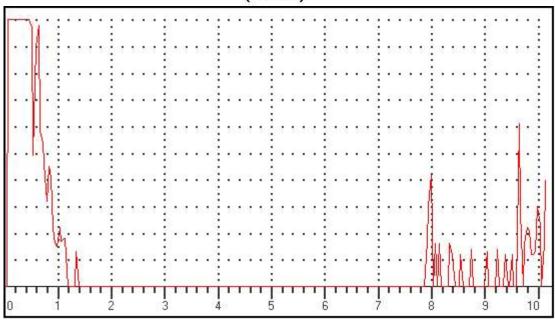

Data Setup

Gain: 50.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm


Date and Time......Dt:4/6/2025 Tm:12:25 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:29004 Operator Name/Code : RAMVEER MEENA

Defect Location GE Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC187 *

(A-Scan)

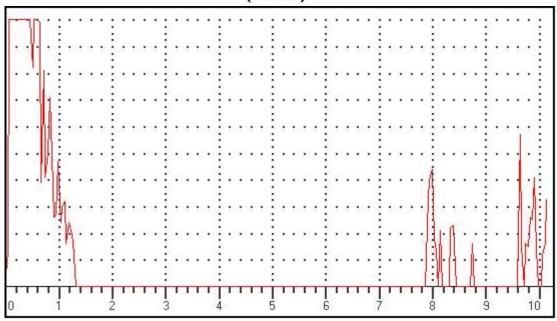

Data Setup

RANGE: 1000.00mm

Gain: 49.0 dB Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:12:25 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:29004

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC188 *

(A-Scan)

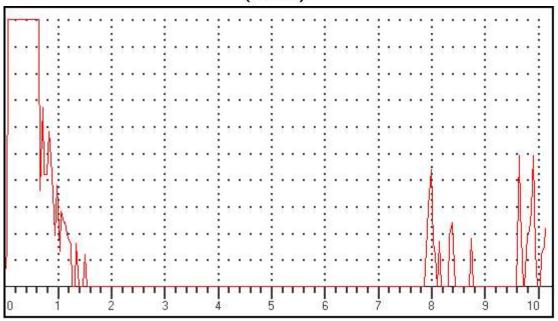

Data Setup

Gain: 50.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 2(Beam Path): mm

Date and Time.......:Dt:4/6/2025 Tm:12:26

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: WAG9 Axle/wheel No:29004

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC189 *

(A-Scan)

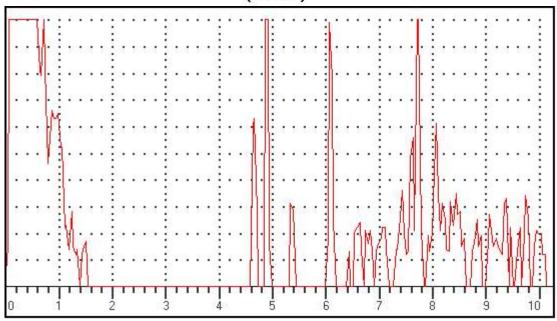

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

FLAV. 0.00

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:12:26 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29004

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC190 *

(A-Scan)

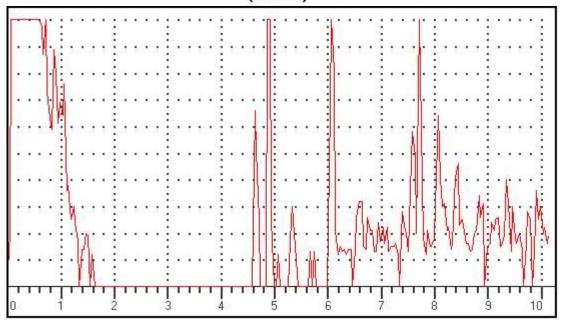

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG

Gate 2(Beam Path): mm THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:12:26 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:29004


Operator Name/Code : RAMVEER MEENA

Defect Location GE Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC191 *

(A-Scan)

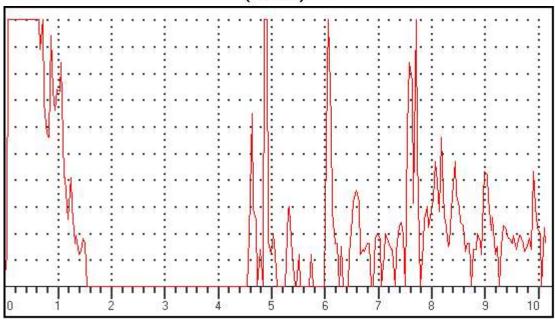

Data Setup

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm


Date and Time......Dt:4/6/2025 Tm:12:26 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:29004 Operator Name/Code : RAMVEER MEENA

Defect Location GE

Test Results (Pass/Fail/other): If other, then Remarks.....

Frame No: ASC192 *

(A-Scan)

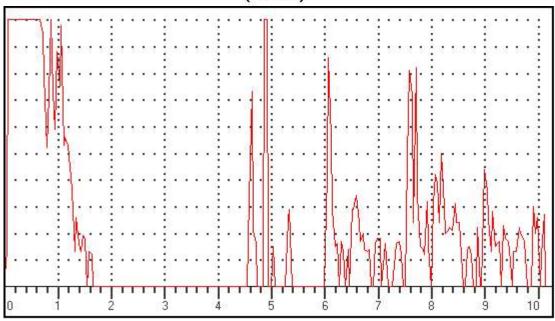

Data Setup

Observation/Remarks (If Any):

Gain: 51.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG

Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:12:32 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29004

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC193 *

(A-Scan)

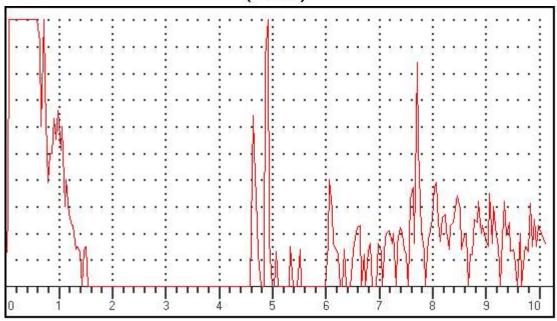

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:12:32 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29004

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC194 *

(A-Scan)

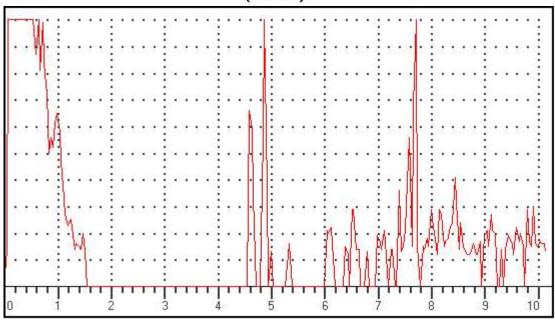

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:12:32 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29004 Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC195 *

(A-Scan)

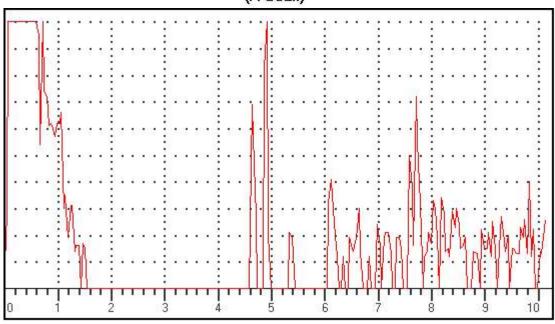

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG

Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:12:32 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29004

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC196 *

(A-Scan)

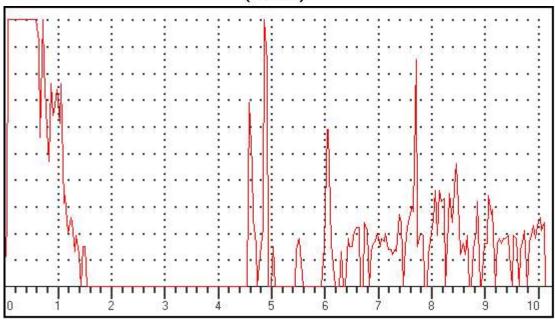

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:12:34	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29004
Operator Name/Code : RAMVEER MEENA	
Defect Location FE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC197 *	


(A-Scan)

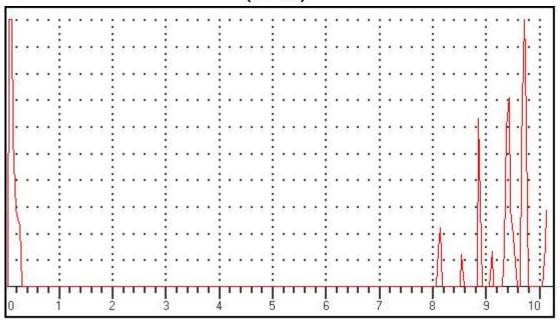

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Axle/wheel No:29004

(A-Scan)

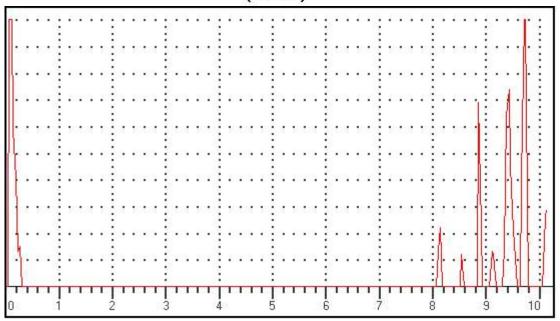

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm


Observation/Remarks (If Any):

Frame No: ASC198 *

Date and TimeDt:4/6/2025 Tm:12:34	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29004
Operator Name/Code : RAMVEER MEENA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

(A-Scan)

.....

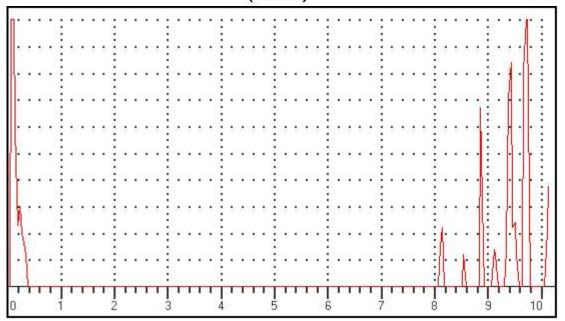

Gain: 38.0 dB RANGE: 2500.00mm MTL VEL: 5920 M/S REJECT: 12 % DELAY: 0.06mm

Frame No: ASC199 *

PROBE ZERO: 8,78us MODE: SINGLE

Data Setup

PROBE ANGLE: 0.0DEG THICK: 100.00mm

Observation/Remarks (If Any):

Gate 1 (Status): OFF Gate 2 (Status): OFF Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:12:35	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29004
Operator Name/Code : RAMVEER MEENA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC200 *

(A-Scan)

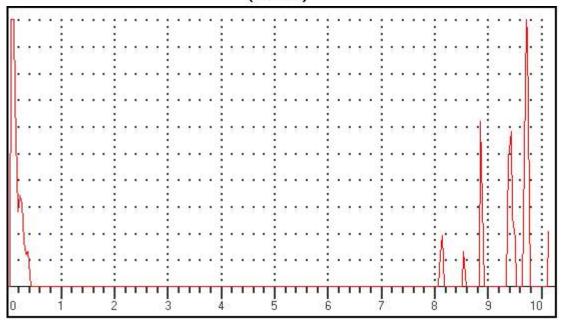

Data Setup
Gain: 38.0 dB
Gate 1 (Status): OFF
RANGE: 2500.00mm
Gate 2 (Status): OFF
MTL VEL: 5920 M/S
Gate 1(Echo height): 0 %
Gate 1(Beam Path): 0.00mm
DELAY: 0.06mm
Gate 1(Surface Distance): 0.00mm
PROBE ZERO: 8.78us
Gate 2(Echo height):
Gate 2(Echo height):

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm
THICK: 100.00mm Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:10:57	
UFD Model: Arya 1(R) Sr No:AA0362-4220	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29026
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other then Bemarks	

Frame No: ASC81 *

Observation/Remarks (If Any):


(A-Scan)

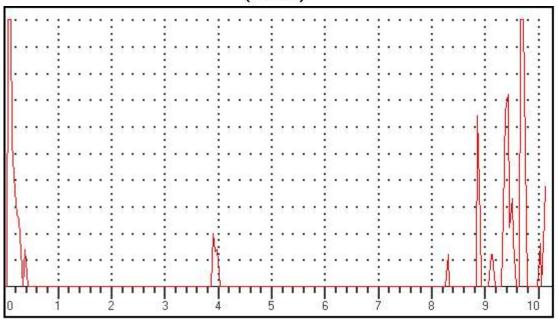

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:10:57	
UFD Model: Arya 1(R) Sr No:AA0362-4220	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29026
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	
Frame No: ASC82 *	

(A-Scan)

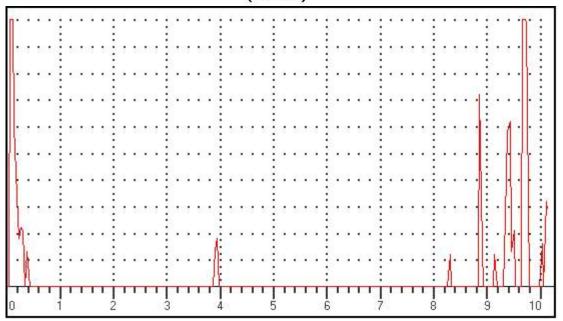

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:4/6/2025 Tm:10:58

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: WAG9 Axle/wheel No:29026

Operator Name/Code: RAMVEER MEENA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks......

(A-Scan)

Frame No: ASC83 *

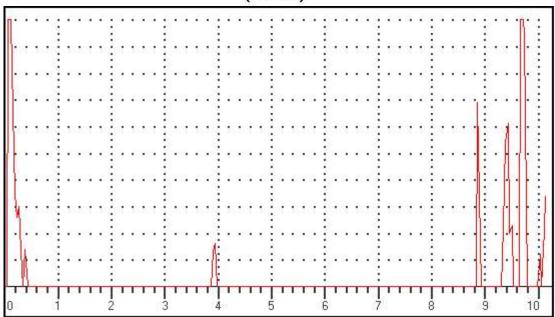

Gate 2(Depth): mm


Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

5 5 50

Date and TimeDt:4/6/2025 Tm:10:58	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29026
Operator Name/Code : RAMVEER MEENA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC84 *

(A-Scan)

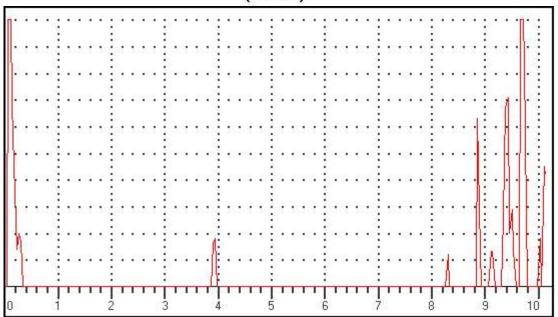

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:4/6/2025 Tm:10:59
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC85 *

(A-Scan)

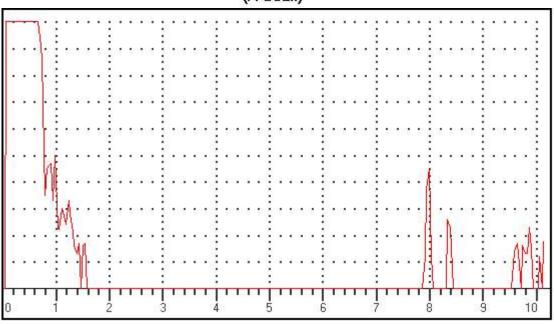

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 10.0DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:11:0

UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC86 *

(A-Scan)

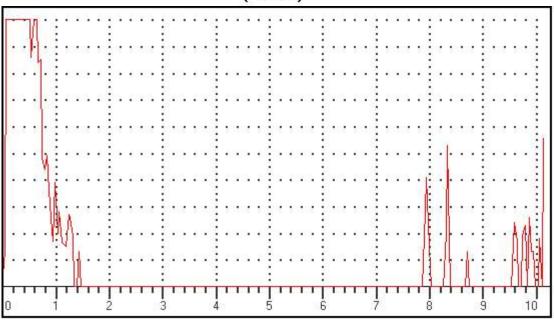

Data Setup

Gain: 47.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:1

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: WAG9 Axle/wheel No:29026

Operator Name/Code: RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC87 *

(A-Scan)

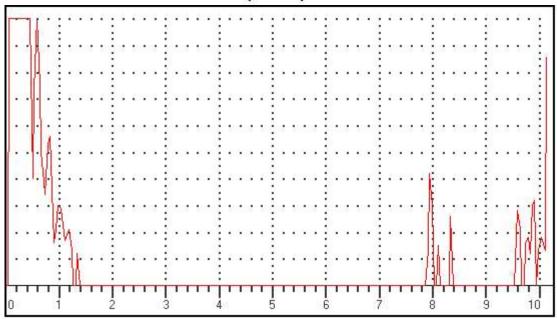

Data Setup

Gain: 47.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:11:1
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC88 *

(A-Scan)

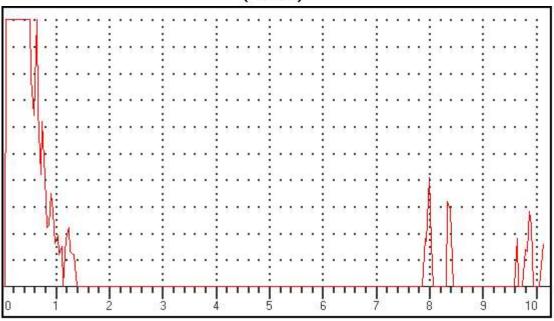

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

EJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mn

ROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:3 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC89 *

(A-Scan)

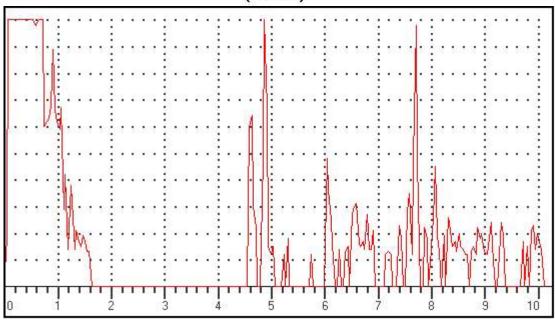

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:11:3 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC90 *

(A-Scan)

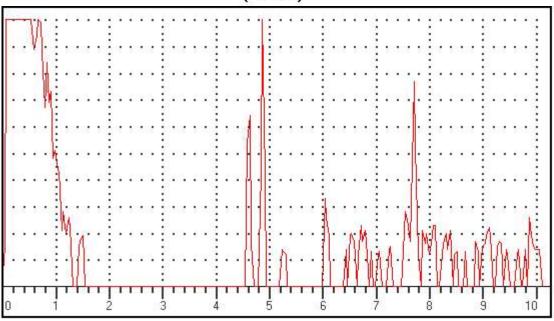

Data Setup

Gain: 49.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Gate 1 (Status): PLOGIC

Date and Time......Dt:4/6/2025 Tm:11:4 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW Type of Axle/wheel....: WAG9 Axle/wheel No:29026 Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC91 *

(A-Scan)

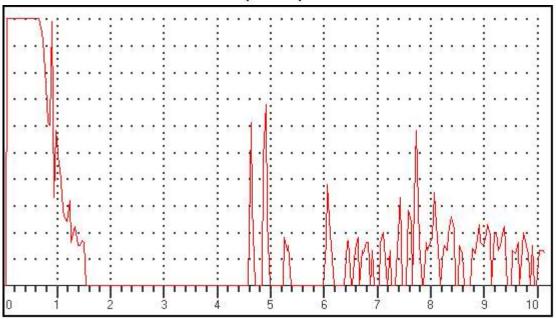

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:4
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC92 *

(A-Scan)

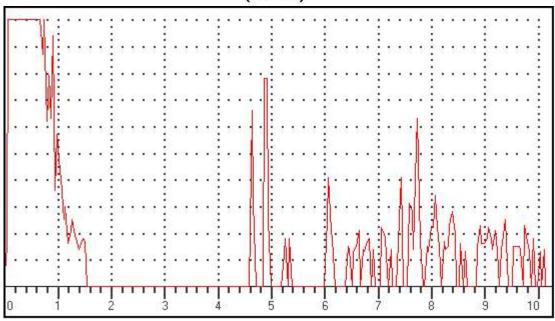

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 17.5DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:11 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC93 *

(A-Scan)

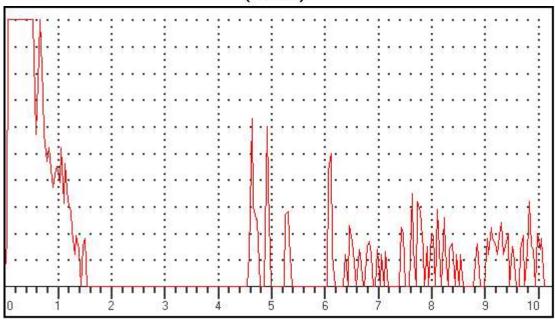

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:11 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC94 *

(A-Scan)

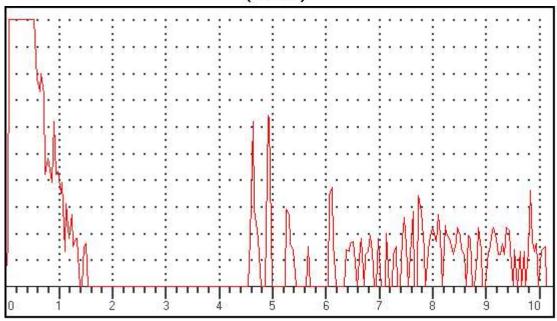

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:12 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC95 *

(A-Scan)

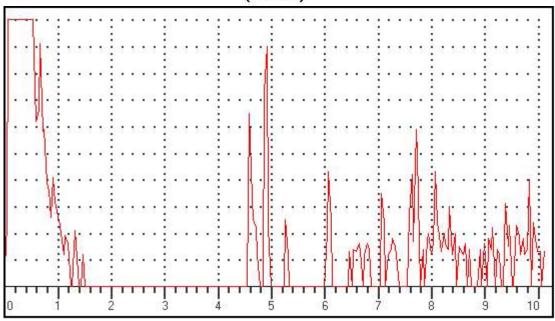

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:11:12
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code : RAMVEER MEENA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC96 *

(A-Scan)

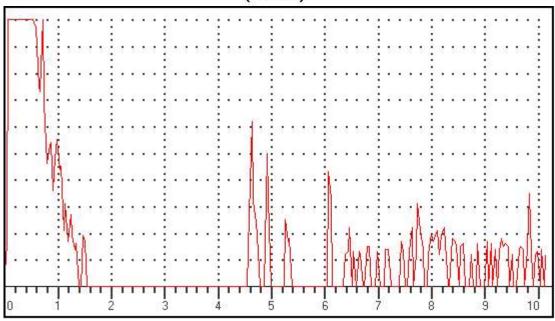

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

(A-Scan)

Frame No: ASC97 *

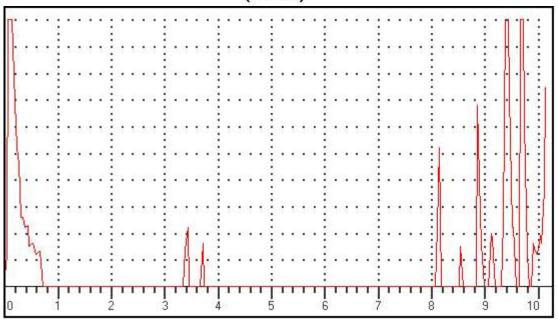

Data Setup Gain: 43.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:4/6/2025 Tm:11:13

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:29026

Operator Name/Code: RAMVEER MEENA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC98 *

(A-Scan)

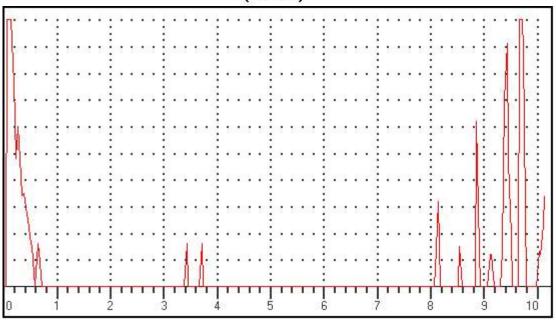

Data Setup

Gain: 43.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time:Dt:4/6/2025 Tm:11:13	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29026
Operator Name/Code : RAMVEER MEENA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC99 *

(A-Scan)

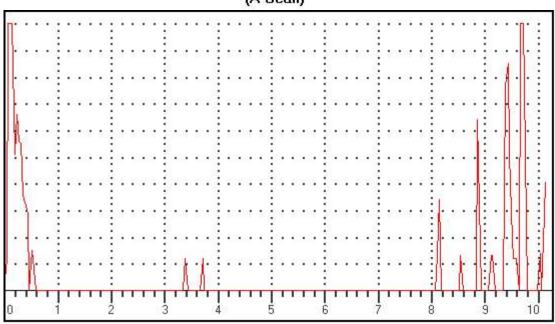


Data Setup Gain: 41.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:11:13	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:29026
Operator Name/Code : RAMVEER MEENA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC100 *

(A-Scan)

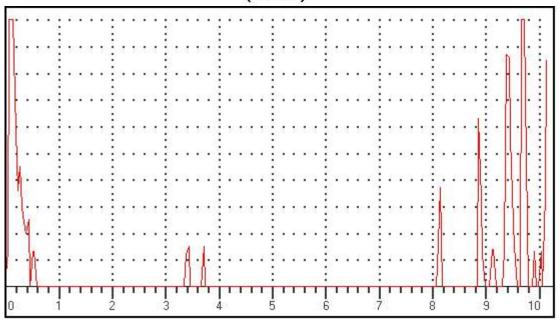


Data Setup Gain: 41.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and TimeDt:4/6/2025 1m:11:53	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28952
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	

If other, then Remarks.....

Frame No: ASC141 *

(A-Scan)

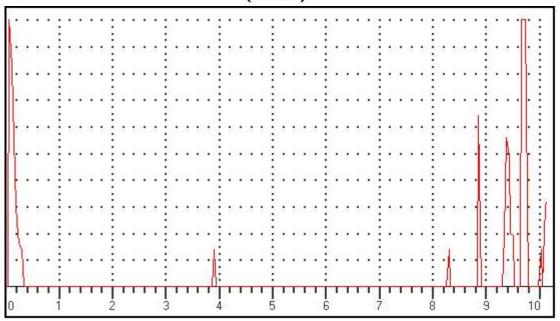

Data Setup
Gain: 36.0 dB
Gate 1 (Status): OFF
RANGE: 2500.00mm
Gate 2 (Status): OFF
MTL VEL: 5920 M/S
GATE 1 (Echo height): 0 %
GATE 1 (Beam Path): 0.00mm
DELAY: 0.06mm
GATE 1 (Surface Distance): 0.00mm
PROBE ZERO: 8.78us
GATE 1 (Depth): 0.00mm
GATE 2 (Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm


THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:11:53	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28952
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC142 *

(A-Scan)

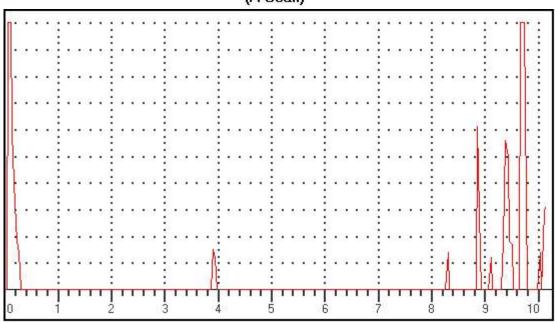

Data Setup Gain: 36.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time.......:Dt:4/6/2025 Tm:11:53

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC143 *

(A-Scan)

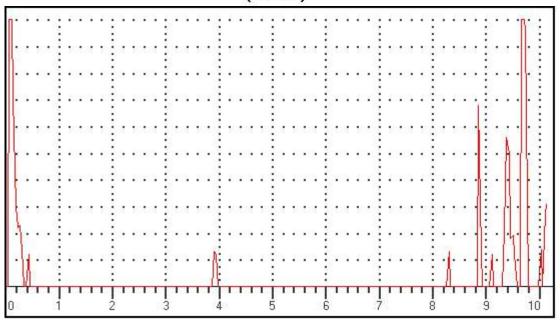

Data Setup

Gain: 36.0 dB

RANGE: 2500.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm


Gate 2(Depth): mm

Gate 1 (Status): OFF

Date and TimeDt:4/6/2025 1m:11:54	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28952
Operator Name/Code : CK MISHRA	
Defect Location GE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

Frame No: ASC144 *

(A-Scan)

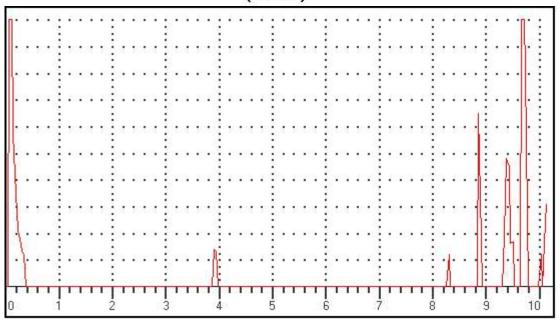

Data Setup Gain: 36.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 0.0DEG Gate 2(Beam Path): mm THICK: 100.00mm Gate 2(Surface Distance): mm Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:55
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0
Railway/Workshop....: <u>BS PLW</u>

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location: GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC145 *

(A-Scan)

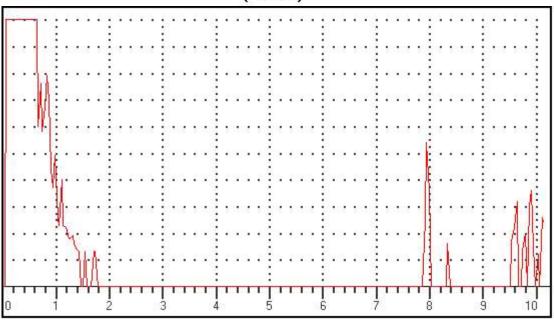

Data Setup

Gain: 52.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %
REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):
PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:11:56 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC146 *

(A-Scan)

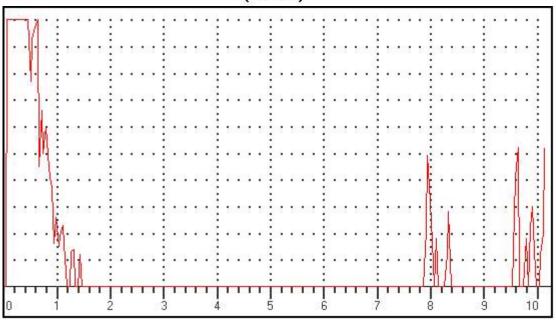

Data Setup

Gain: 47.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 10.0DEG

Gate 2(Beam Path): mm THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 1 (Status): PLOGIC

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:56

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop....: BS PLW

Type of Axle/wheel...: WAG9 Axle/wheel No:28952

Operator Name/Code: CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC147 *

(A-Scan)

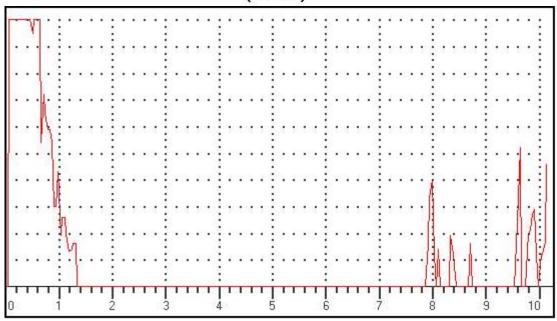

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:11:57 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952 Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC148 *

(A-Scan)

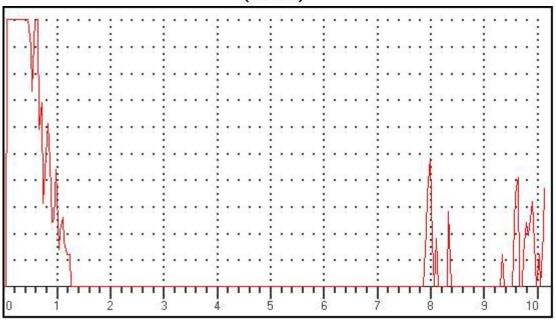

Data Setup

Gain: 49.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm MODE: SINGLE Gate 2(Echo height):

PROBE ANGLE: 10.0DEG Gate 2(Beam Path): mm

THICK: 100.00mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:11:58 UFD Model: Arya 1(R) Sr No:AA0362-4220 Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC149 *

(A-Scan)

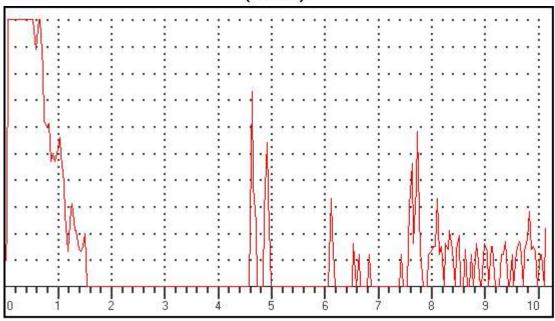

Data Setup

Gain: 48.0 dB Gate 1 (Status): PLOGIC

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG

Gate 2(Beam Path): mm THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:58
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC150 *

(A-Scan)

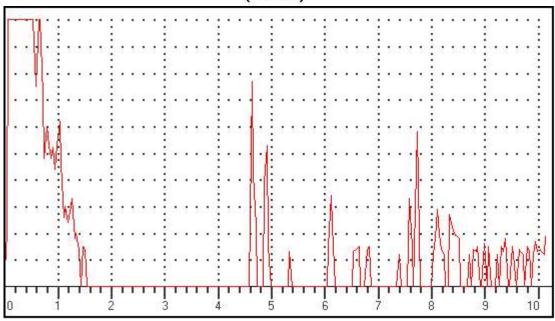

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:11:58

UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: <u>BS PLW</u>

Type of Axle/wheel: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC151 *

(A-Scan)

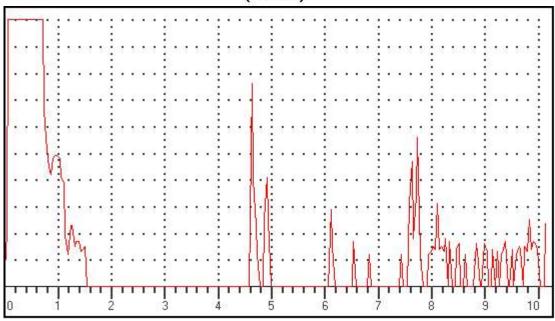

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......Dt:4/6/2025 Tm:11:58 UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location GE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC152 *

(A-Scan)

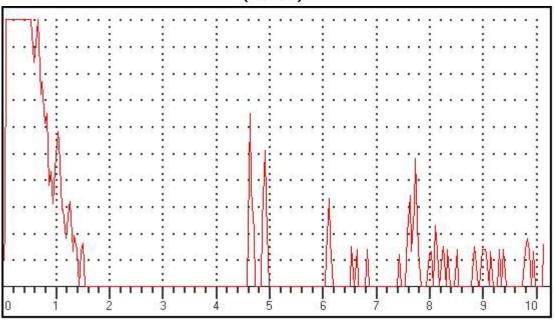

Data Setup

Gain: 48.0 dB

RANGE: 1000.00mm Gate 2 (Status): OFF

MTL VEL: 5920 M/S Gate 1(Echo height): 0 %

REJECT: 12 % Gate 1(Beam Path): 0.00mm

DELAY: 0.06mm Gate 1(Surface Distance): 0.00mm

PROBE ZERO: 8.78us Gate 1(Depth): 0.00mm

MODE: SINGLE Gate 2(Echo height): PROBE ANGLE: 17.5DEG

Gate 2(Beam Path): mm THICK: 100.00mm

Gate 2(Surface Distance): mm

Gate 1 (Status): PLOGIC

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:12:4
UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC153 *

(A-Scan)

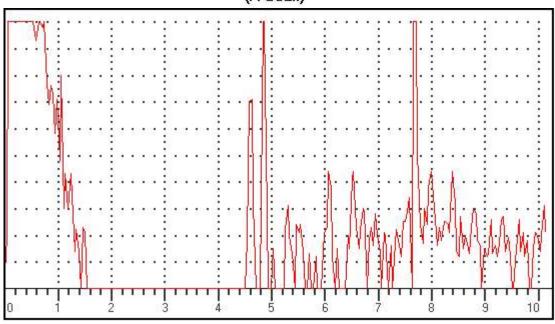

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:12:5 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC154 *

(A-Scan)

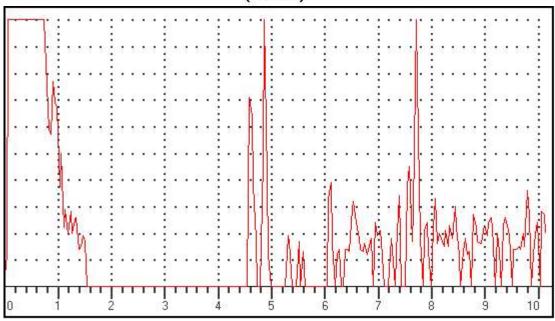

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:12:5 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC155 *

(A-Scan)

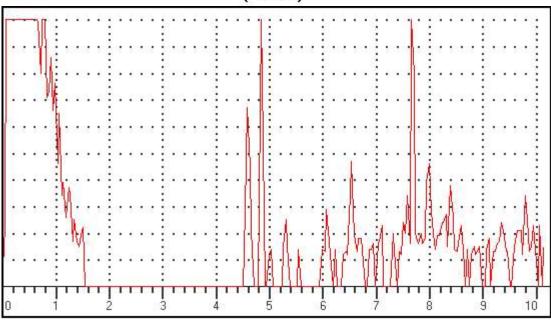

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time......:Dt:4/6/2025 Tm:12:5 UFD Model: <u>Arya 1(R)</u> Sr No:<u>AA0362-422</u>0

Railway/Workshop.....: BS PLW

Type of Axle/wheel....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC156 *

(A-Scan)

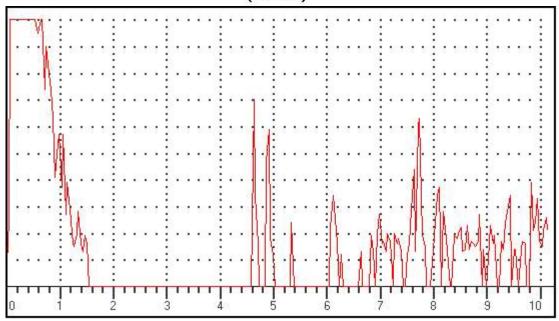

Data Setup

Gain: 51.0 dB

RANGE: 1000.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 17.5DEG

THICK: 100.00mm

Gate 1 (Status): PLOGIC

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm


Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and TimeDt:4/6/2025 Tm:12:5	
UFD Model: <u>Arya 1(R)</u> Sr No: <u>AA0362-422</u> 0	
Railway/Workshop: BS PLW	
Type of Axle/wheel: WAG9	Axle/wheel No:28952
Operator Name/Code : CK MISHRA	
Defect LocationFE	
Test Results (Pass/Fail/other):	
If other, then Remarks	

(A-Scan)

.....

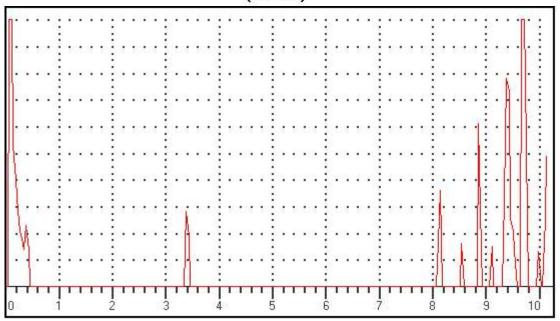

Data Setup Gain: 38.0 dB Gate 1 (Status): OFF RANGE: 2500.00mm Gate 2 (Status): OFF MTL VEL: 5920 M/S Gate 1(Echo height): 0 % REJECT: 12 % DELAY: 0.06mm PROBE ZERO: 8.78us MODE: SINGLE PROBE ANGLE: 0.0DEG

Gate 1(Beam Path): 0.00mm Gate 1(Surface Distance): 0.00mm Gate 1(Depth): 0.00mm Gate 2(Echo height): Gate 2(Beam Path): mm Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Observation/Remarks (If Any):

THICK: 100.00mm

Frame No: ASC157 *

Date and Time.......:Dt:4/6/2025 Tm:12:6

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28952


Operator Name/Code : CK MISHRA

Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks......Frame No: ASC158 *

(A-Scan)

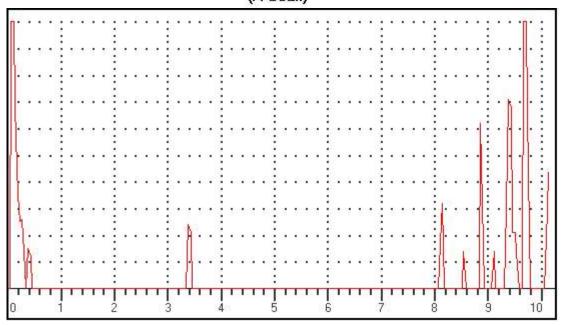

Data Setup

Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):


Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Frame No: ASC159 *

(A-Scan)

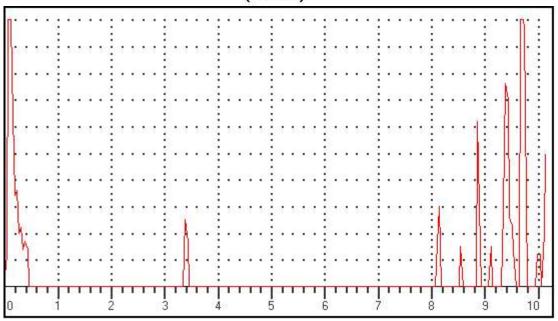

Data Setup Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

Date and Time.......:Dt:4/6/2025 Tm:12:6

UFD Model: Arya 1(R) Sr No:AA0362-4220

Railway/Workshop.....: BS PLW

Type of Axle/wheel.....: WAG9 Axle/wheel No:28952

Operator Name/Code : CK MISHRA


Defect Location: FE

Test Results (Pass/Fail/other):

If other, then Remarks.....

Frame No: ASC160 *

(A-Scan)

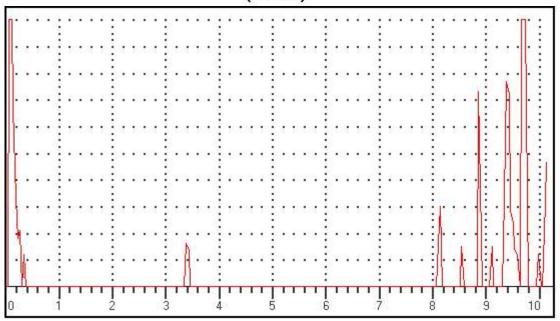

Data Setup

Gain: 38.0 dB

RANGE: 2500.00mm

MTL VEL: 5920 M/S

REJECT: 12 %

DELAY: 0.06mm

PROBE ZERO: 8.78us

MODE: SINGLE

PROBE ANGLE: 0.0DEG

THICK: 100.00mm

Gate 1 (Status): OFF

Gate 2 (Status): OFF

Gate 1(Echo height): 0 %

Gate 1(Beam Path): 0.00mm

Gate 1(Surface Distance): 0.00mm

Gate 1(Depth): 0.00mm

Gate 2(Echo height):

Gate 2(Beam Path): mm

Gate 2(Surface Distance): mm

Gate 2(Depth): mm

TOP 12 COSTLIEST ITEMS OF WAG9HC LOCO WITH WARRANTY CONDITIONS AS PER TENDERS

S No	PL No	DESCRIPTION	Warranty Period
1	29741075	IGBT BASED 3-PHASE DRIVE PROPULSION EQUIPMENT	60 months after commissioning or 72 months from date of supply whichever earlier as per special conditions given by CLW
2	29731057	MAIN TRANSFORMER 7775 KVA TYPE LOT 7500 FOR WAP7 3- PHASE ELECTRIC LOCOMOTIVE TO CLW SPECN NO.CLW/ES/3/0660/C	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
3	29171064	COMPLETE SHELL ASSLY (PIPED & PAINTED) FOR WAP-7 LOCO TO CLW SPEC. NO. CLW/MS/3/152 ALT- 8	AS PER IRS CONDITIONS-30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER.
4	29600418	LOCOMOTIVES TO CLW SPECN. NO. CLW/ES/03/646 ALT-NIL WITH DMW REQUIREMENT OF HARNESSED	As per clause no.9 of CLW Specn. CLW/ES/3/0458 & Clause No.10 of CLW SpecnCLW/ES/3/0459. [18 months after commissioning or 20 months from date of supply for single core & 18 months after commissioning or 24 months from date of supply for multi core]

7	29942007	3-PHASE ASYNCHRONOUS TRACTION MOTOR (RESISTANCE RING MECHANICALLY INTERLOCKED TO END PLATE DESIGN ROTOR, SCHEME-II), TYPE 6FRA-6068 FOR WAP-7 ELECTRIC LOCO WITHOUT ACTIVE SPEED SENSOR TO SPECIFICATION NO. 4TMS.096.081 ALT-2 AND STR NO. CLW/2008/3PHTM/STR/0001.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
6	29480140	COMPLETE FILTER CUBICLE ALONG WITH ALL EQUIPMENTS AND CABLING TO DRG./SPEC NO. [1] CLW/ES/3/0193 ALT-F OR LATEST AND CLW DRG. NO. 1209-15-143-004 ALT-10 AND PART DRG./SPEC NO AS PER ANNEXURE-A ATTACHED.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
5	29180016	BRAKE CONTROL SYSTEM INCLUDING DRIVER'S VIGILANCE CONTROL DEVICE TO SET LIST NO.EL29180016.	As per specification no. CLW/MS/3/001 Alt. 16 i.e. the manufacturer is required to guarantee that the brakevalves/equipment work satisfactorily for a period of five (5) years after commissioning. Any equipment/part which failsduring the guarantee period shall be replaced free of cost by the manufacturer. The replaced components shallfurther be under warranty for five (5) years from the date of their fitment and should the replaced components proveunsatisfactory in service, they shall be replaced by modified and improved components by the supplier free of cost.

8	29105146	Bogie Frame Complete for WAP-7 for 3 Phase Co Co Locomotive to CLW specification No. CLW/MS/3/Bogie/003 alt-1 and CLW Drg.No.1209.01.112-202 Alt-Nil	As per clause 16 of Spec.No.CLW/MS/3/Bogie/003 Alt-1. [60 months after commissioning or 72 months from date of supply]
9	29171192	COMPLETE AUXILIARY CUBICLE HB2 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0192 ALT-E OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
10	29171210	COMPLETE CONTROL CUBICLE SB2 ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0195/A ALT-H OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
11	29171209	COMPLETE CONTROL CUBICLE SB1 (PUSH PULL SCHEME COMPLIANT) ALONG WITH ALL EQUIPMENTS AND CABLING (EXCLUDING CONTROL ELECTRONICS) TO CLW SPECN. NO. CLW/ES/3/0194 ALT-G OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.
12	29171180	COMPLETE AUXILIARY CUBICLE HB1 ALONG WITH ALL EQUIPMENTS AND CABLING TO CLW SPEC.NO.CLW/ES/3/0191 ALT-D OR LATEST FOR WAP7 LOCO WITH HOTEL LOAD WITH BARE CUBICLE AS PER CLW SPEC.NO.CLW/MS/3/155 ALT-NIL.	AS PER IRS CONDITIONS OF CONTRACT [i.e. 30 MONTHS FROM THE DATE OF SUPPLY OR 24 MONTHS FROM THE DATE OF COMMISSIONING, WHICHEVER IS EARLIER] WILL BE APPLICABLE.



भारत सरकार GOVERNMENT OF INDIA

रेल मंत्राल्य

MINISTRY OF RAILWAYS

पटियाला रेलइंजन कारखाना

PATIALA LOCOMOTIVE WORKS

Email: dyceeloco.dmw@gmail.com फैक्स/Fax No.: 0175-2397244

फोन/ Phone: 0175- 2396422 मोबाईल: 9779242310 पटियाला, 147003, भारत

PATIALA, 147003, INDIA



(An ISO 9001, ISO 14001, ISO 45001 & ISO 50001, 5S & Green Building certified Organization)

No. PLW/M/ECS/Tech/Kavach

Date: As signed

(Through Mail)

Sr. Div. Electrical Engineer, Diesel Loco Shed, Malda Town.

Email: srdeetrsmldd@gmail.com

Sub:- Fitment of KAVACH in three Phase Electric Loco. No. 42051 WAG9-HC.

Ref:- (i). Director General Stds./Electrical/RDSO letter no. EL/0.1.3/3 dated 21.08.2023.

(ii).Director General Stds./Electrical/RDSO letter no. EL/0.1.3/3 dated 26.09.2023

In ref. to the above letter's Loco No. 42051 has been dispatched with fittings for implementation of KAVACH system in locomotive at home shed in Zonal Railway. This Loco was dispatched to DLS/MLDD/NFR on 22.07.2025. The details of fittings are attached as Annexure-A (pneumatic fittings), Annexure-B (Kavach equipment mounting Brackets) & Annexure-C (Wago with harnessed lay out).

This is for your information & necessary action please.

Digitally signed by NISHANT BANSIWAL Date: 2025.08.06 18:32:54 +05'30'

(निशांत बंसीवाल)

उप मुख्य विद्युत अभियंता/लोको

प्रतिलिपि:-

CEE/Loco & CEE/D&Q, CMM, CELE/NFR:- for kind information please Dy CME/Design, Dy. CMM/Depot: for information & necessary action please AEE/LAS, AWM/LFS&ABS, AWM/ECS: for necessary action please

Loco No. 42051

SN	PL No.	Description of Item	Qfy.
1	29163341	ISOLATING COCK 3/8" (FEMALE) LEGRIS TYPE WITH VENT	04 nos.
	25105541	ISOLATING COCK 3/8" (FEMALE) LEGRIS TYPE WITHOUT VENT	02 nos.
		TEE UNION 3/8"X3/8"X3/8" BRASS FITTINGS	02 nos.
		MALE CONNECTORS 3/8" TUBE OD X 3/8" BSPT, BRASS FITTINGS	09 nos.
		MALE CONNECTORS 1/2" TUBE OD X 1/2" BSPT, BRASS FITTINGS	06 nos.
	29611994	FEMALE CONNECTORS (NYLON TUBE) DIA 6 TUBE X 3/8" BSPP BRASS FITTINGS	01 no.
		MALE CONNECTOR (NYLON TUBE) DIA 6 TUBE X 3/8" BSPP BRASS FITTINGS	03 nos
2		FEMALE TEE 3/8" BSPP – BRASS	06 nos
		HEX PLUG -3/8" BSPT — BRASS	02 nos
		FEMALE TEE 1/2" BSPP – BRASS	04 nos
		HEX NIPPLE 3/8X3/8" BSPT – BRASS	04 nos
		RED HEX NIPPLE 3/8X1/2" BSPT - BRASS	02 nos
		HEX PLUG – 1/2" BSPT – BRASS	04 nos
		MALE ELBOW CONNECTORS 3/8" TUBE OD X 3/8) BSPT. BRASS FITTINGS	02 nos
3	29170114	Copper Tube OD 9.52mm (3/8") X 1.245 Mm W.T X 6 Mtr	1.2Mtr

AWMIABSETES

SSE/G/ABS

SN	PL No.	Description of item	Quantity
1.	29611945	Mounting bracket arrangement provided for RF Antenna on the roof top of both driver cabs.	04 nos.
2.		Mounting bracket arrangement provided for GPS/GSM Antenna on the roof top of both driver cabs.	02 nos.
3.		Protection Guards for RFID reader provided behind the cattle guards of both side.	04 nos.
4.		Inspection door with latch provided on the both driver desk covers (LP side) in each cab to access isolation cock.	02 nos.
5.		Cable Entry Plate fitted for routing of cable with RF Antenna & GPS/GSM Antenna bracket.	06 nos.
6.	_ ,	WAGO bracket fitted in Machine room at back side of SB-1.	01 no.
7.	-	One circular hole of 80 mm dia provided in each cabs on LP side behind the driver desk toward the wall for routing of OCIP (DMI) cables.	02 nos.
8.	_	80 mm holes provided on TM1 and TM6 Junction box inspection cover hole for drawing of RFID reader cables.	02 nos.
9.	-	DIN Rail fitted inside the driver desk (LP Side)	02 nos.

AWMABS & LFS

SSE/G/LFS

Annexure-C

PL No.	Description of Item	Quantity
42310301	Flexible conduit size 25mm ² provided for RF-1, 2 & GPS Antenna cable layout from CAB-1&2 to Machine room.	06 mtr
29611982	Wago terminals in CAB-1&2 (25 nos. in each CAB).	50 nos.
29611982	Wago terminal in Machine room at back side of \$B-1.	75 nos.
-	Harness provided from KAVACH SB to SB-1	07 wires
-	Harness provided from KAVACH SB to SB-2	05 wires
-	Harness provided from KAVACH SB to Pneumatic Panel	12 wires
- 1	Harness provided from KAVACH SB to CAB-1	24 wires
	Harness provided from KAVACH SB to CAB-2	16 wires
	42310301 29611982	42310301 Flexible conduit size 25mm² provided for RF-1, 2 & GPS Antenna cable layout from CAB-1&2 to Machine room. 29611982 Wago terminals in CAB-1&2 (25 nos. in each CAB). 29611982 Wago terminal in Machine room at back side of SB-1. - Harness provided from KAVACH SB to SB-1 - Harness provided from KAVACH SB to Pneumatic Panel - Harness provided from KAVACH SB to CAB-1

AWMECS

SSEGIECS